



**READ THROUGH THIS MANUAL
BEFORE STARTING CONSTRUCTION.
IT CONTAINS IMPORTANT INSTRUCTIONS
AND WARNINGS CONCERNING THE
ASSEMBLY AND USE OF THIS MODEL.**



SPECIFICATION

- Wingspan: 2700mm (106.3 in)
- Length: 2531mm (99.6 in)
- Flying weight: 19-22 Kg
- Wing type: Naca airfoils
- Radio: 16 channel minimum (Not Included)
- Servo: - 2 aileron; 2 flap
(Mount 20mm X 40mm) (not included)
 - 2 elevator; 1 rudder; 1 Nose steering
(Mount 20mm X 40mm) (not included)
- Engine: Turbine Jet Engine with 16-20 KG
(not included)
- Gravity CG: 200 mm (7.87 in) Back from
the leading edge of the wing, at the fuselage

- Control throw Ailerons: Low: 15mm up/down;
High: 20mm up/down
- Control throw Elevators: Low: 15mm up/down;
High: 20mm up/down
- Control throw Rudder: Low: 30mm right/left;
High: 40mm right/left
- Control throw Flaps: Mid: 40mm down; Land-
ing: 90mm down
- Experience level: Intermediate
- Plane type: Scale Military



UNDER SAFETY PRECAUTIONS **This radio control model is not a toy!**

- It is highly recommended that first-time builders seek advice of experienced modelers before beginning assembly.
- Assemble this kit only in places out of children's reach!
- Take enough safety precautions prior to operating this model.
You are responsible for this model's assembly and safe operation!
- Always keep this instruction manual ready at hand for quick reference, even after completing the assembly.

TABLE OF CONTENTS

Introduction	1	Installing the elevator	19
Warranty.....	2	Installing the elevator servo	20
Disclaimer.....	2	Installing the elevator pushrod.....	20
Safety precaution	2	Installing the small fin	21
Important building notes.....	2	Installing the navigation gear light	22
Suggestion.....	2	Installing the nose gear retract.....	24
Flight warnings.....	2	Nose door installing.....	25
Flight warnings.....	3	Installing the engine	28
Electric ducted fan recommended	3	Installing the fuel tank	28
Covering tools.....	3	Balancing.....	31
Adhesives and required tools	3	Lateral balance	31
Academy of model aeronautics national model aircraft safety code.....	3	Flight preparation pre flight check	34
Installing the ailerons and flap	5	Main gear dimensional detail.....	35
Installing the aileron and flap servo	5	Nose gear dimensional detail.....	35
Installing the aileron and flap pushrod	6	Exploded view	36
Installing the main landing gear	8	Exploded view	37
Installing the composite boom	12	Exploded view	38
Installing the composite wing side	12		
Electric retract system	15		
Joining the fuselage	15		
Secure the wing to the fuselage.....	16		
Installing the vertical and stabilizer pushrod.....	18		

INTRODUCTION

Thank you for purchasing Phoenix Model products. With over 20 years experience in production and fly testing, Phoenix Model is committed to bring the best quality products and good service to customers. Along with a team of creative engineers and skilled workers, we will always accompany with customers by our great experiences, fully enthusiasm... which will burn our passion!! Joining with us to explore and conquer challenges in the sky ...

Your satisfaction is our success. Please read through this manual before starting construction.

Academy of Model Aeronautics: If you are not already a member of the AMA, please join! The AMA is the governing body of model aviation and membership provides liability insurance coverage, protects modelers' rights and interests and is required to fly at most R/C sites.

Academy of Model Aeronautics
5151 East Memorial Drive Muncie, IN 47302-9252

Tele. (800) 435-9262
Fax (765) 741-0057

Or via the Internet at: <http://www.modelaircraft.org>



WARRANTY

Phoenix Model guarantees the component parts in this kit to be free from defects in both material and workmanship at the date of purchase by the purchaser.

This warranty does not cover cosmetic damage or damage due to acts of God, accident, misuse, abuse, negligence, commercial use, or modification of or to any part of the Product.

This warranty does not cover damage due to improper installation, operation, maintenance, or attempted repair by anyone other than Phoenix Model.

Further, Phoenix Model reserves the right to change or modify this warranty without notice.

DISCLAIMER

Read this disclaimer carefully before using this product. Please strictly follow the instruction manual to assemble and use this.

In that Phoenix Model has no control over the final assembly or material used for final assembly, Phoenix Model is not responsible for loss of use, or other incidental or consequential damages.

Furthermore, Phoenix Model cannot be held liable for personal injury or property damage caused by the use or misuse of Phoenix Model products. By the act of using the user-assembled products, the user accepts all resulting liability.

SAFETY PRECAUTION

- This is not a toy and pilots must be over the age of 14
- Be sure that no other flyers are using your radio frequency.
- Do not smoke near fuel
- Store fuel in a cool, dry place, away from children and pets.
- Wear safety glasses.
- The glow plug clip must be securely attached to the glow plug.
- Do not flip the propeller with your fingers.
- Keep loose clothing and wires away from the propeller.
- Do not start the engine if people are near. Do not stand in line with the side of the propeller.
- Make engine adjustments from behind the propeller only. Do not reach around the spinning propeller.
- Moisture causes damage to electronics. Avoid water exposure to all equipment not specifically designed and protected for this purpose.

IMPORTANT BUILDING NOTES

• Please trial fit all the parts. Make sure you have the correct parts and that they fit and are aligned properly before gluing! This will assure proper assembly. This kit is hand made from natural materials, every plane is unique and minor adjustments may have to be made. However, you should find the fit superior and assembly simple.

• The painted and plastic parts used in this kit are fuel proof. However, they are not tolerant of many harsh chemicals including the following: paint thinner, C/A glue accelerator, C/A glue debonder and acetone. Do not let these chemicals come in contact with the colors on the covering and the plastic parts.

• Some parts included in this kit such as the cowl or wheel pants are made of fiberglass, the fibers of which may cause eye, skin and respiratory tract irritation. Never blow into a part to remove fiberglass dust, as the dust will blow back into your eyes. Always wear safety goggles, a particle mask and rubber gloves when grinding, drilling and sanding fiberglass parts. Vacuum the parts and the work area thoroughly after working with fiberglass parts.

SUGGESTION

To avoid scratching your new airplane, do not unwrap the pieces until they are needed for assembly. Cover your workbench with an old towel or brown paper, both to protect the aircraft and to protect the table. Keep a couple of jars or bowls handy to hold the small parts after you open the bag.

FLIGHT WARNINGS

- Always operate in open areas, away from factories, hospitals, schools, buildings and houses etc.
- NEVER fly your aircraft close to people or built up areas.
- NEVER fly near power lines, aerials or other dangerous areas including airports, motorways etc.
- NEVER fly in wet conditions or on windy or stormy days.
- ALWAYS adjust the engine from behind the propeller, and do not allow any part of your body to be in line with the propeller.
- **THE PROPELLER IS DANGEROUS** Keep fingers, clothing (ties, shirt sleeves, scarves) or any other loose objects that could be caught or drawn in, away from the propeller. Take care at ALL times.
- NEVER use damaged or deformed propellers or spinners.
- Keep all onlookers (especially small children and animals) well back from the area of operation. This is a flying aircraft, which will cause serious injury in case of impact with a person or animal.
- DO NOT dispose of empty fuel containers on a fire, this can lead to an explosion.

FLIGHT WARNINGS

- When ready to fly, first extend the transmitter aerial.
- Switch on the transmitter.
- Switch on the receiver.
- Check that the wings are correctly fitted to the fuselage.
- Operate the control sticks on the transmitter and check that the control surfaces move freely and in the **CORRECT** directions.
- Check that the transmitter batteries have adequate power.
- **ALWAYS** take off into the wind.
- If the model does not respond correctly to the controls, land it as soon as possible and correct the fault.
- **ALWAYS** land the model **INTO** the wind, this ensures that the model lands at the slowest possible speed.
- Switch off the receiver.
- Switch off the transmitter.
- Empty the fuel tank after flying, fuel left in the tank can cause corrosion and lead to engine problems.

ELECTRIC DUCTED FAN RECOMMENDED

- We suggest you use the Turbine Jet Engine with 100-140N (not included)

COVERING TOOLS

- Top Flite® MonoKote® Sealing Iron
- Top Flite Hot Sock Iron Cover
- Top Flite MonoKote Trim Seal Iron
- Top Flite MonoKote Heat Gun

ADHESIVES AND REQUIRED TOOLS

- Thin CA
- 30-minute epoxy
- 6-minute epoxy
- Threadlocker thread locking cement
- Mixing sticks
- Mixing cups (GPMR8056)
- Epoxy brushes
- Denatured alcohol
- Canopy Glue
- Felt-tipped pen or pencil
- Flat screwdriver
- Adjustable wrench
- Drill
- Hobby knife
- Masking tape
- Phillips screwdriver (large)
- Phillips screwdriver (small)
- Ruler
- Sandpaper
- Soldering iron
- Solder
- Hex wrench
- Drill bit: 1/16-inch (1.5mm), 5/64-inch (2mm), 1/8-inch (3.2mm), 3/16-inch (4.8mm), 11/64-inch (4.5mm), 13/64-inch (5.2mm), 1/4-inch (6.4mm)

Academy of Model Aeronautics National Model Aircraft Safety Code

Effective January 1, 2014

A. GENERAL: A model aircraft is a non-human-carrying aircraft capable of sustained flight in the atmosphere. It may not exceed limitations of this code and is intended exclusively for sport, recreation, education and/or competition. All model flights must be conducted in accordance with this safety code and any additional rules specific to the flying site.

1. Model aircraft will not be flown:
 - (a) In a careless or reckless manner.
 - (b) At a location where model aircraft activities are prohibited.
2. Model aircraft pilots will:
 - (a) Yield the right of way to all human-carrying aircraft.
 - (b) See and avoid all aircraft and a spotter must be used when appropriate. (AMA Document #540-D.)
 - (c) Not fly higher than approximately 400 feet above ground level within three (3) miles of an airport without notifying the airport operator.
 - (d) Not interfere with operations and traffic patterns at any airport, heliport or seaplane base except where there is a mixed use agreement.
 - (e) Not exceed a takeoff weight, including fuel, of 55 pounds unless in compliance with the AMA Large Model Airplane program. (AMA Document 520-A.)
 - (f) Ensure the aircraft is identified with the name and address or AMA number of the owner on the inside or affixed to the outside of the model aircraft. (This does not apply to model aircraft flown indoors.)
 - (g) Not operate aircraft with metal-blade propellers or with gaseous boosts except for helicopters operated under the provisions of AMA Document #555.
 - (h) Not operate model aircraft while under the influence of alcohol or while using any drug that could adversely affect the pilot's ability to safely control the model.
 - (i) Not operate model aircraft carrying pyrotechnic devices that explode or burn, or any device which propels a projectile or drops any object that creates a hazard to persons or property.

Exceptions:

- Free Flight fuses or devices that burn producing smoke and are securely attached to the model aircraft during flight.
- Rocket motors (using solid propellant) up to a G-series size may be used provided they remain attached to the model during flight. Model rockets may be flown in accordance with the National Model Rocketry Safety Code but may not be launched from model aircraft.
- Officially designated AMA Air Show Teams (AST) are authorized to use devices and practices as defined within the Team AMA Program Document. (AMA Document #718.)
- (j) Not operate a turbine-powered aircraft, unless in compliance with the AMA turbine regulations. (AMA Document #510-A.)
- 3. Model aircraft will not be flown in AMA sanctioned events, air shows or model demonstrations unless:
 - (a) The aircraft, control system and pilot skills have successfully demonstrated all maneuvers intended or anticipated prior to the specific event.
 - (b) An inexperienced pilot is assisted by an experienced pilot.
- 4. When and where required by rule, helmets must be properly worn and fastened. They must be OSHA, DOT, ANSI, SNELL or NOCSAE approved or comply with comparable standards.

B. RADIO CONTROL (RC)


1. All pilots shall avoid flying directly over unprotected people, vessels, vehicles or structures and shall avoid endangerment of life and property of others.
2. A successful radio equipment ground-range check in accordance with manufacturer's recommendations will be completed before the first flight of a new or repaired model aircraft.
3. At all flying sites a safety line(s) must be established in front of which all flying takes place. (AMA Document #706.)
 - (a) Only personnel associated with flying the model aircraft are allowed at or in front of the safety line.
 - (b) At air shows or demonstrations, a straight safety line must be established.
 - (c) An area away from the safety line must be maintained for spectators.
 - (d) Intentional flying behind the safety line is prohibited.
4. RC model aircraft must use the radio-control frequencies currently allowed by the Federal Communications Commission (FCC). Only individuals properly licensed by the FCC are authorized to operate equipment on Amateur Band frequencies.
5. RC model aircraft will not knowingly operate within three (3) miles of any pre-existing flying site without a frequency-management agreement. (AMA Documents #922 and #923.)
6. With the exception of events flown under official AMA Competition Regulations, excluding takeoff and landing, no powered model may be flown outdoors closer than 25 feet to any individual, except for the pilot and the pilot's helper(s) located at the flightline.
7. Under no circumstances may a pilot or other person touch an outdoor model aircraft in flight while it is still under power, except to divert it from striking an individual.
8. RC night flying requires a lighting system providing the pilot with a clear view of the model's attitude and orientation at all times. Hand-held illumination systems are inadequate for night flying operations.
9. The pilot of an RC model aircraft shall:
 - (a) Maintain control during the entire flight, maintaining visual contact without enhancement other than by corrective lenses prescribed for the pilot.
 - (b) Fly using the assistance of a camera or First-Person View (FPV) only in accordance with the procedures outlined in AMA Document #550.
 - (c) Fly using the assistance of autopilot or stabilization system only in accordance with the procedures outlined in AMA Document #560.

C. FREE FLIGHT

1. Must be at least 100 feet downwind of spectators and automobile parking when the model aircraft is launched.
2. Launch area must be clear of all individuals except mechanics, officials, and other fliers.
3. An effective device will be used to extinguish any fuse on the model aircraft after the fuse has completed its function.

D. CONTROL LINE

1. The complete control system (including the safety thong where applicable) must have an inspection and pull test prior to flying.
2. The pull test will be in accordance with the current Competition Regulations for the applicable model aircraft category.
3. Model aircraft not fitting a specific category shall use those pull-test requirements as indicated for Control Line Precision Aerobatics.
4. The flying area must be clear of all utility wires or poles and a model aircraft will not be flown closer than 50 feet to any above-ground electric utility lines.
5. The flying area must be clear of all nonessential participants and spectators before the engine is started.

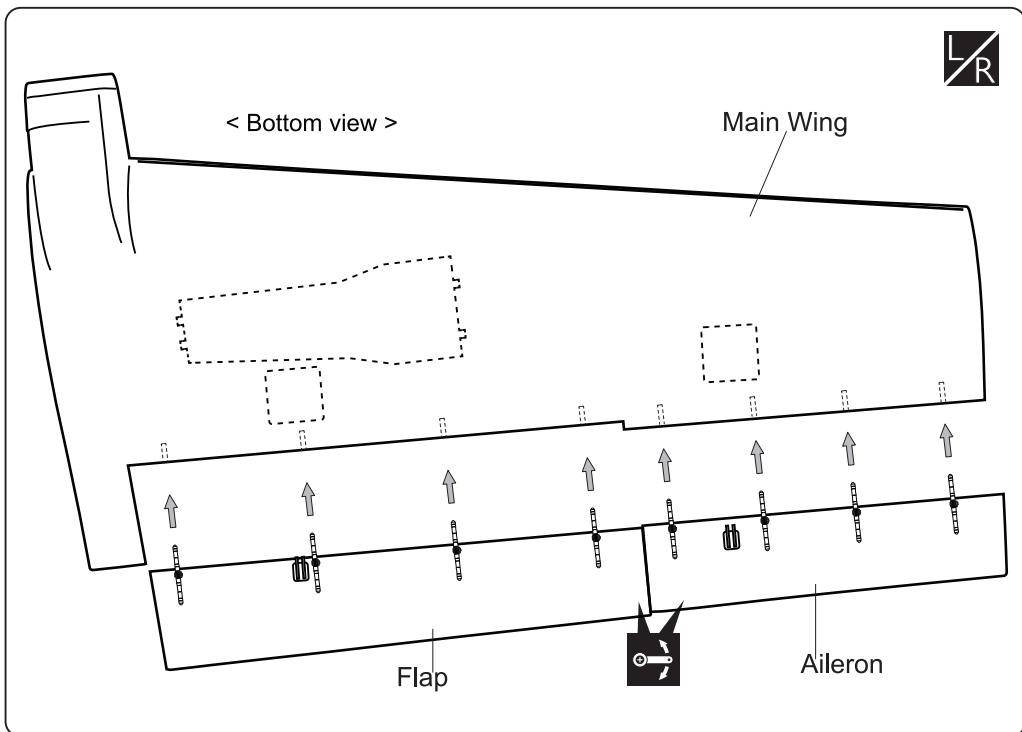
INSTALLING THE AILERONS AND FLAPS

- Assemble left and right sides the same way
- Apply epoxy glue.
- Ensure smooth, non-binding movement when assembling.



Warning!

Make certain the hinges are adequately secured with glue. If they come loose in flight accidents may result.

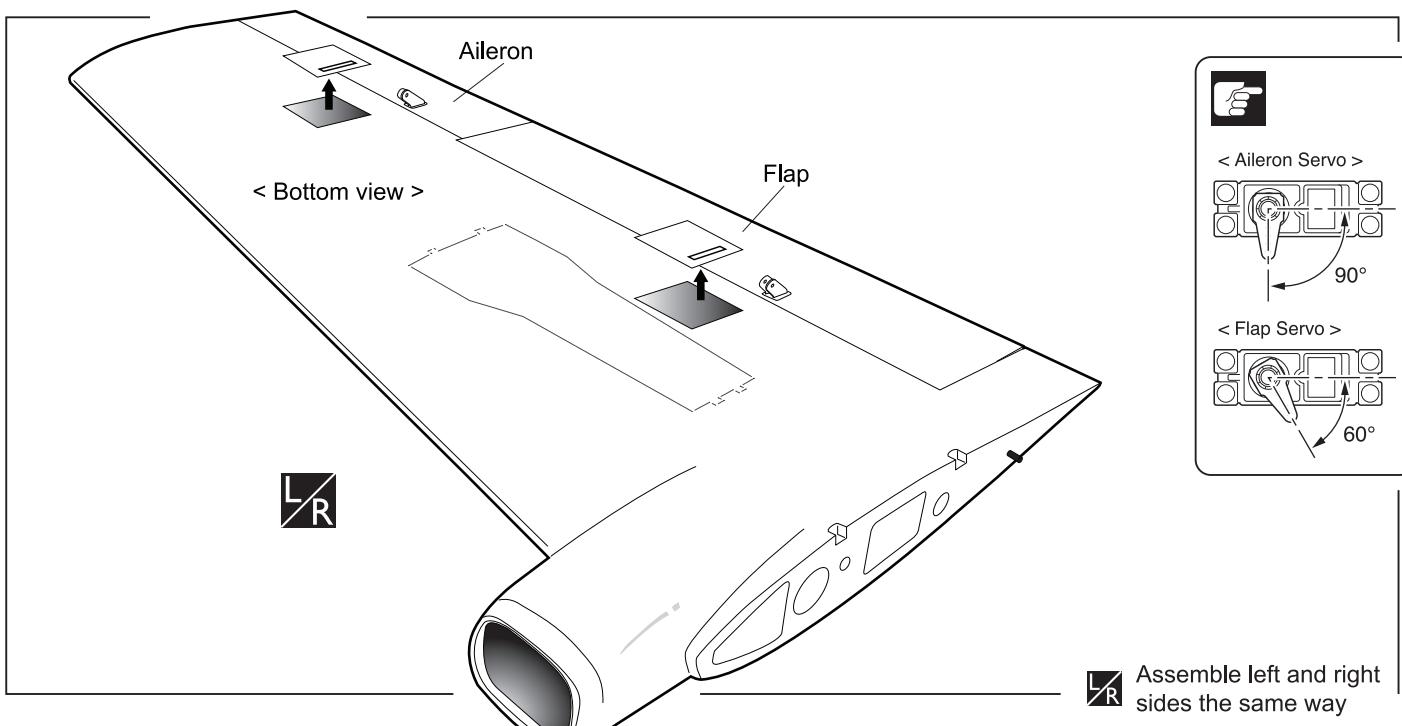
**INSTALLING THE AILERONS AND FLAPS SERVOS**

- Assemble left and right sides the same way


- Pay close attention here!

< Bottom view >

Aileron

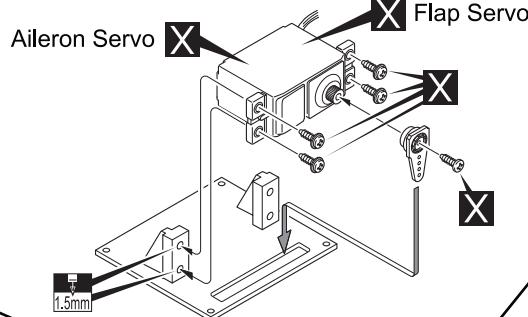

Flap

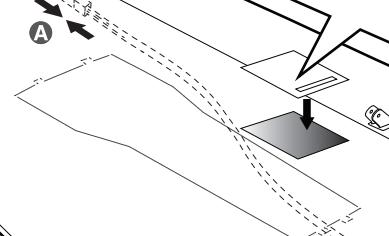

Warning!


- Set all screws securely. If they come off during flight you will lose control of your aircraft!

A Tie the string.

B Pull out servo cord with string.



L/R Assemble left and right sides the same way

X Must be purchased separately!

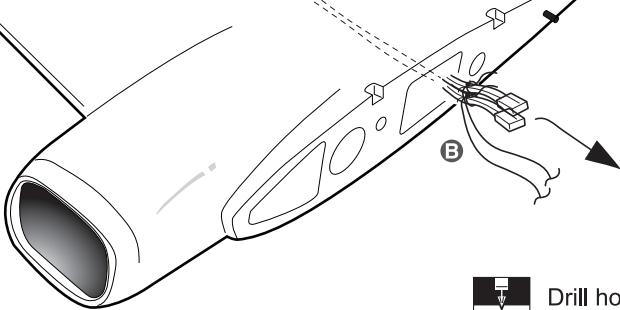

 Drill holes with the Specified diameter.
1.5mm


INSTALLING THE AILERONS AND FLAPS PUSHROD

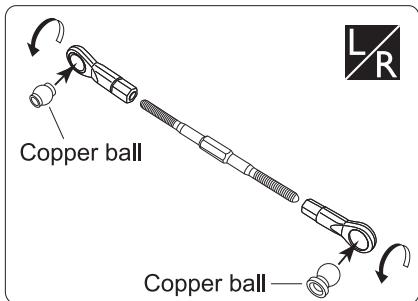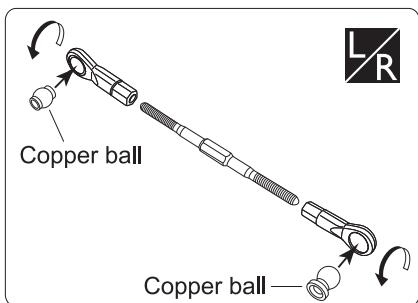

3 x 16mm Button Screw



4

3 x 10mm Button Screw



8

Copper ball



2



2




4

3mm Nut



4

3 x 55mm Push rod



2

3 x 16mm Button Screw



4

3 x 10mm Button Screw




8

Copper ball



2



2




4

3mm Nut





4

3 x 55mm Push rod




2

Assemble left and right sides the same way

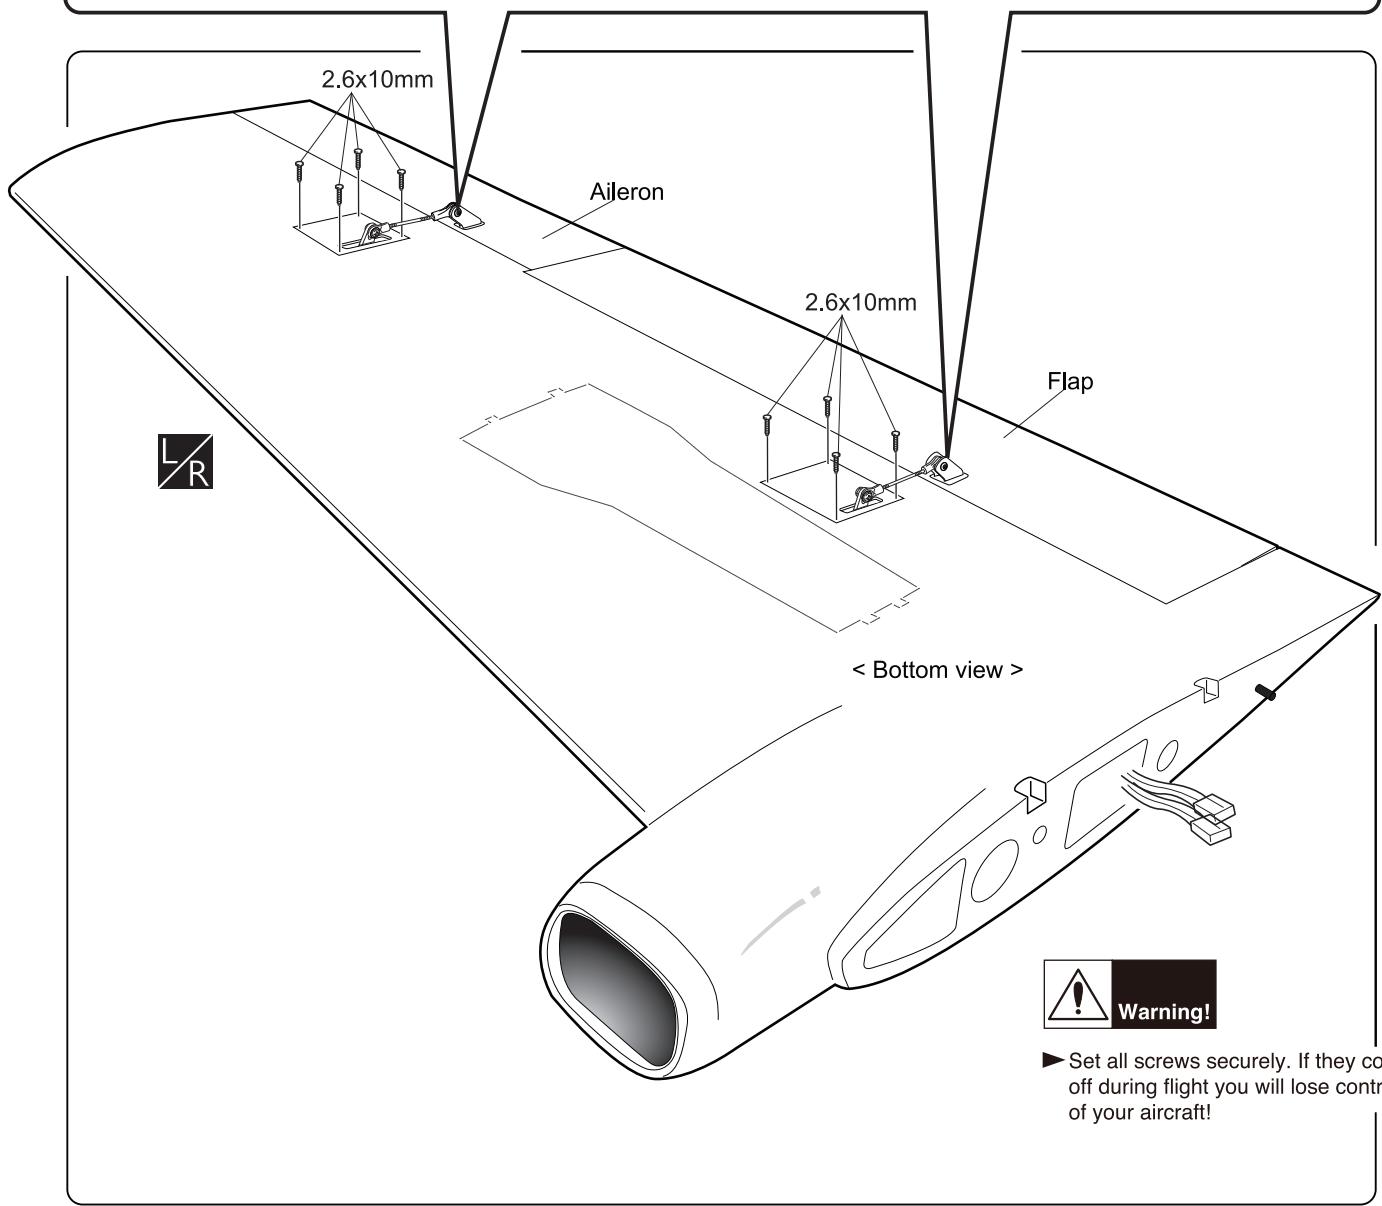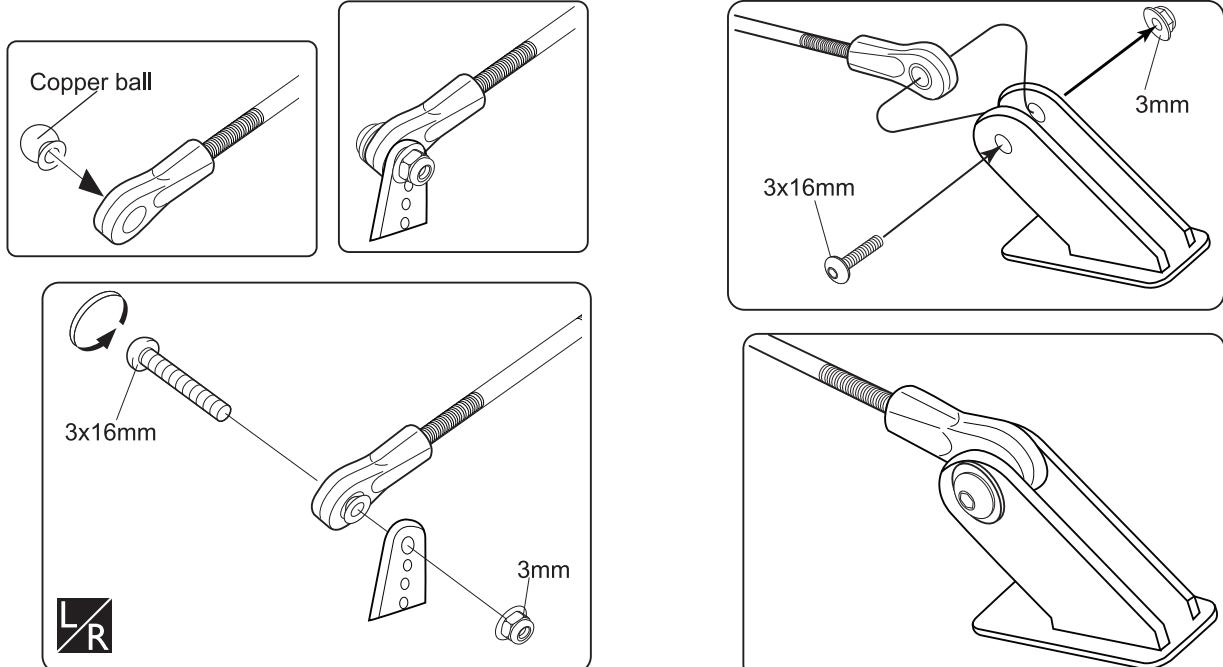


INSTALLING THE MAIN LANDING GEAR

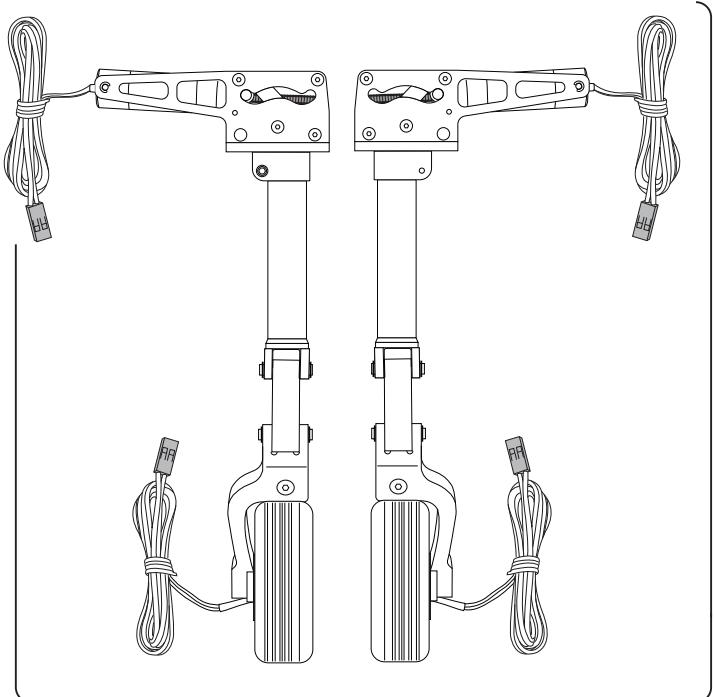

4 x 30mm Button Screw	8
4mm Washer	
Composite gear door	1

3 x 16mm Button Screw	2
3 x 12mm Button Screw	4
3mm Nylon Nut	6
3mm Washer	10
5x3mm Washer	2
Copper ball	4
Plastic Pin Hinges M	4
3 x 25mm Push rod	4
	2

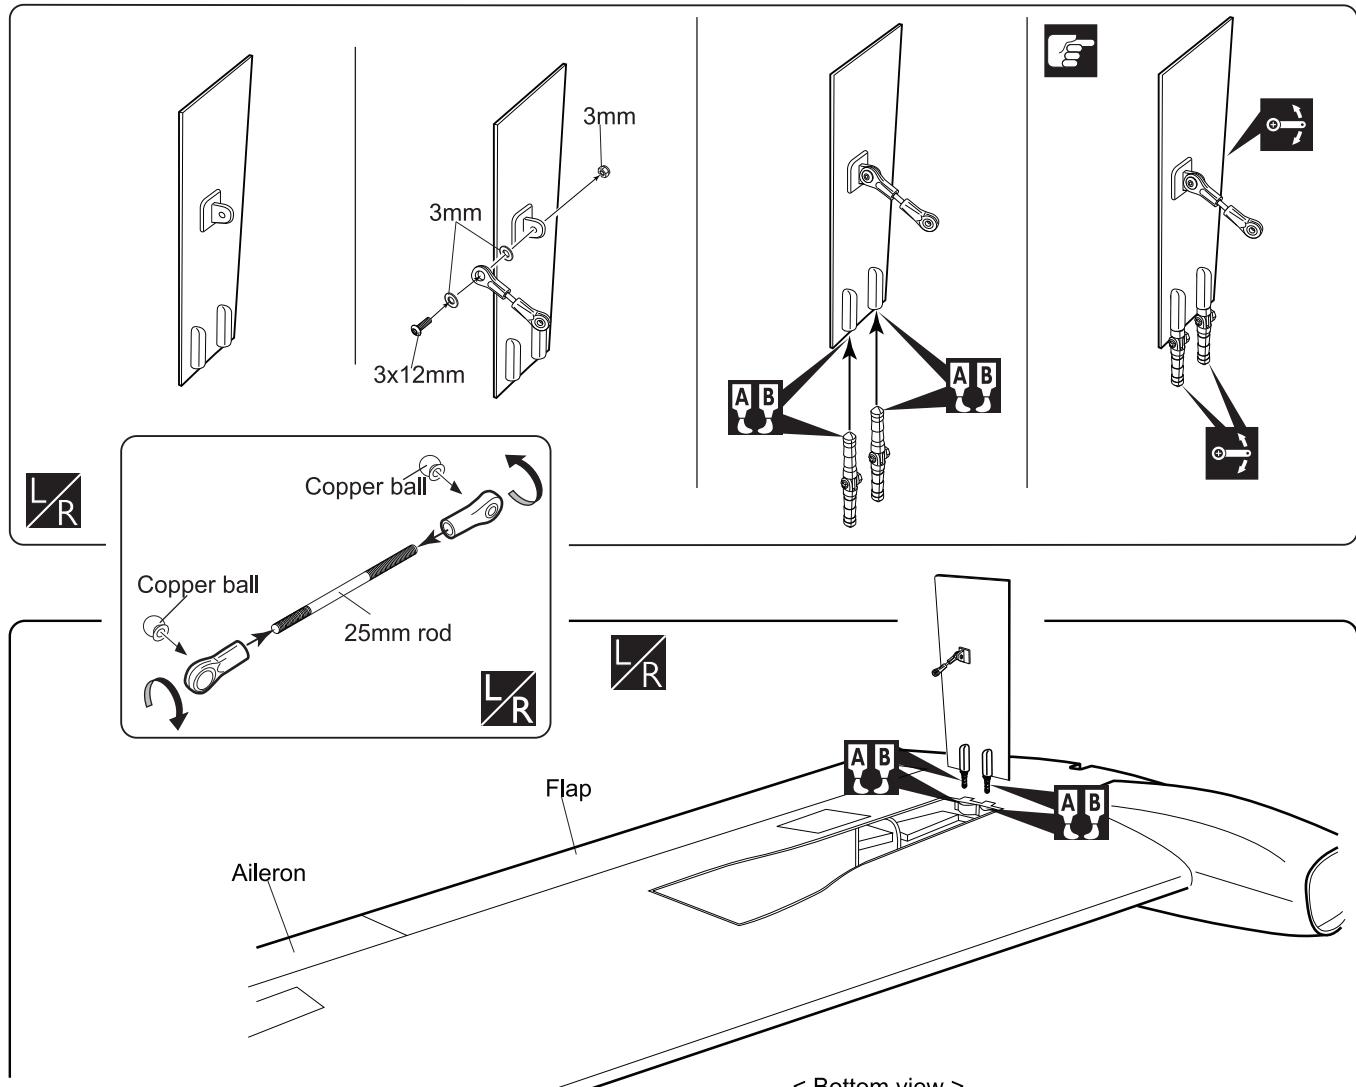


Apply epoxy glue.






Pay close attention here!

Assemble left and right sides the same way







Ensure smooth, non-binding movement when assembling.

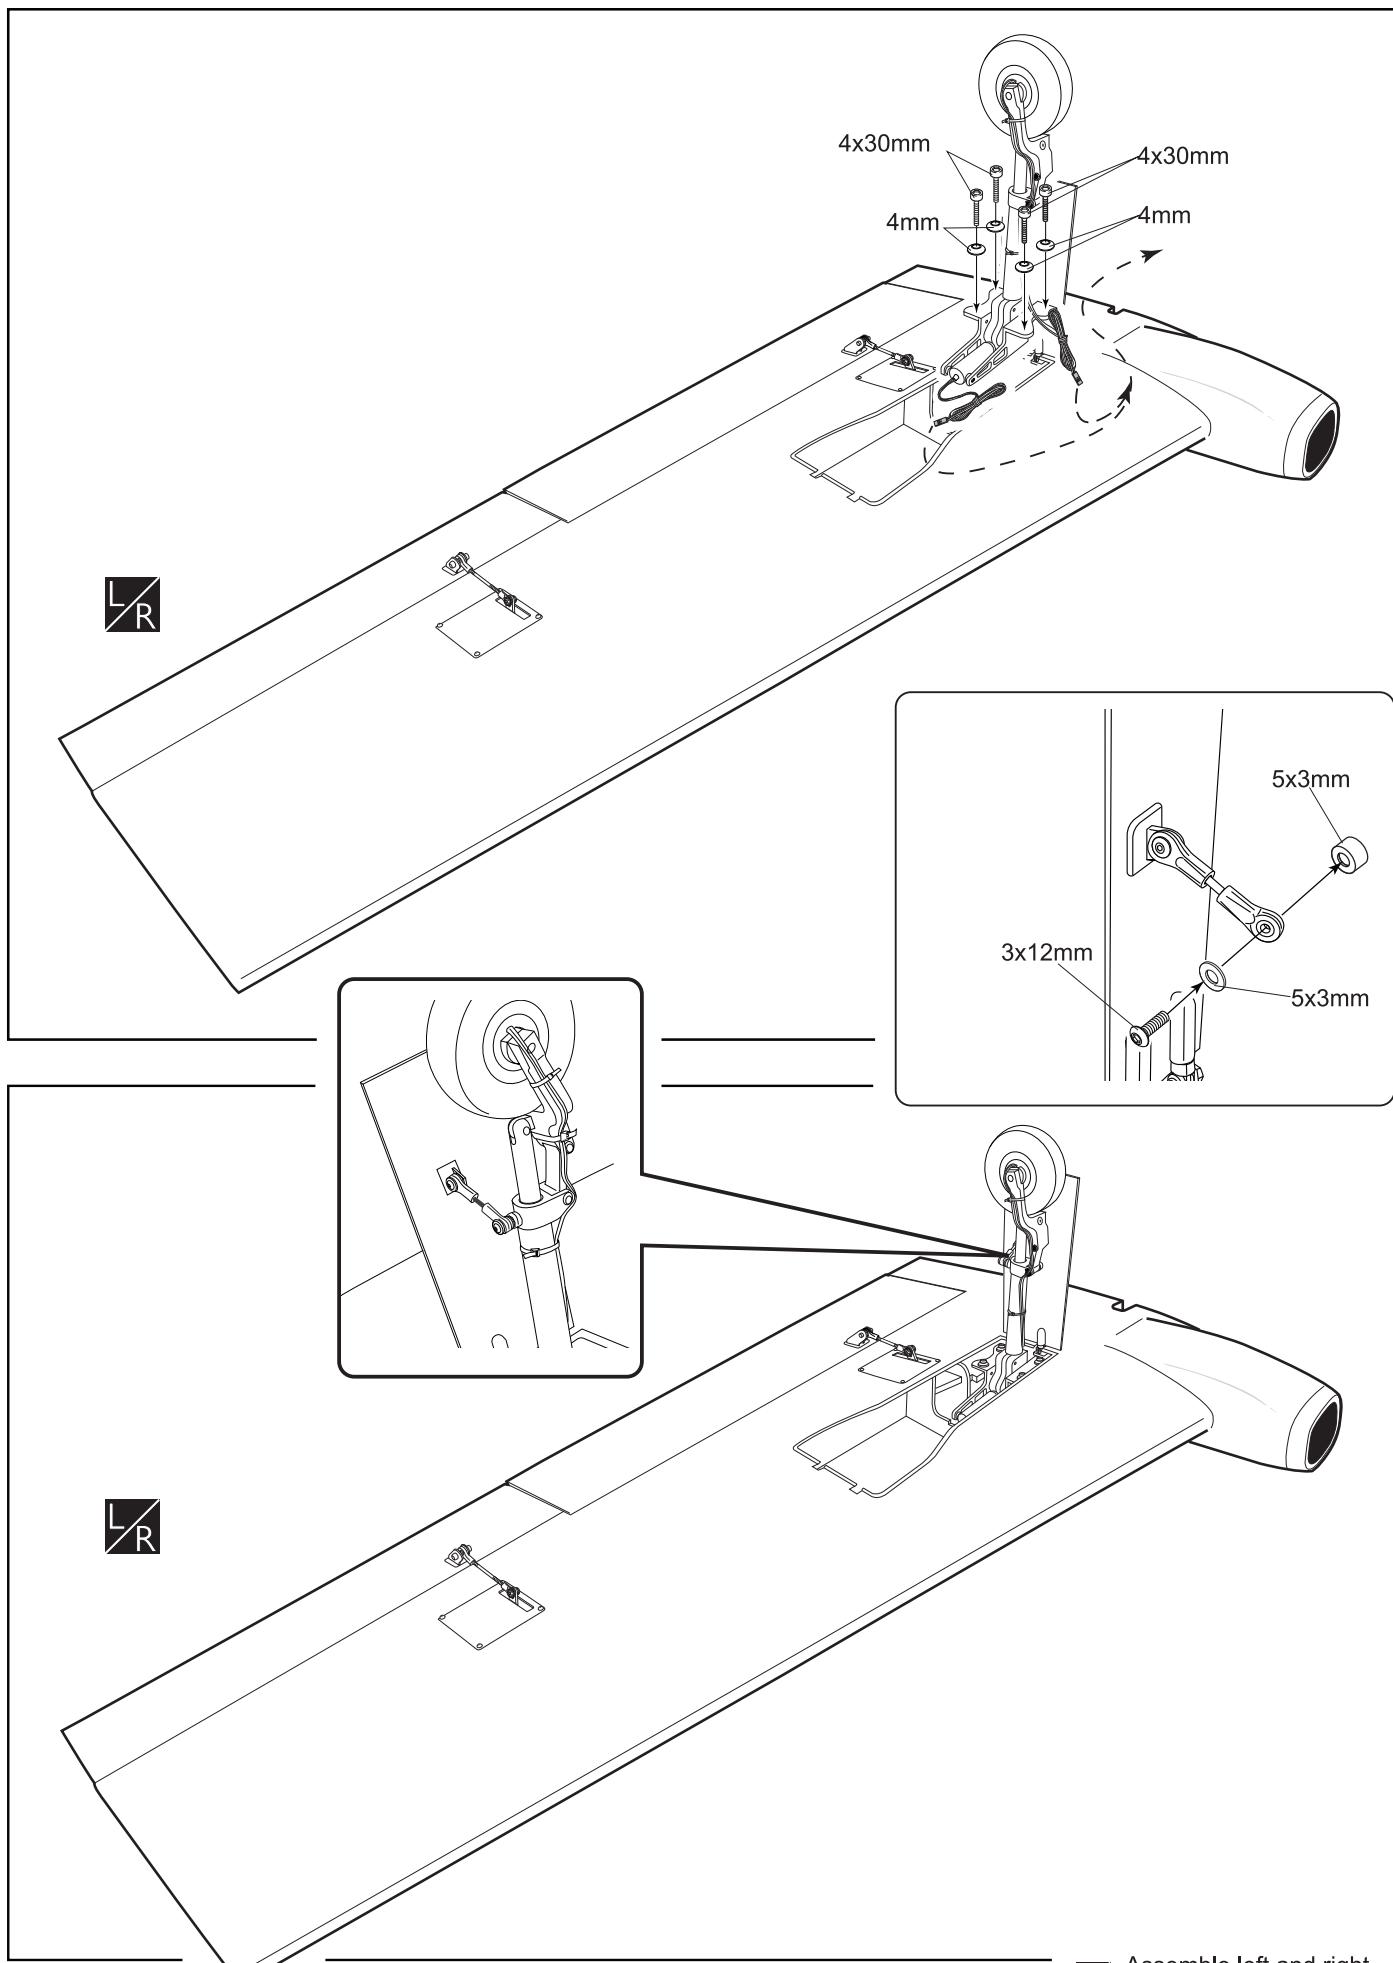

Plastic Hinges	4
Copper ball	4
2mm	4
2,6 x 10mm Button Screw	8
2mm Washer	8
3 x 40mm Push rod	2

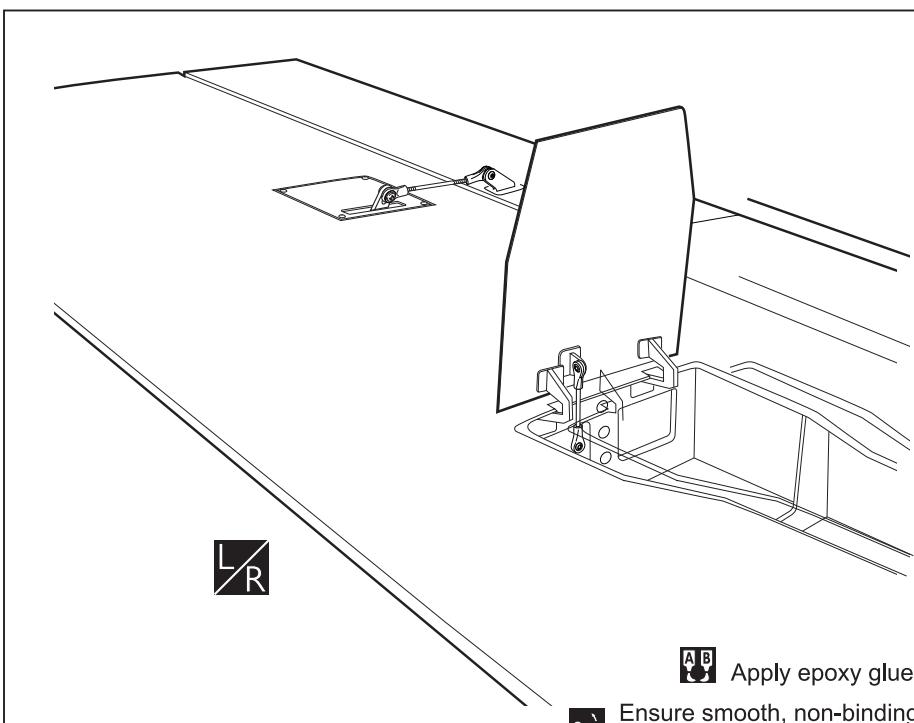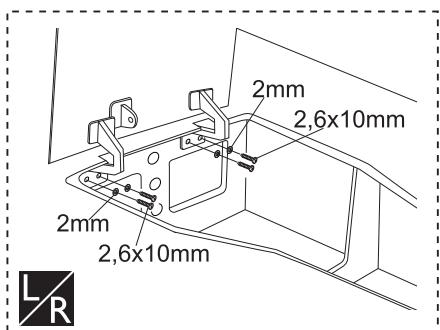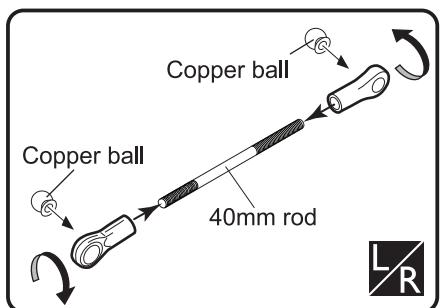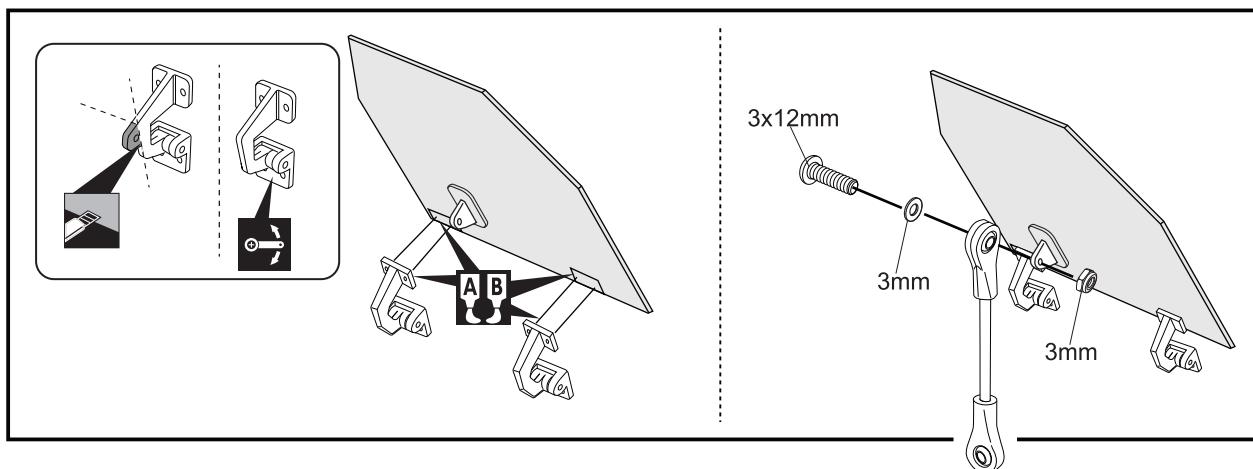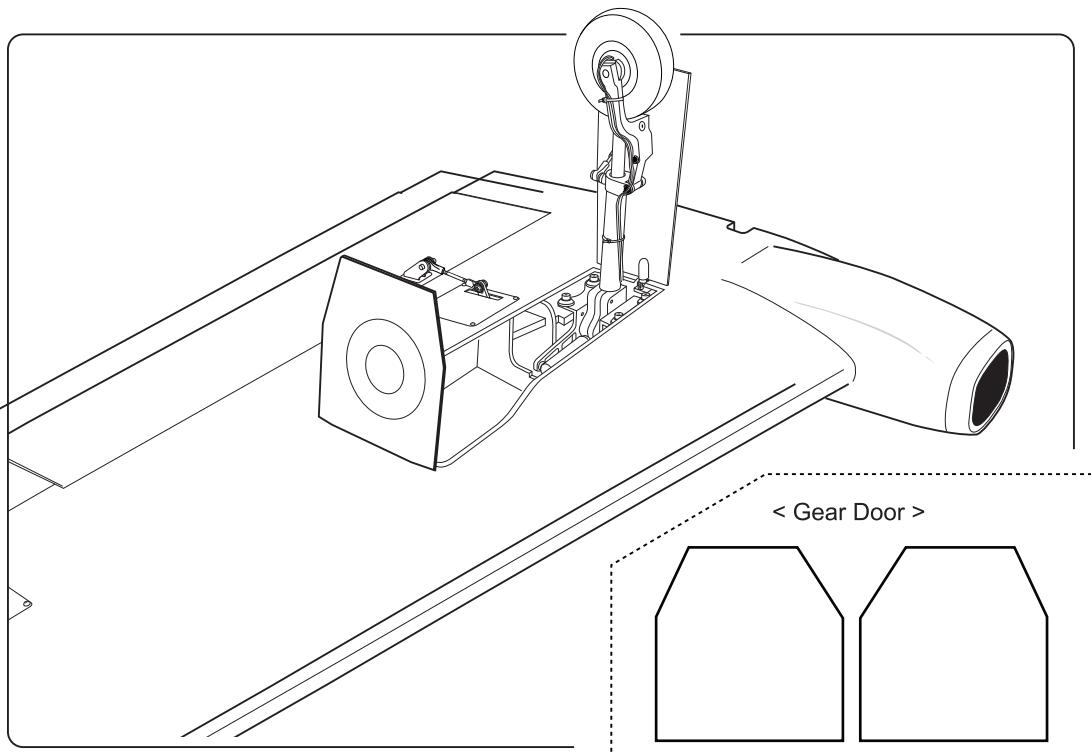


Assemble left and right sides the same way

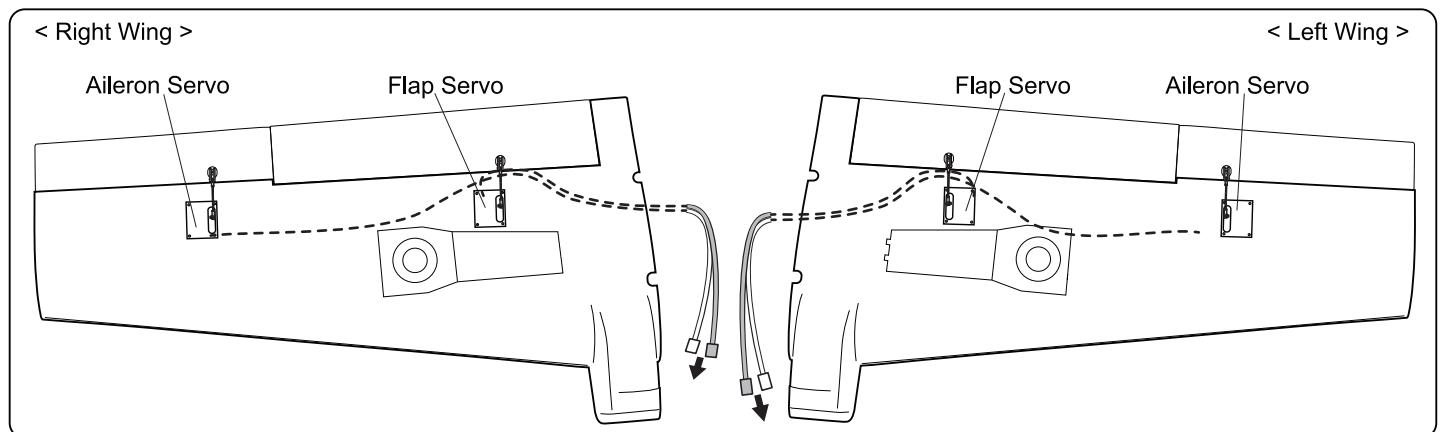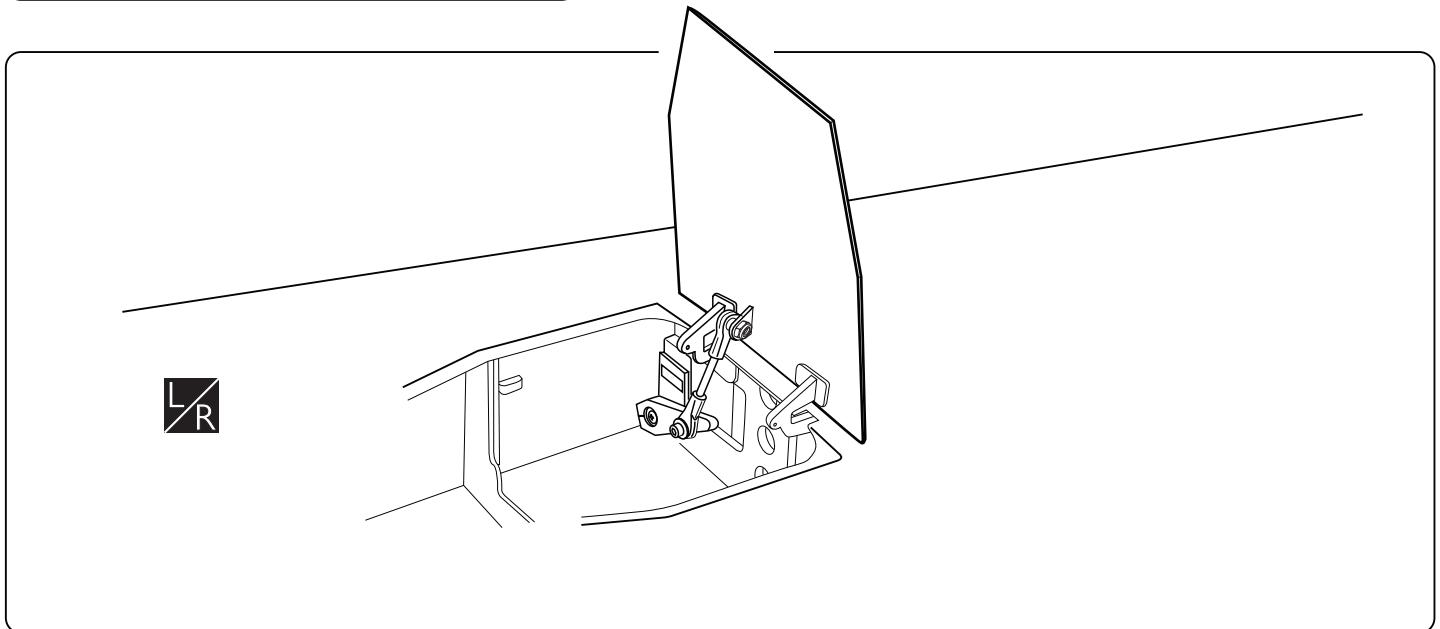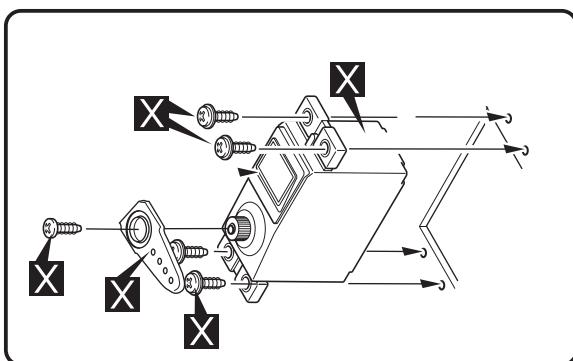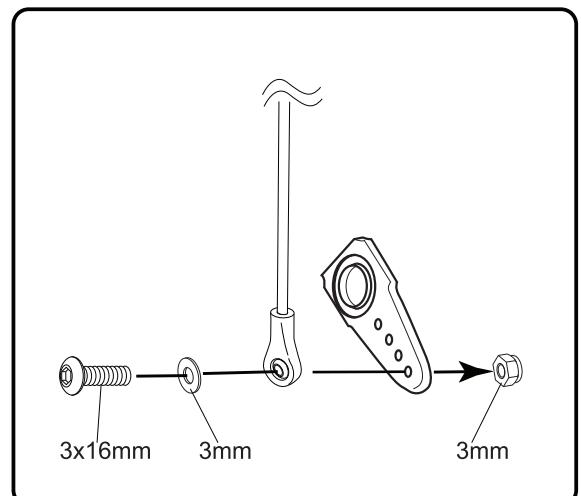

Assemble left and right sides the same way


INSTALL THE COMPOSITE BOMB (NOT INCLUDED WITH THE KIT, NEED TO PURCHASE SEPARATELY)

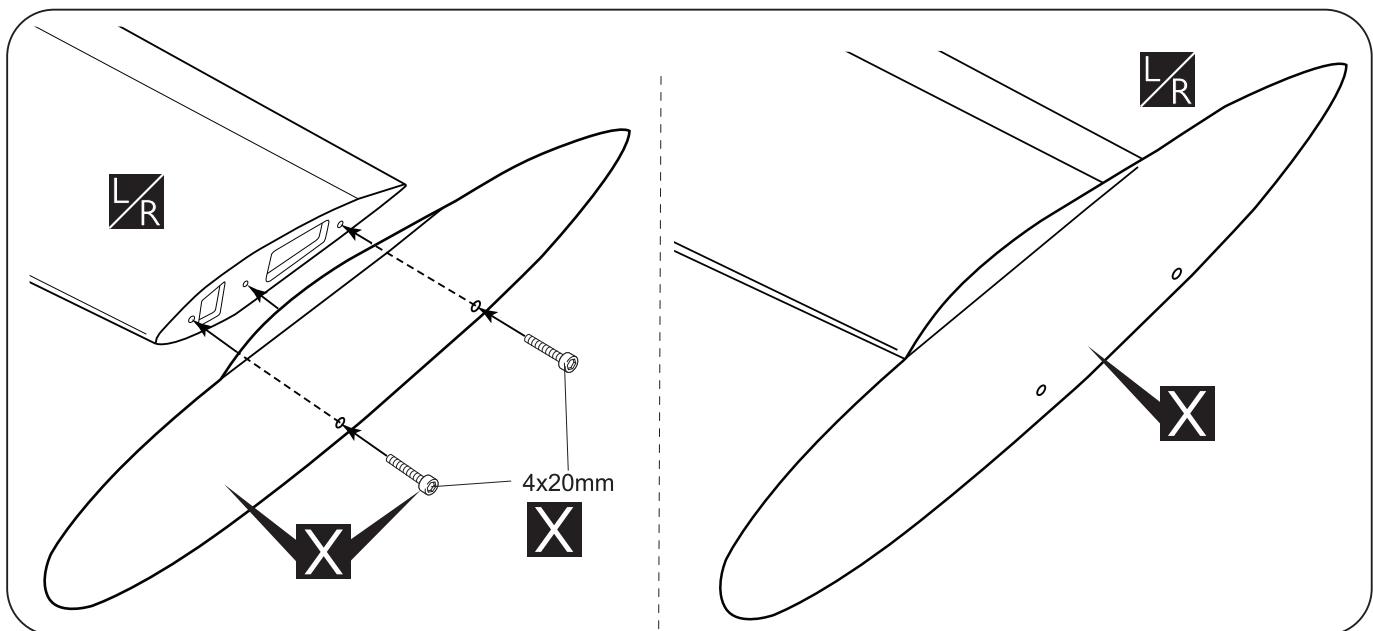

X Must be purchased separately!





INSTALL THE COMPOSITE WING SIDE

4 x 20mm Cap Screw	4
4 x 25mm Cap Screw	4
4mm Washer #2	4
Composite bomb	1
2	

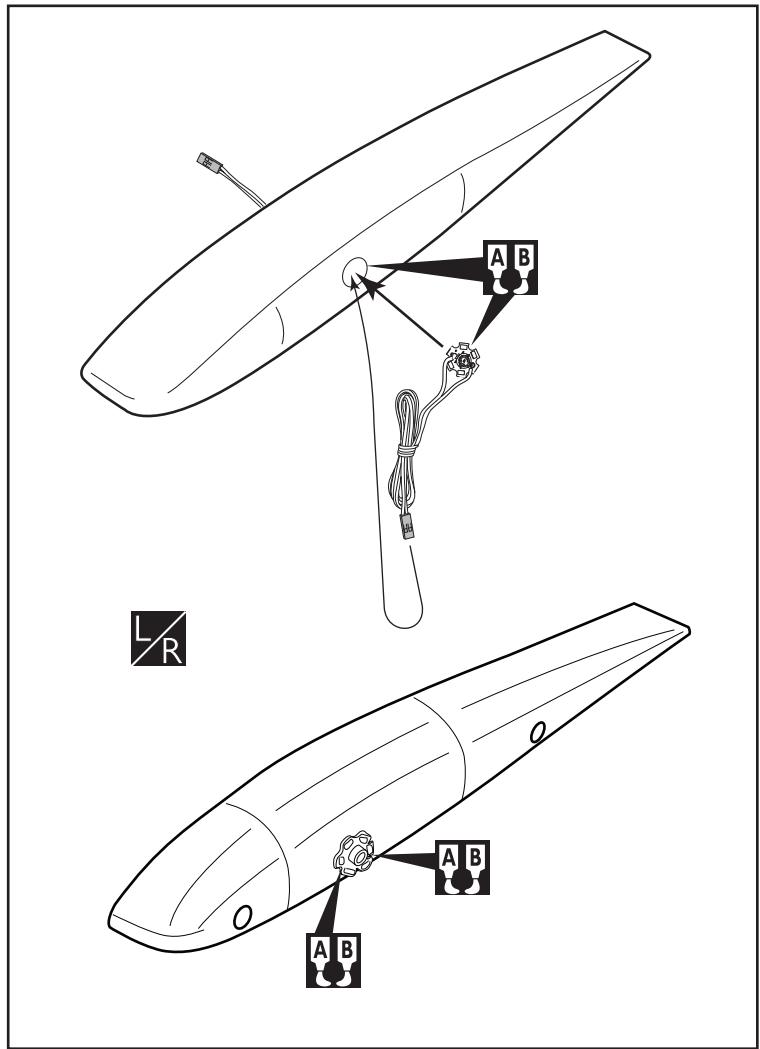

AB Apply epoxy glue.





L/R Assemble left and right sides the same way

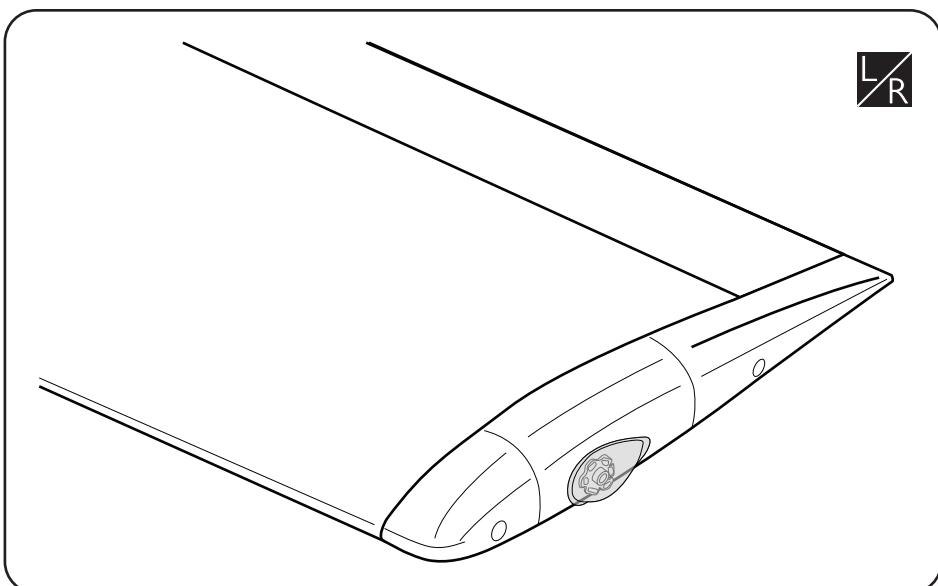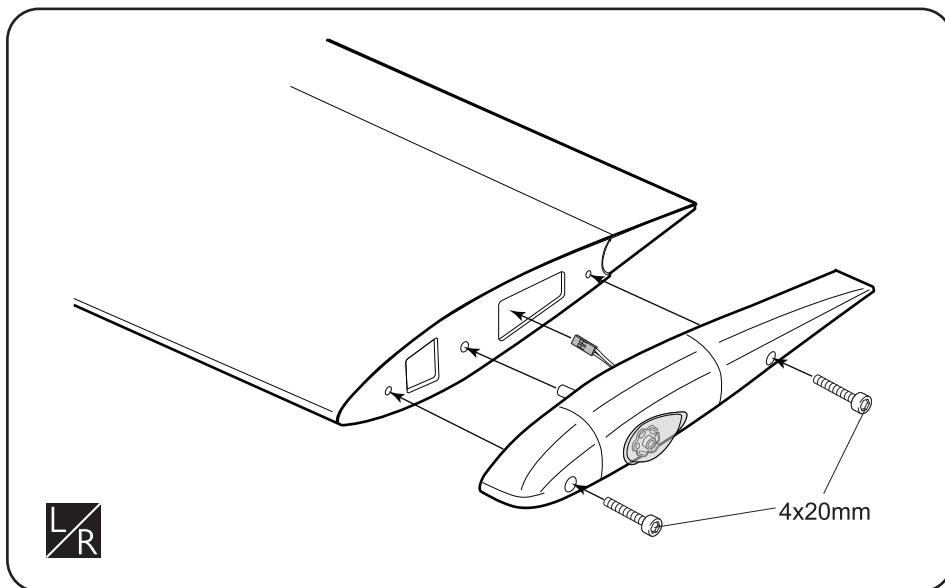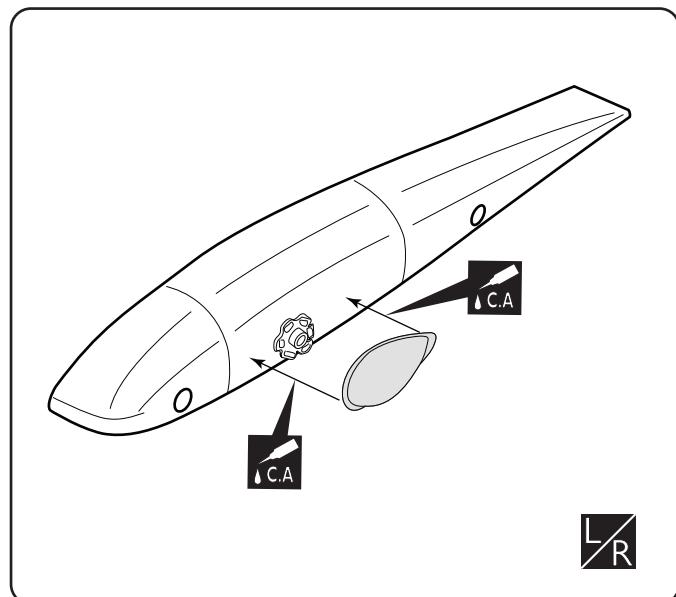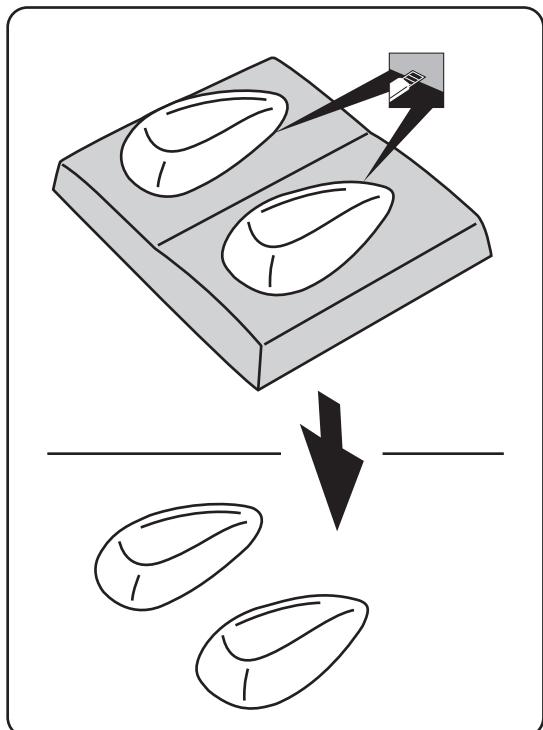


Cut off shaded portion

Apply instant glue
(CA glue, super glue).


Assemble left and right
sides the same way

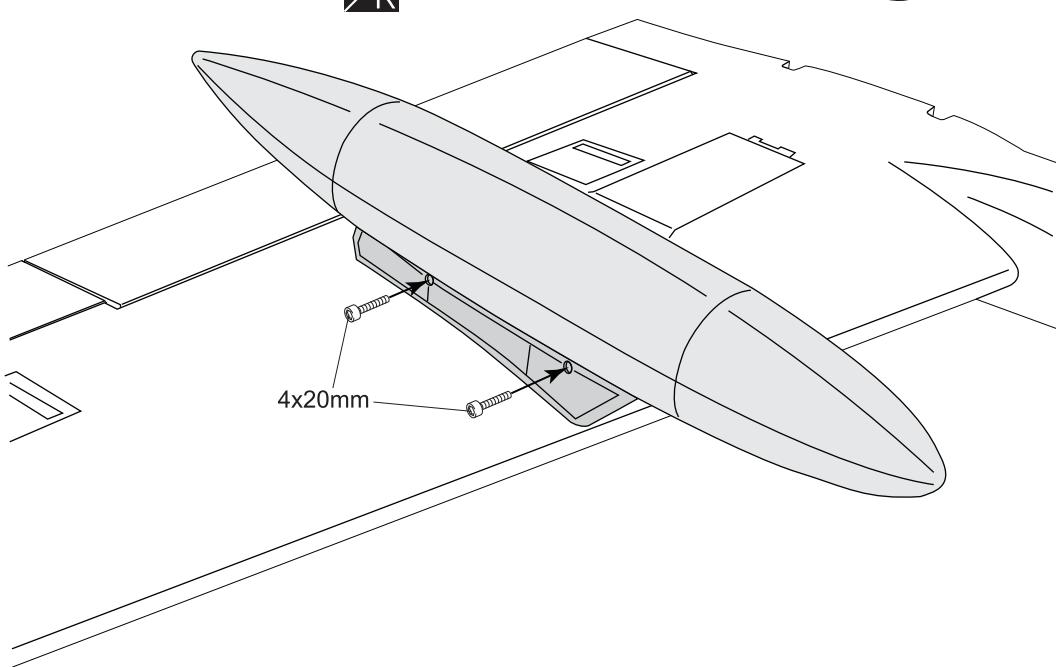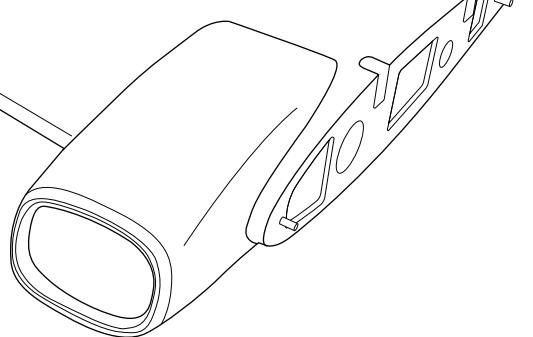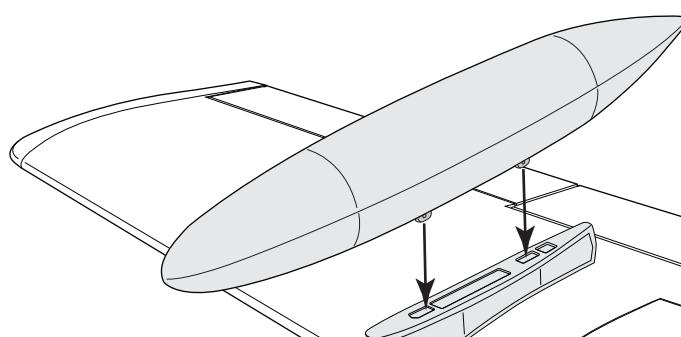
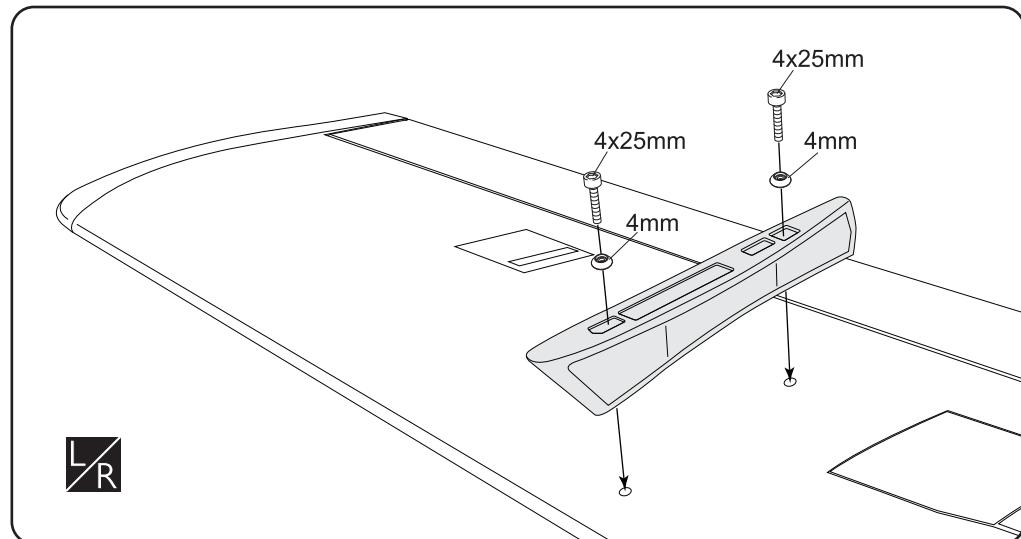



 Assemble left and right sides the same way

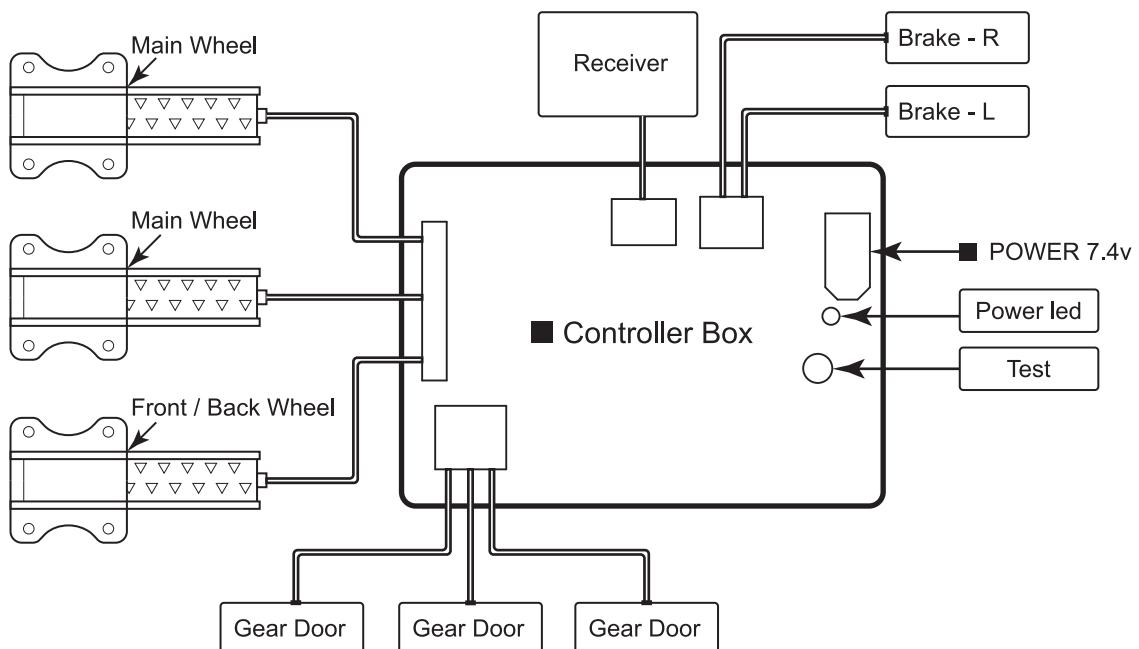ELECTRIC RETRACT SYSTEM**JOINING THE FUSELAGE**

4 x 20mm Cap Screw	6
4mm Washer	6

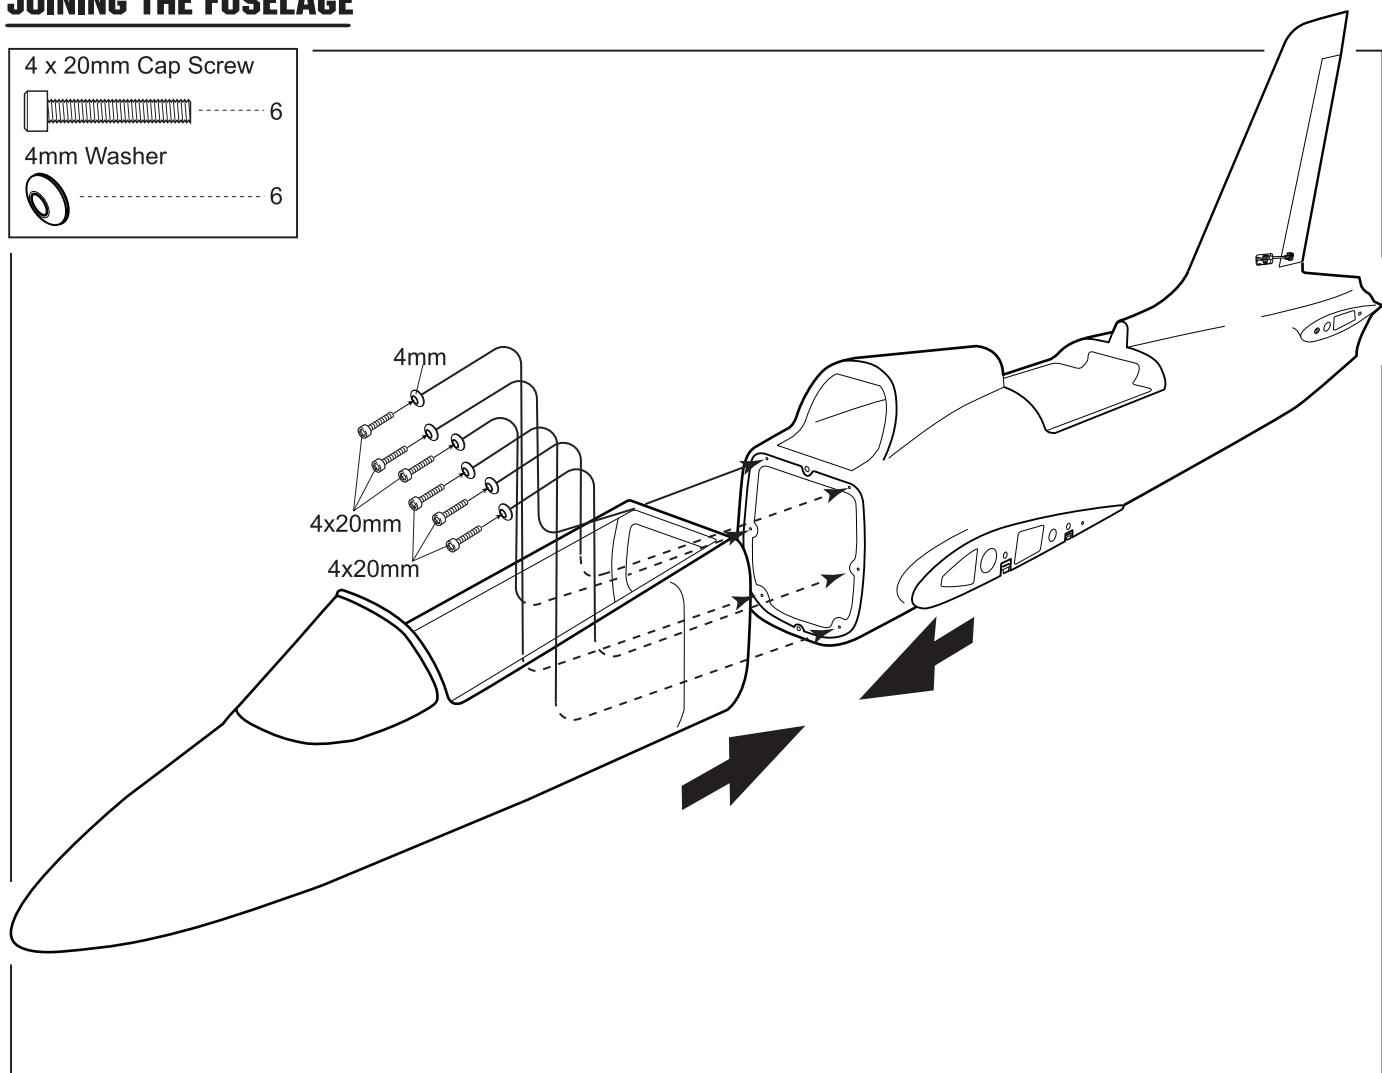


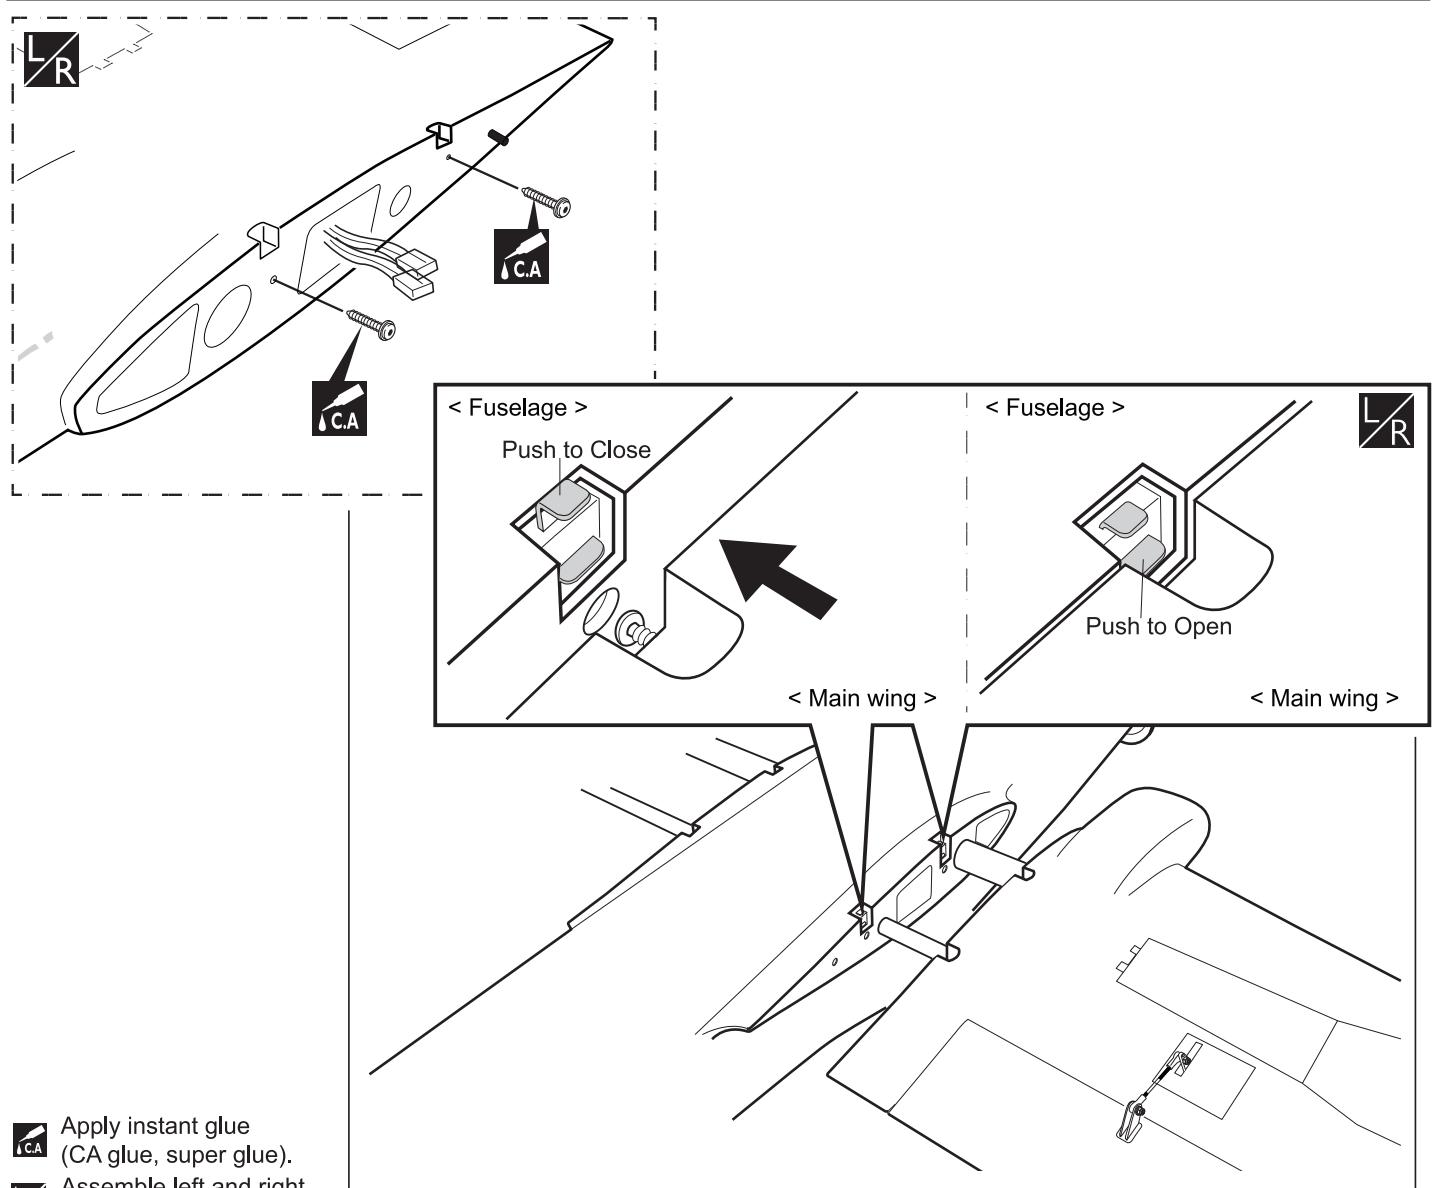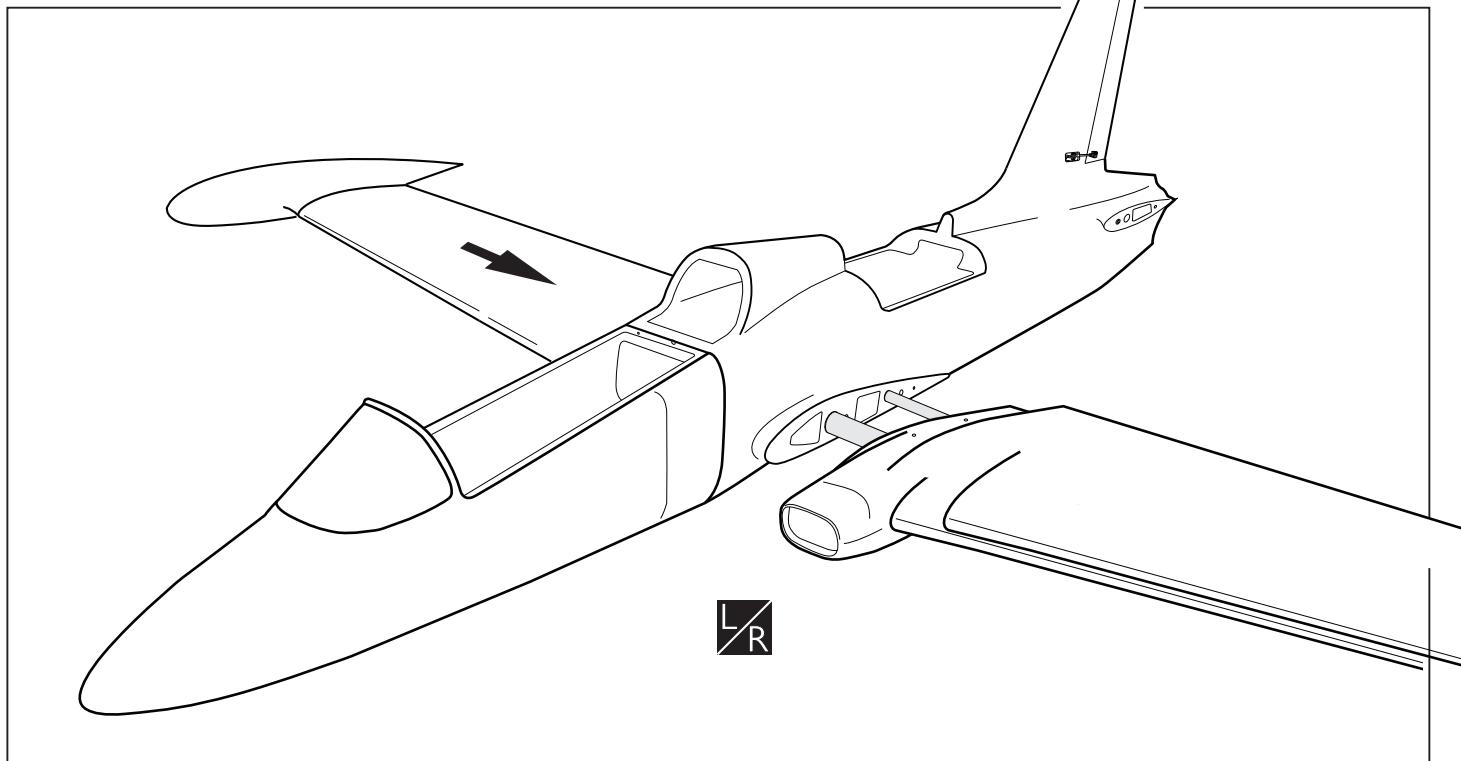SECURE THE WING TO THE FUSELAGE

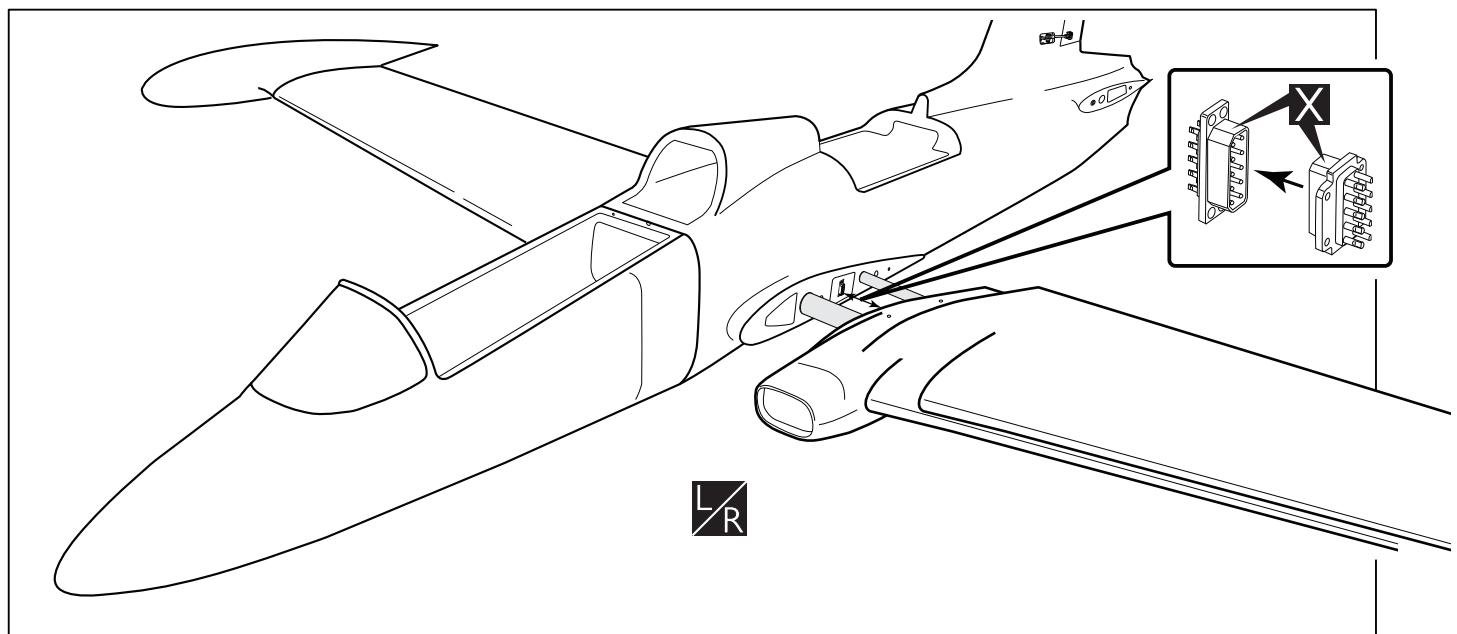


*** Multiplex Connection 10 Pin (Item: 18901)**
(Must Be Purchased Separately):


① < Aileron >

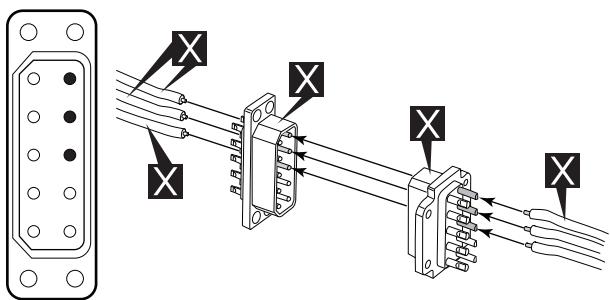


② < Flap >

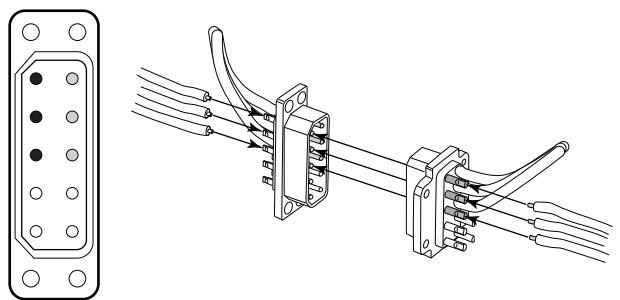

③ < Main Gear >

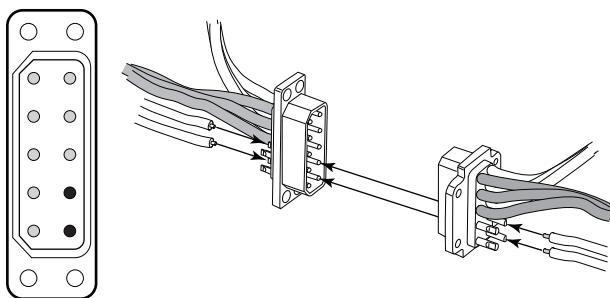








④ < Brakes >

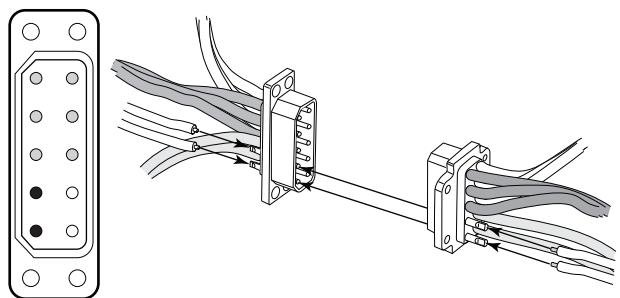





① → ② → ③ Assemble in the specified order.

X Must be purchased separately!

INSTALLING THE VERTICAL AND STABILIZER PUSHROD

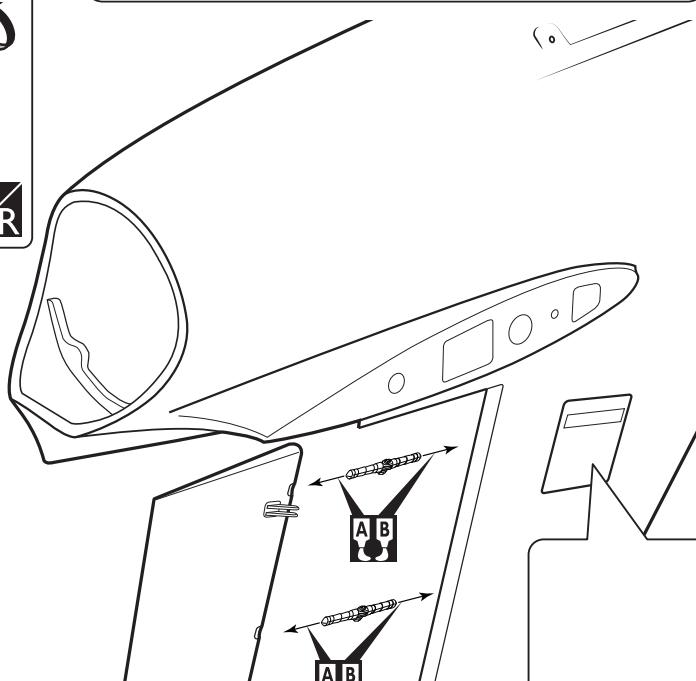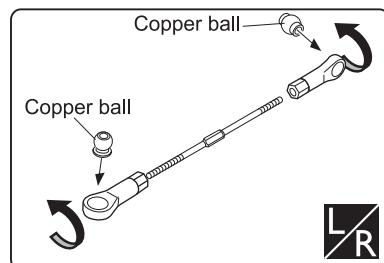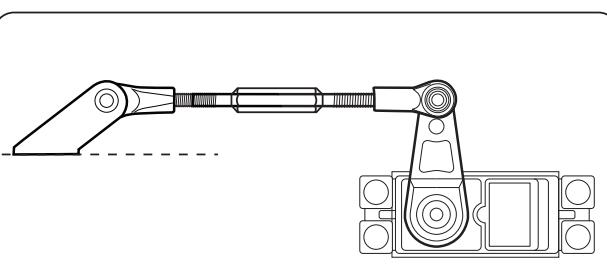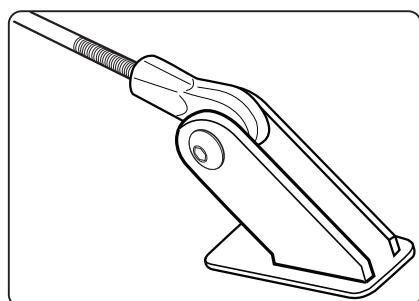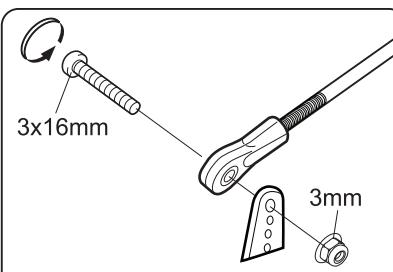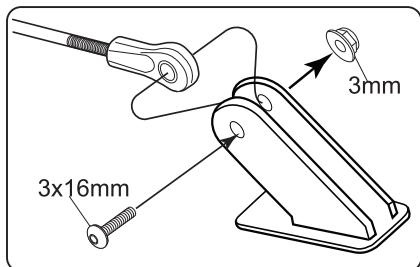

3 x 16mm Button Screw	2
2.6 x 10mm Button Screw	4
Copper ball servos	1
Copper ball control horn	1
3mm Nut	2
3 x 70mm Push rod	1

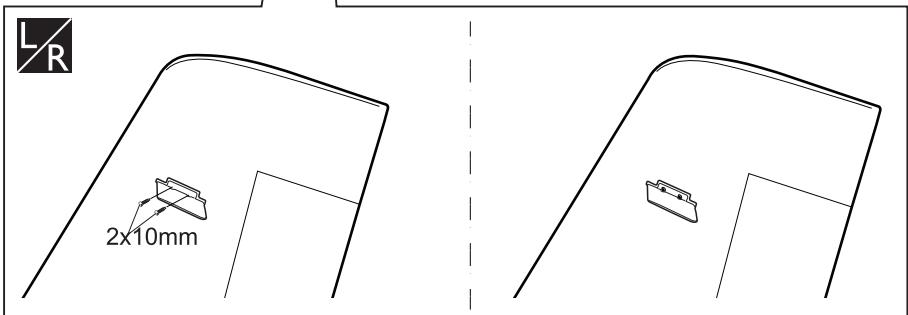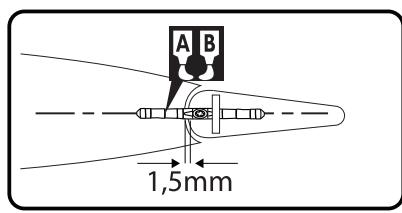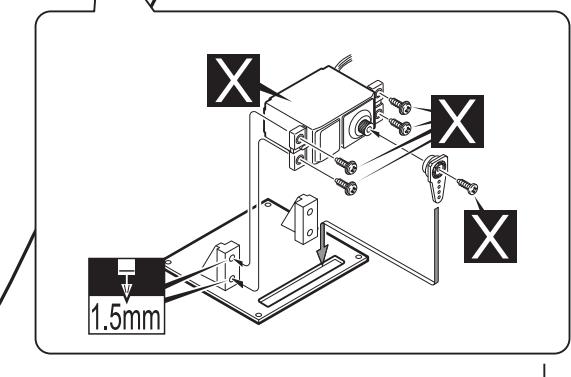
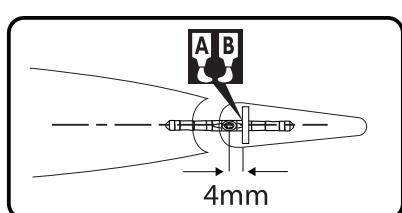


Drill holes with the Specified diameter.




Must be purchased separately!

Assemble left and right sides the same way

Apply epoxy glue

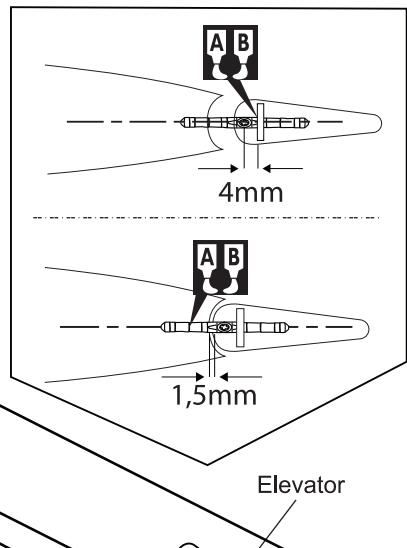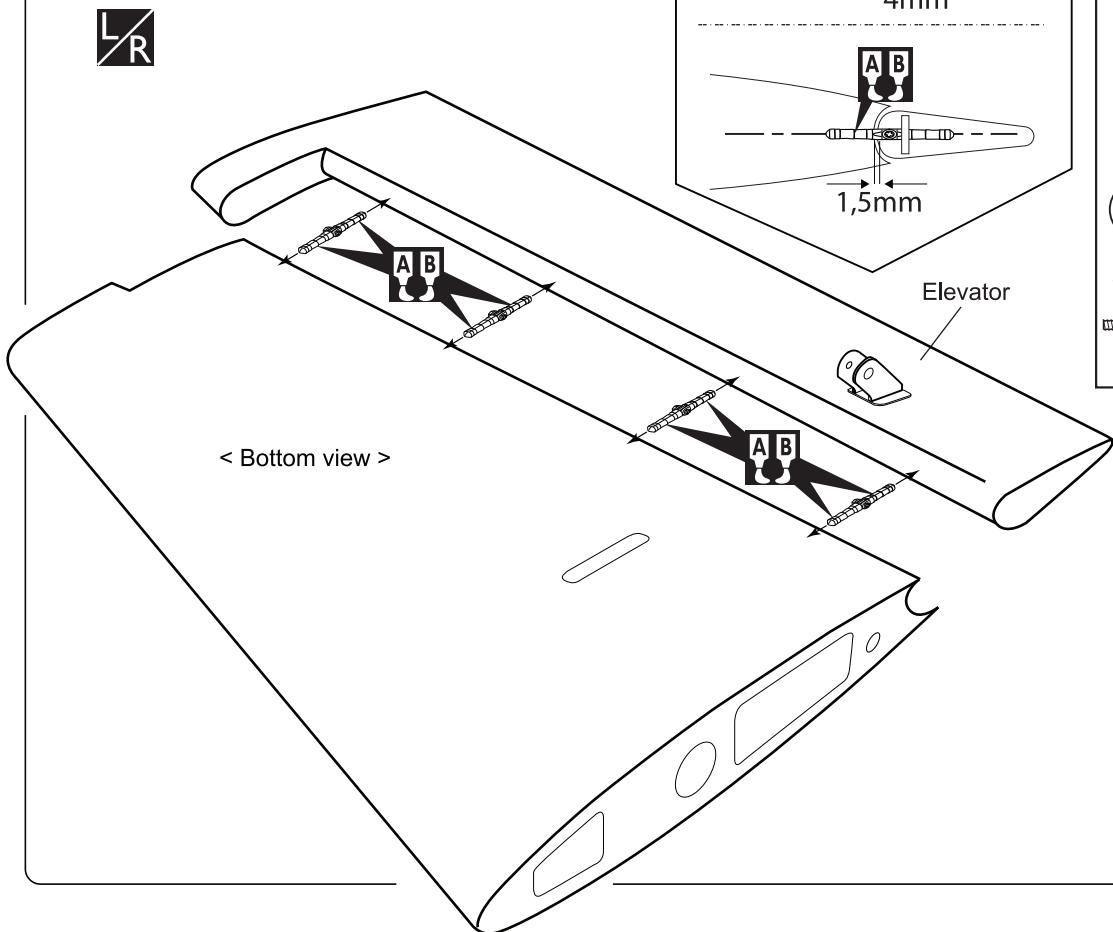INSTALLING THE ELEVATOR

3 x 16mm Button Screw	4
Copper ball servos	2
Copper ball control horn	2
3mm Nut	4
3 x 55mm Push rod	2

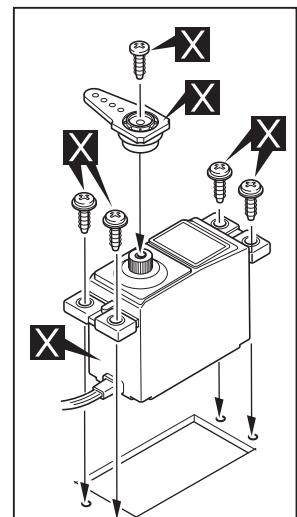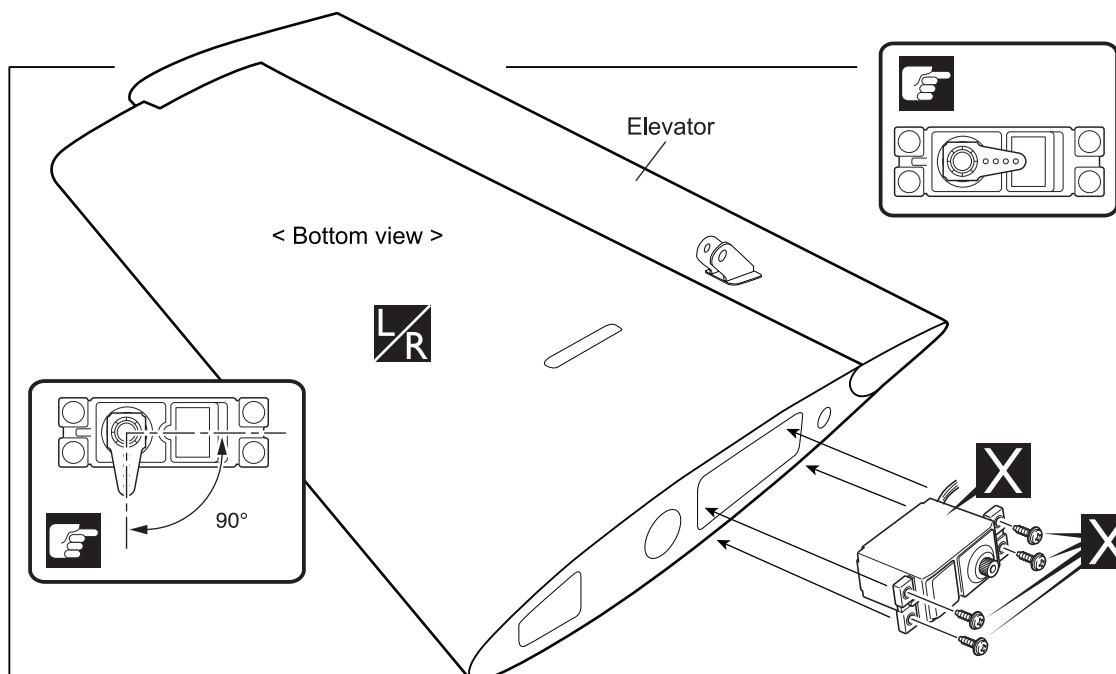INSTALLING THE ELEVATOR SERVOS


Apply epoxy glue

Assemble left and right sides the same way

Pay close attention here!

Must be purchased separately!



INSTALLING THE ELEVATOR PUSHROD

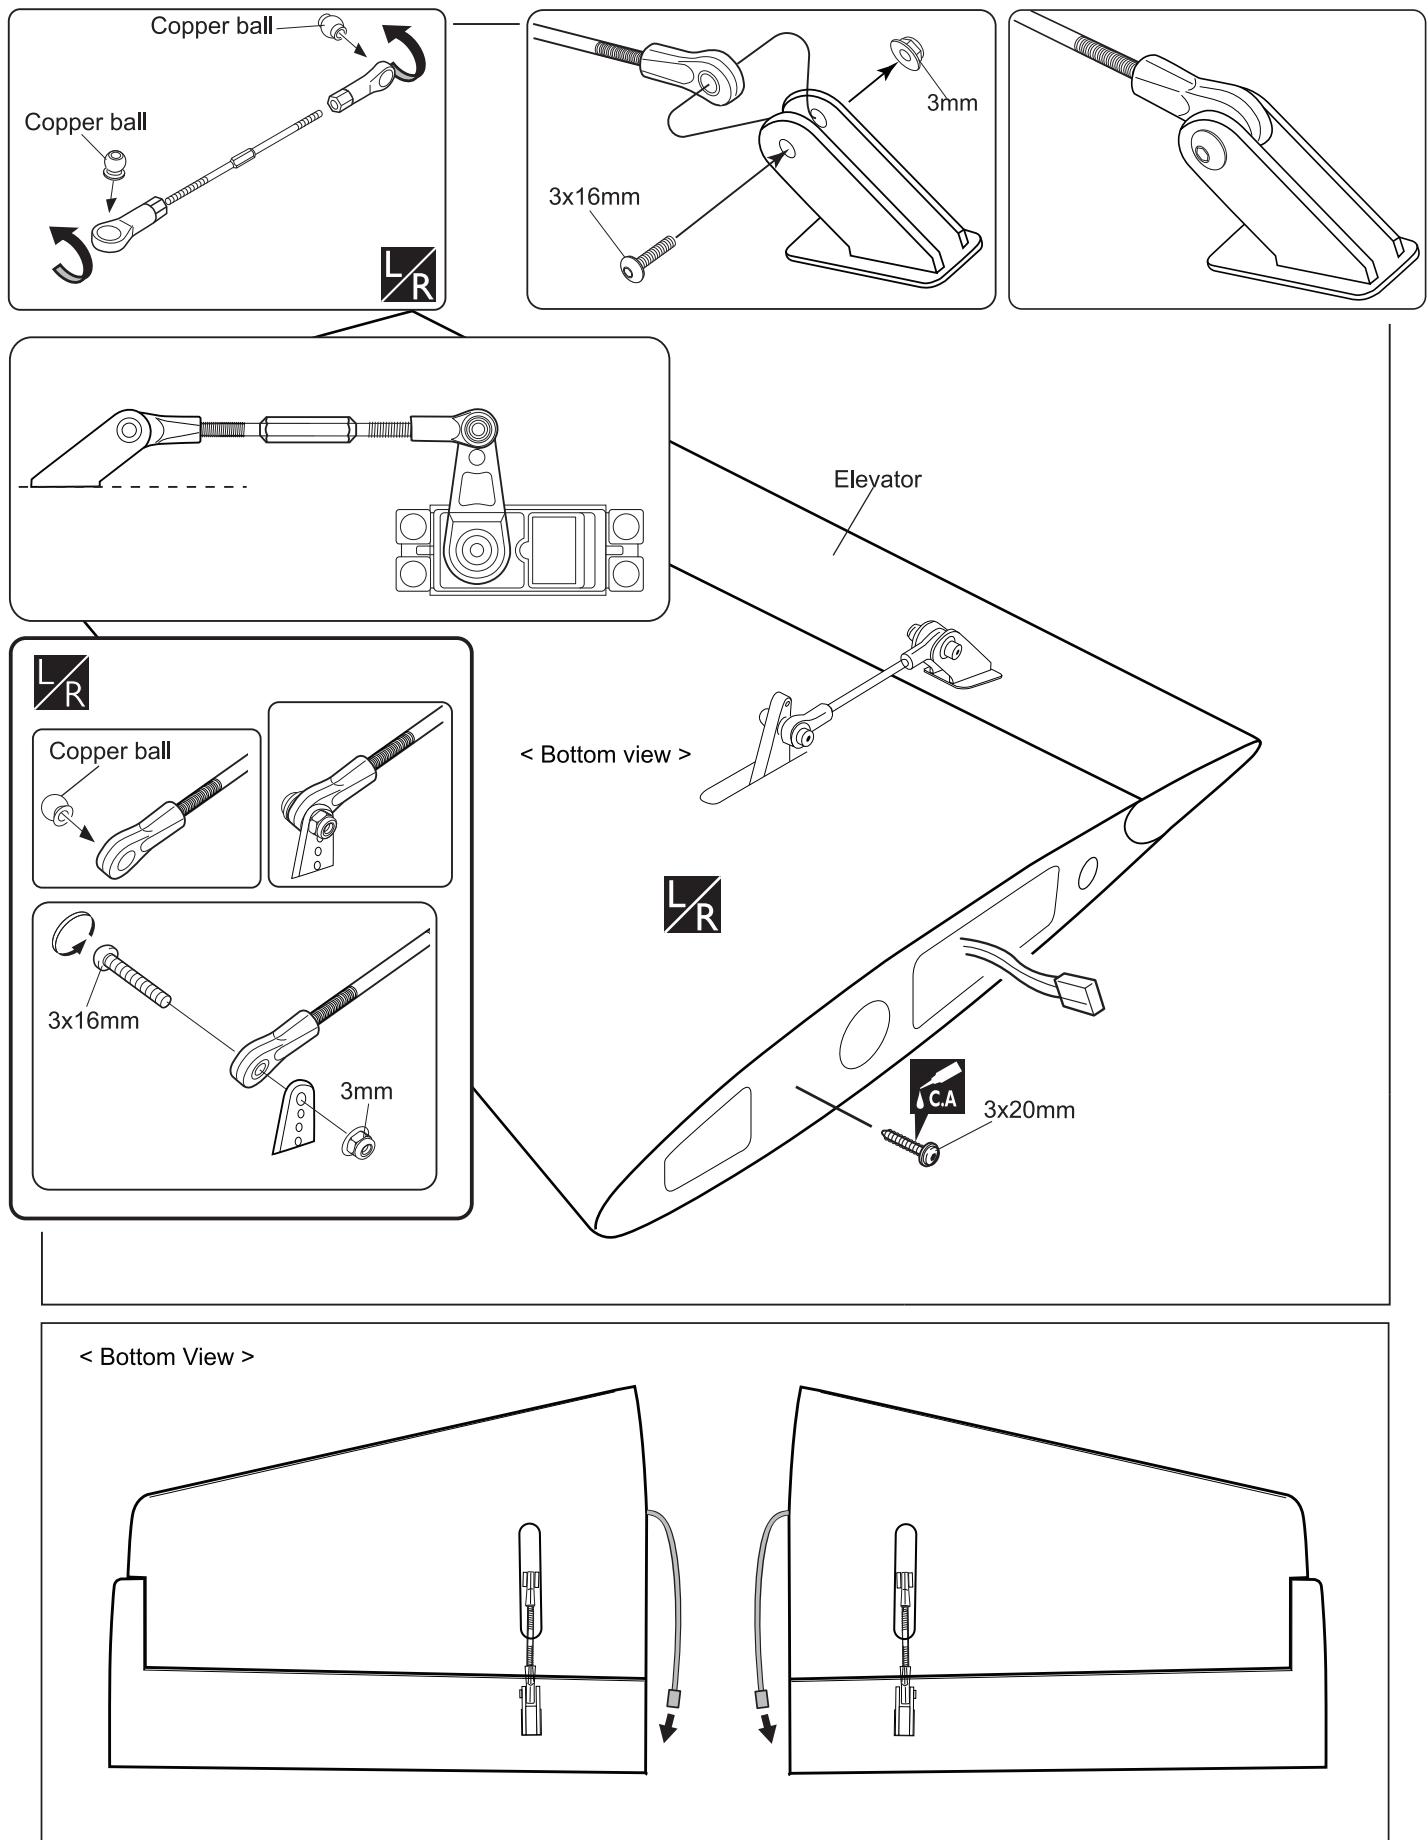

X Must be purchased separately!

C.A. Apply instant glue
(CA glue, super glue).


L/R Assemble left and right
sides the same way

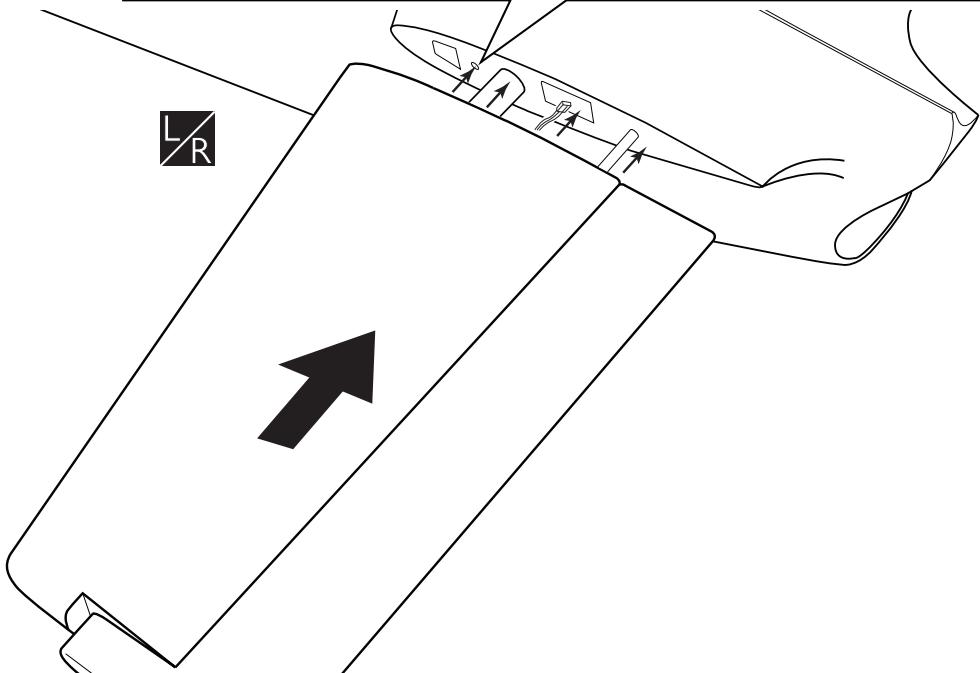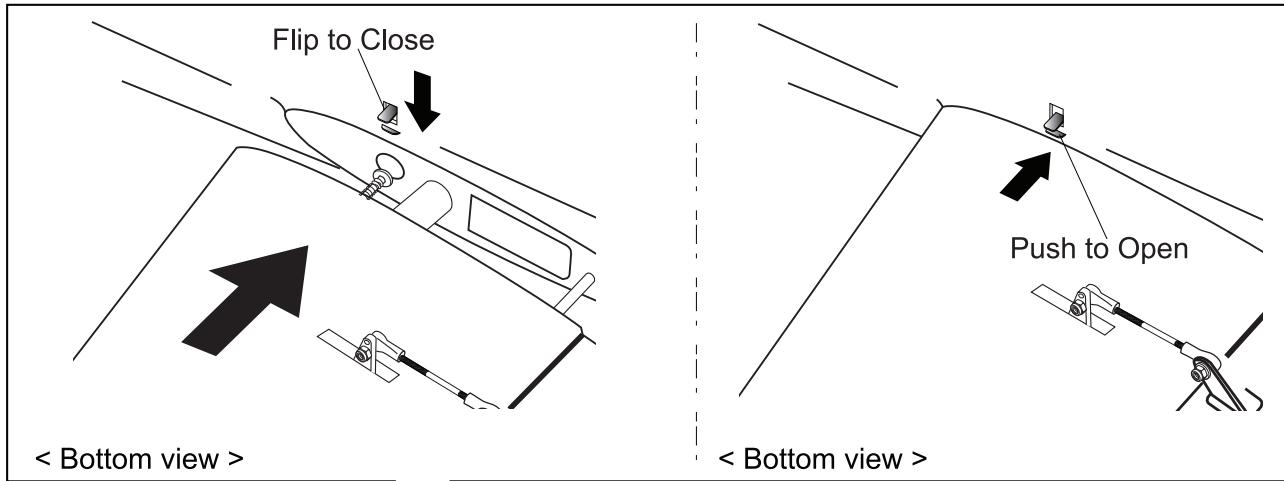

Assemble left and right sides the same way




INSTALLING THE SMALL FIN

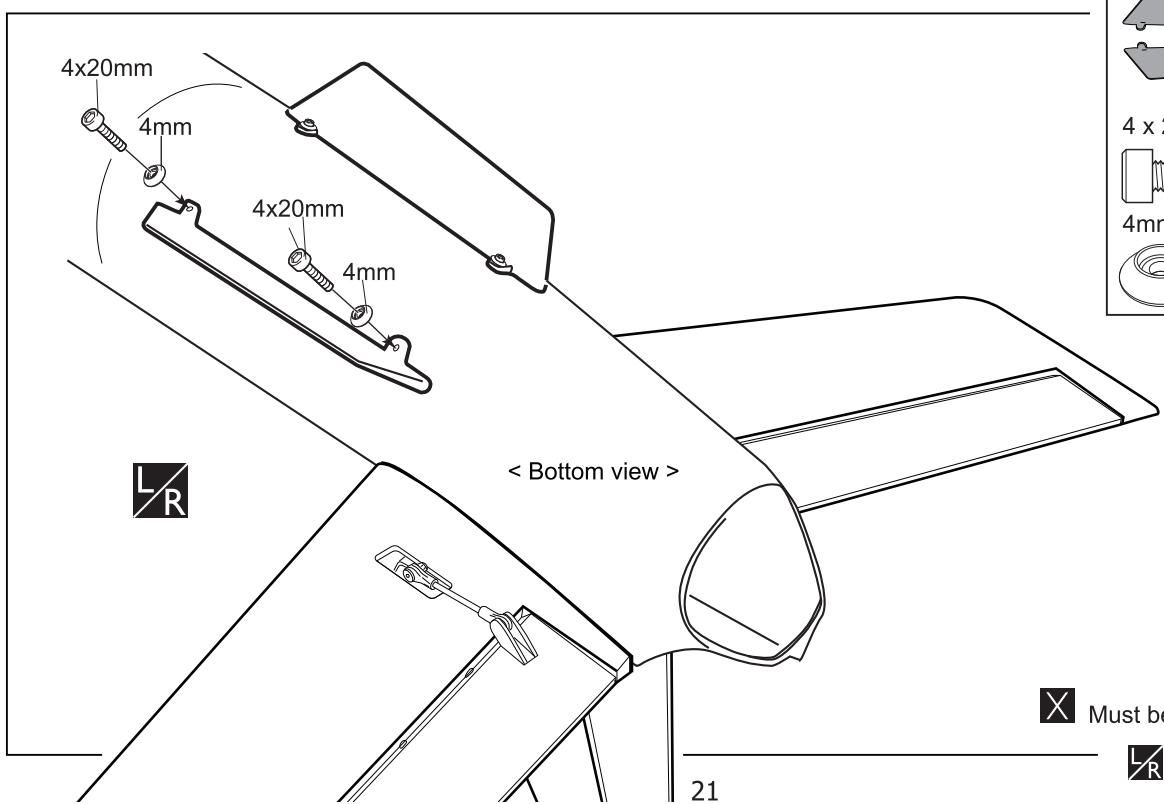

Small White Fin L/R	
	1
4 x 20mm Cap Screw	
4mm Washer	4



Must be purchased separately!


Assemble left and right sides the same way

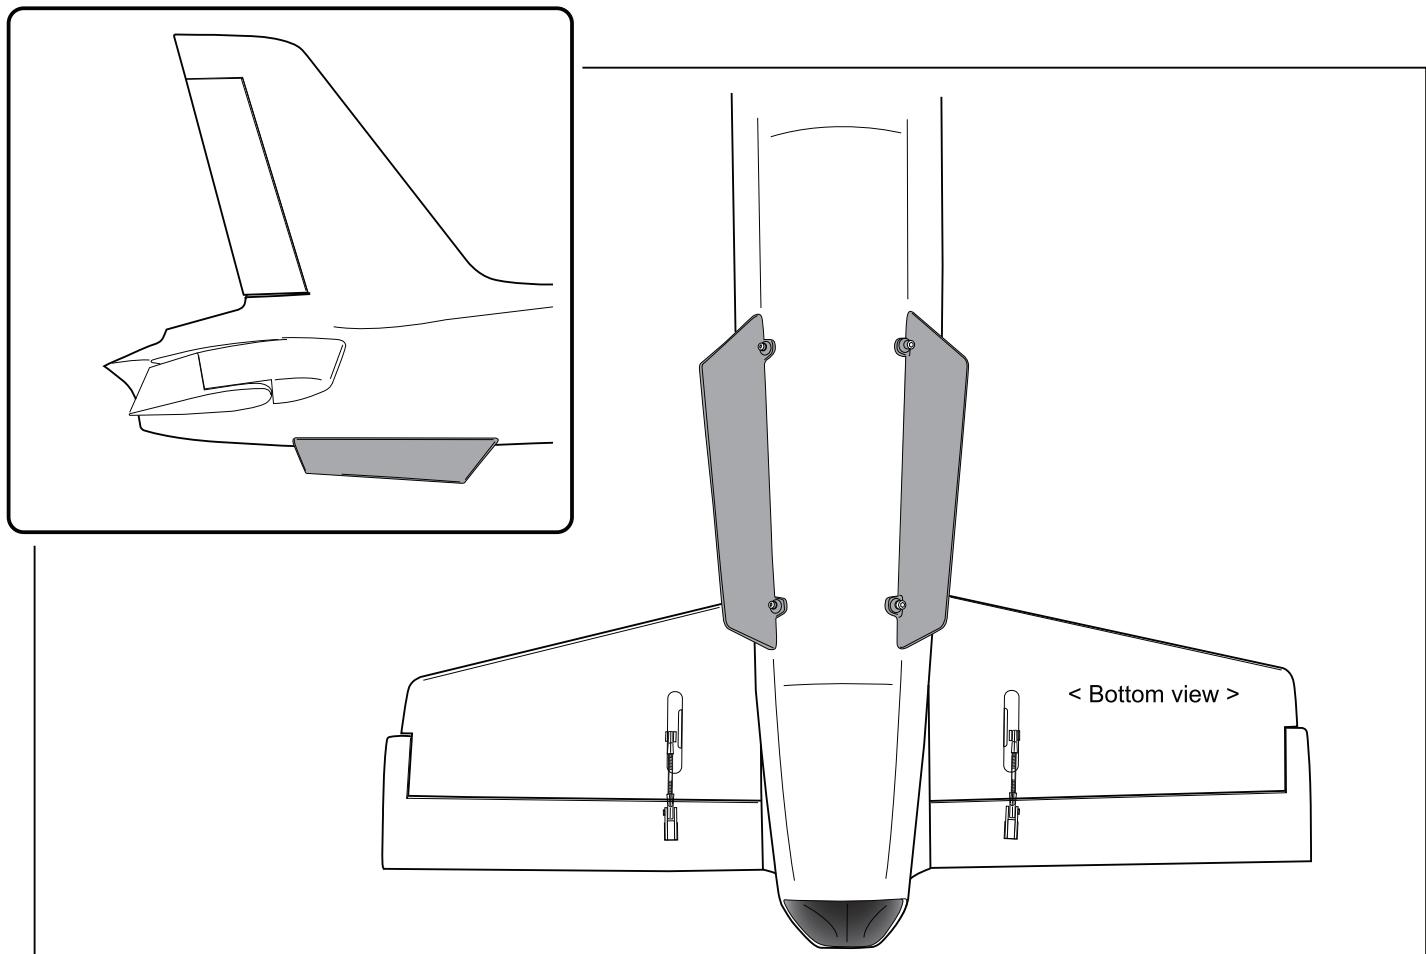

INSTALLING THE NAVIGATION GEAR LIGHT




*** GEAR LIGHT NOT INCLUDED (MUST BE PURCHASE SEPARATELY):**

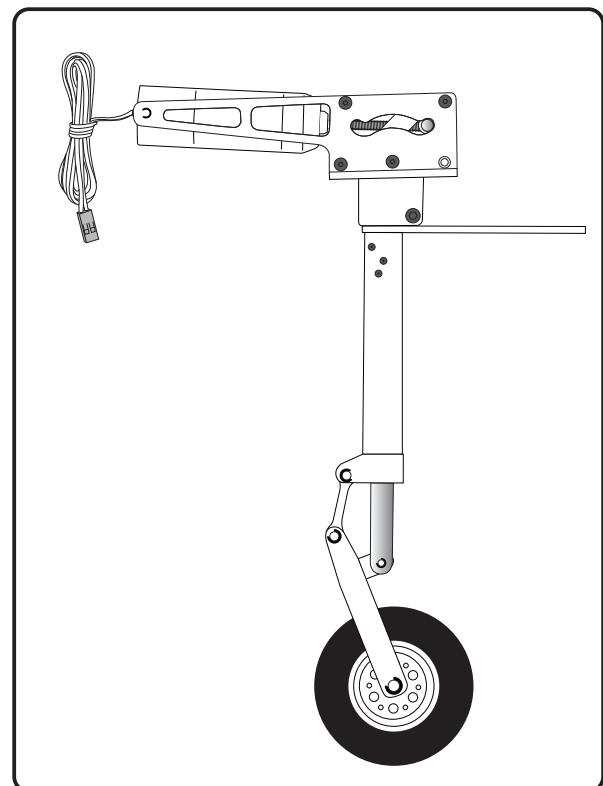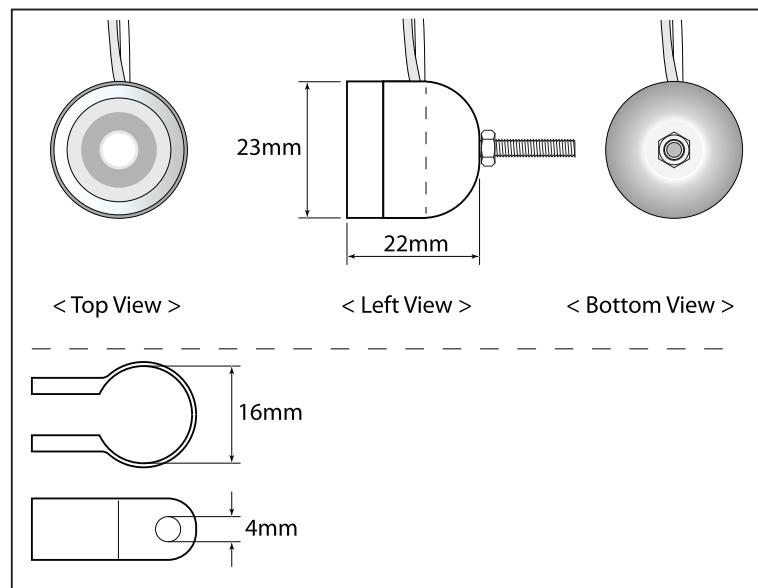

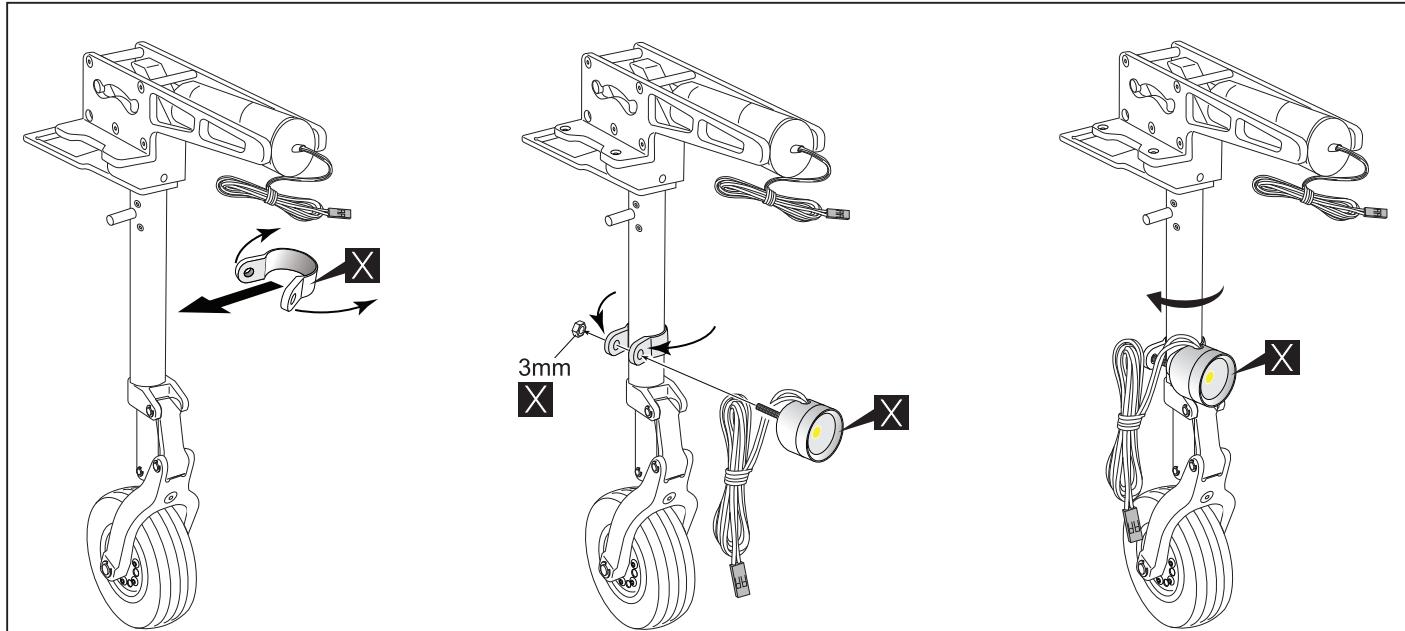

3 x 12mm Button Screw	2
3mm Nylon Nut	2
3mm Washer	8
3mm	12








Copper ball	2
Copper ball	2
3 x 60mm Push rod	1

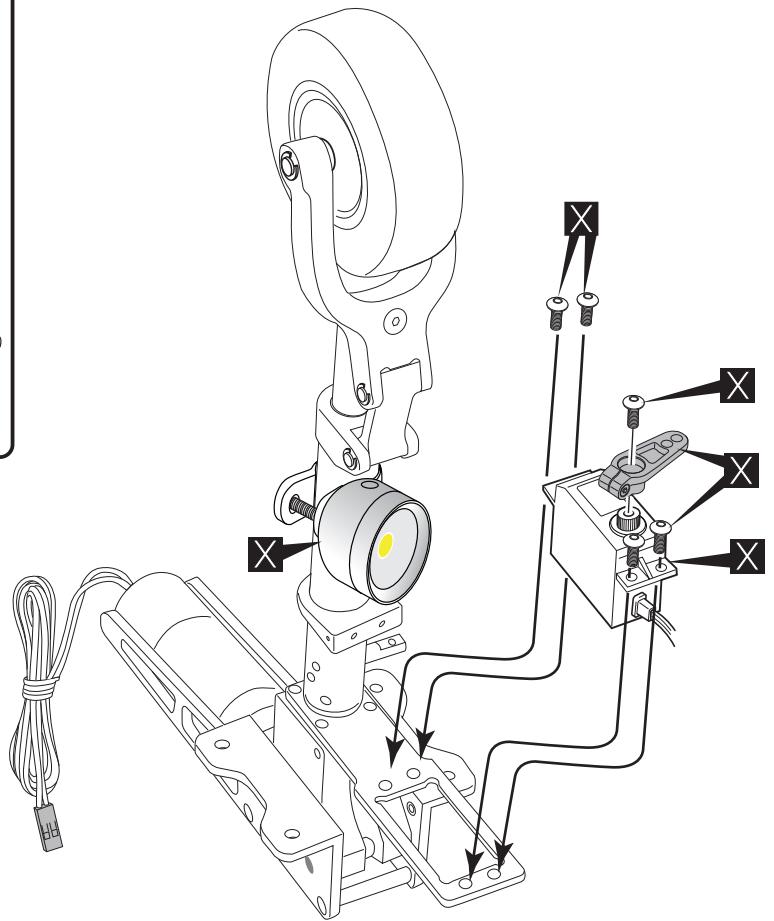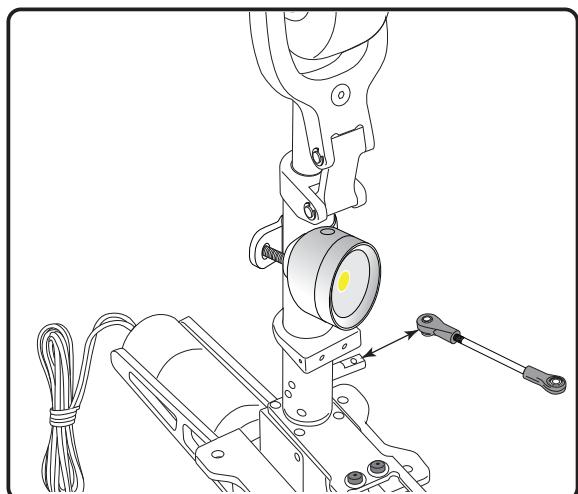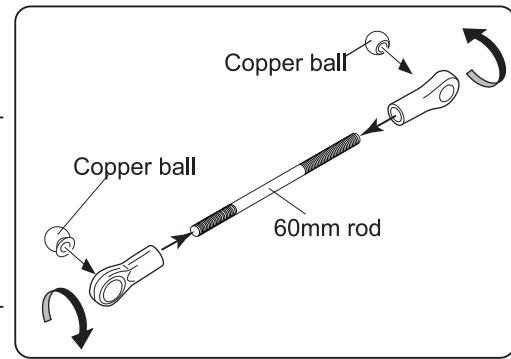


Must be purchased separately!

INSTALLING THE NOSE GEAR RETRACT

4 x 30mm Cap Screw	4
4mm Washer	5

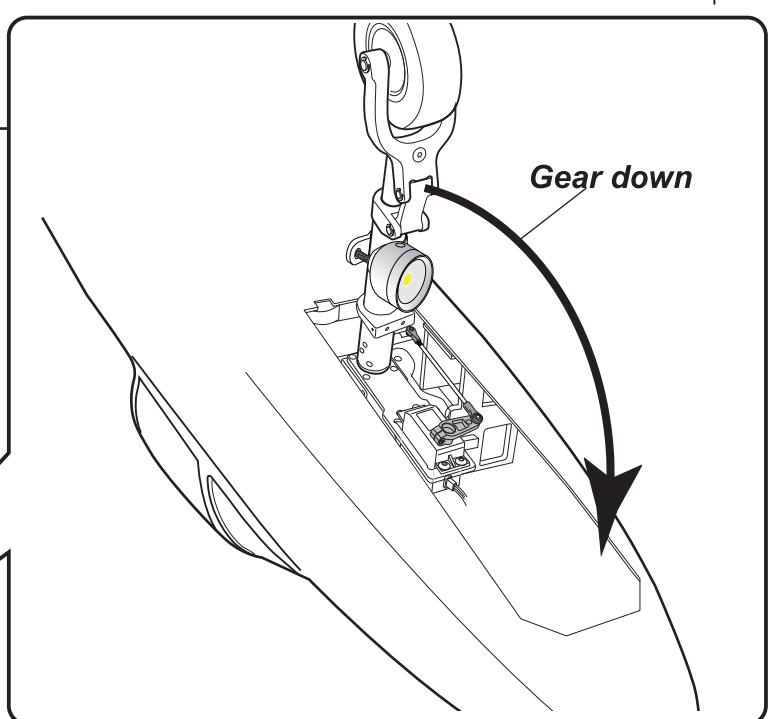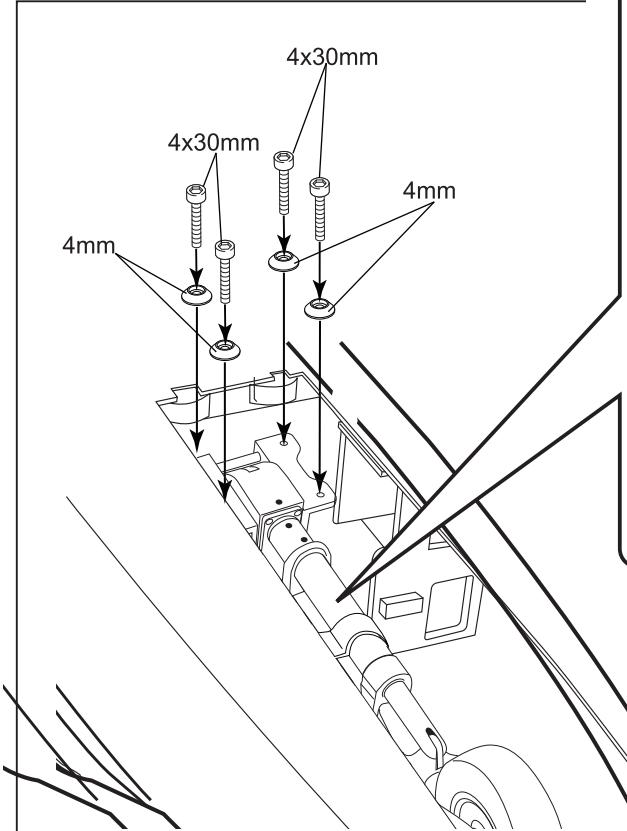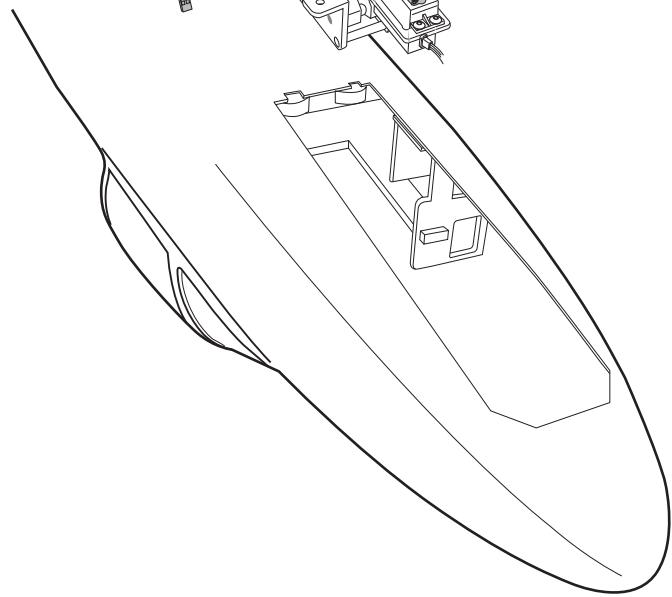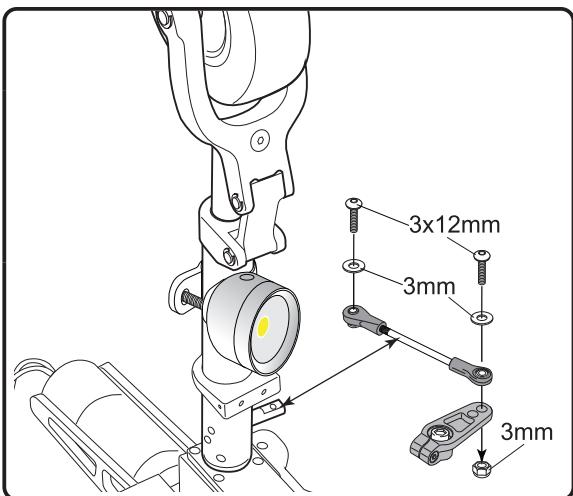

Gear down

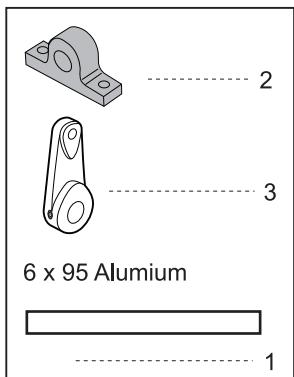NOSE DOOR INSTALLING

Plastic Pin Hinges M (#3)

4 x 15mm Cap Screw

1

Plastic Hinges (#8)

7

3 x 12mm Button Screw

2

3 x 8mm Button Screw

2

2 x 12mm Cap Screw

12

2mm Nut

12

3mm Washer

14

Copper ball

6

6





1

3 x 80mm Push rod

2

3 x 80mm Push rod

1

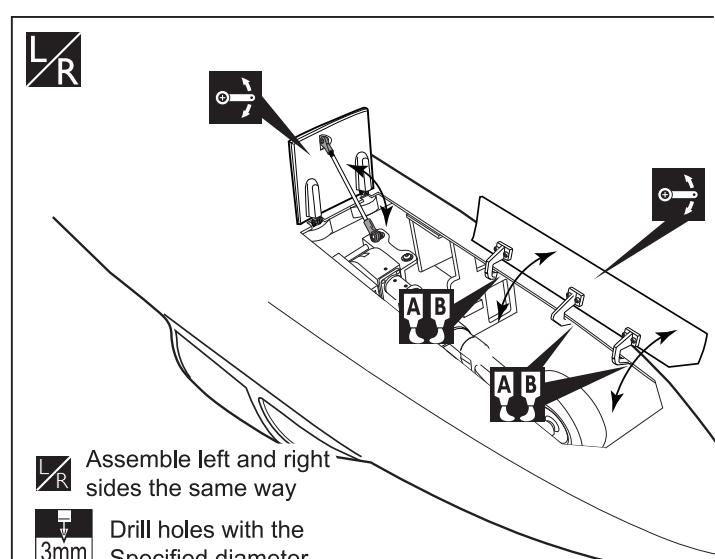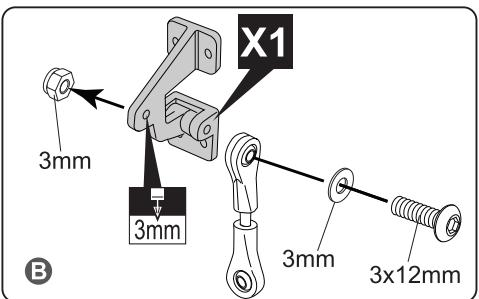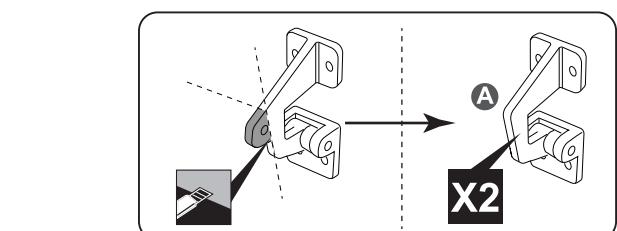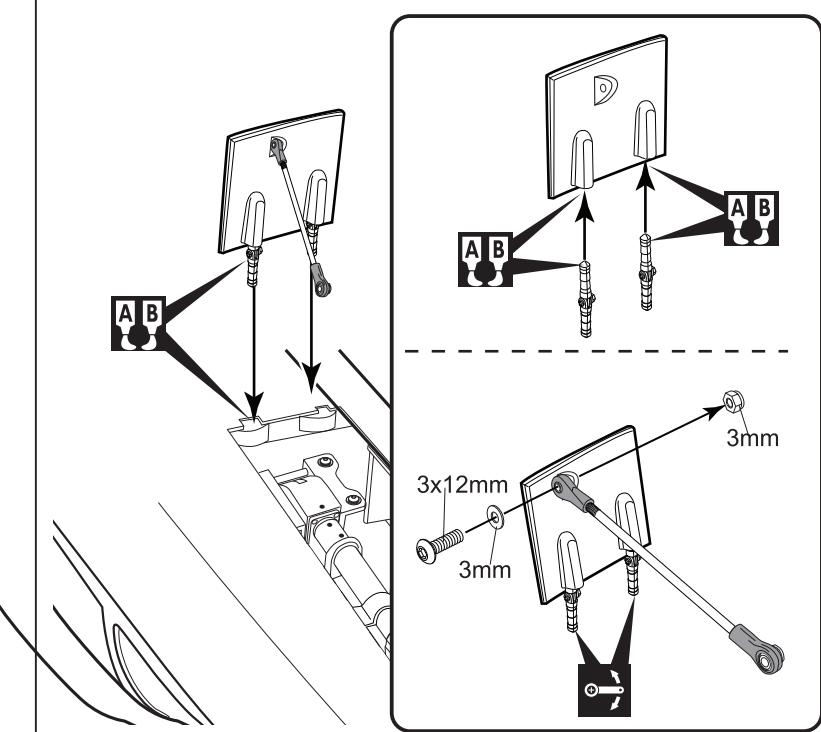



Assemble left and right sides the same way


Drill holes with the Specified diameter.
3mm

Apply epoxy glue.

Cut off shaded portion

Ensure smooth, non-binding movement when assembling.

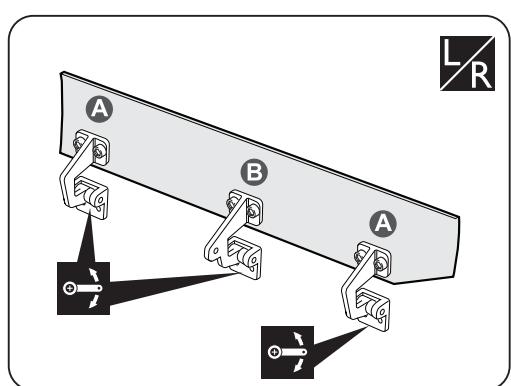
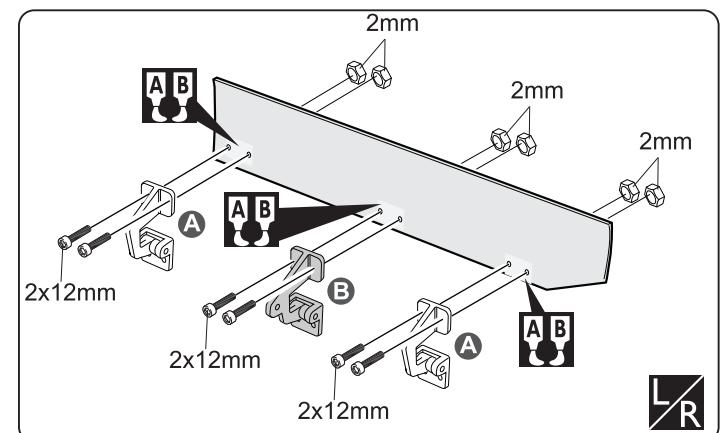


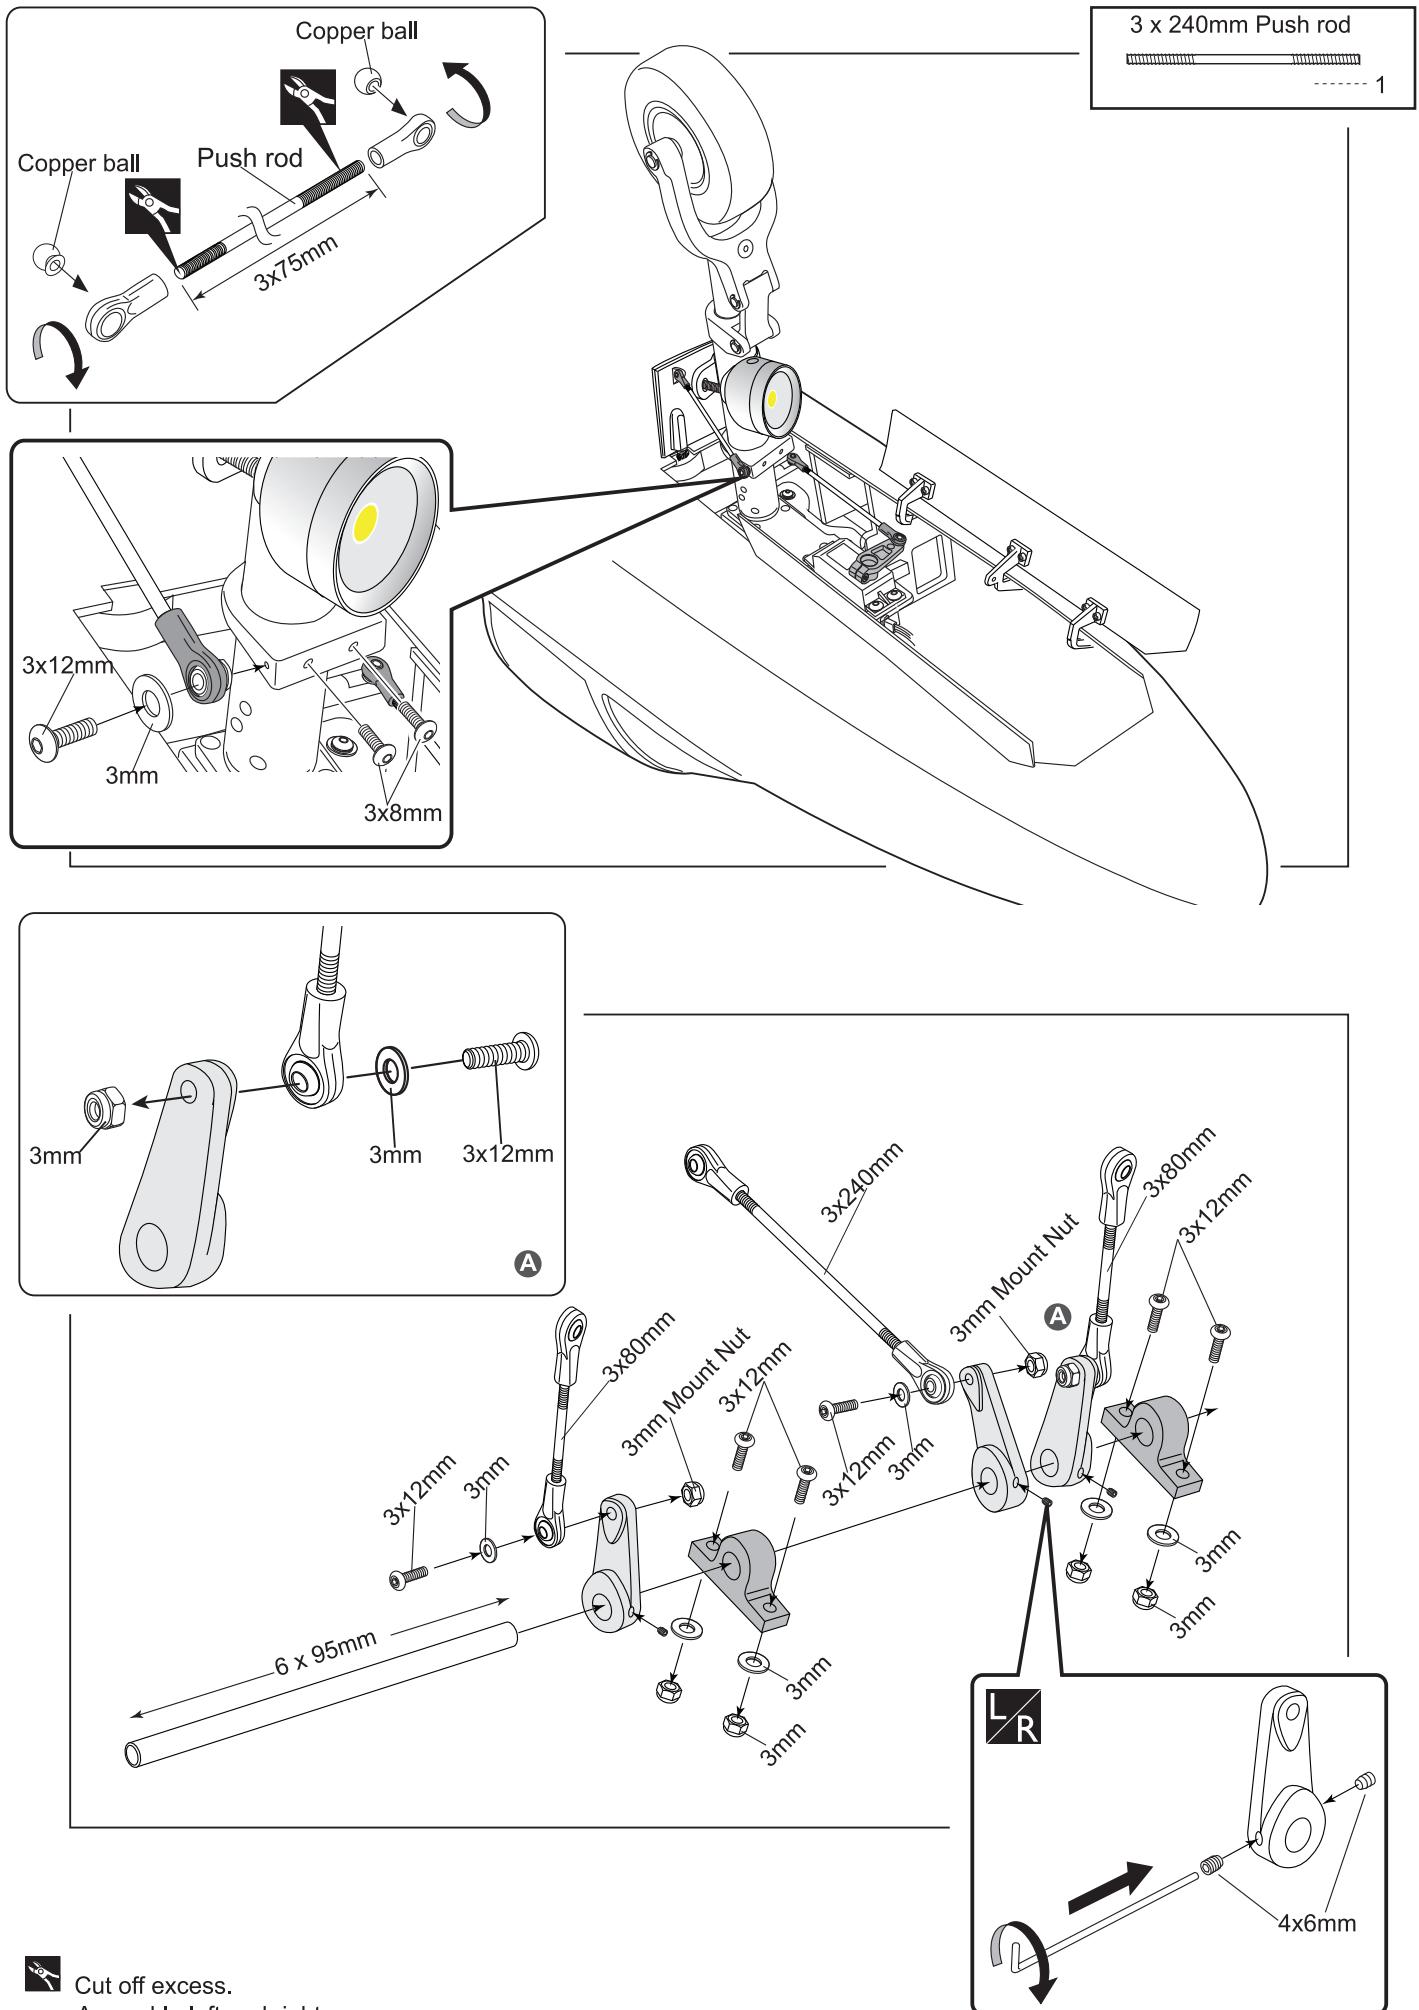

Cut off excess.




Assemble left and right sides the same way

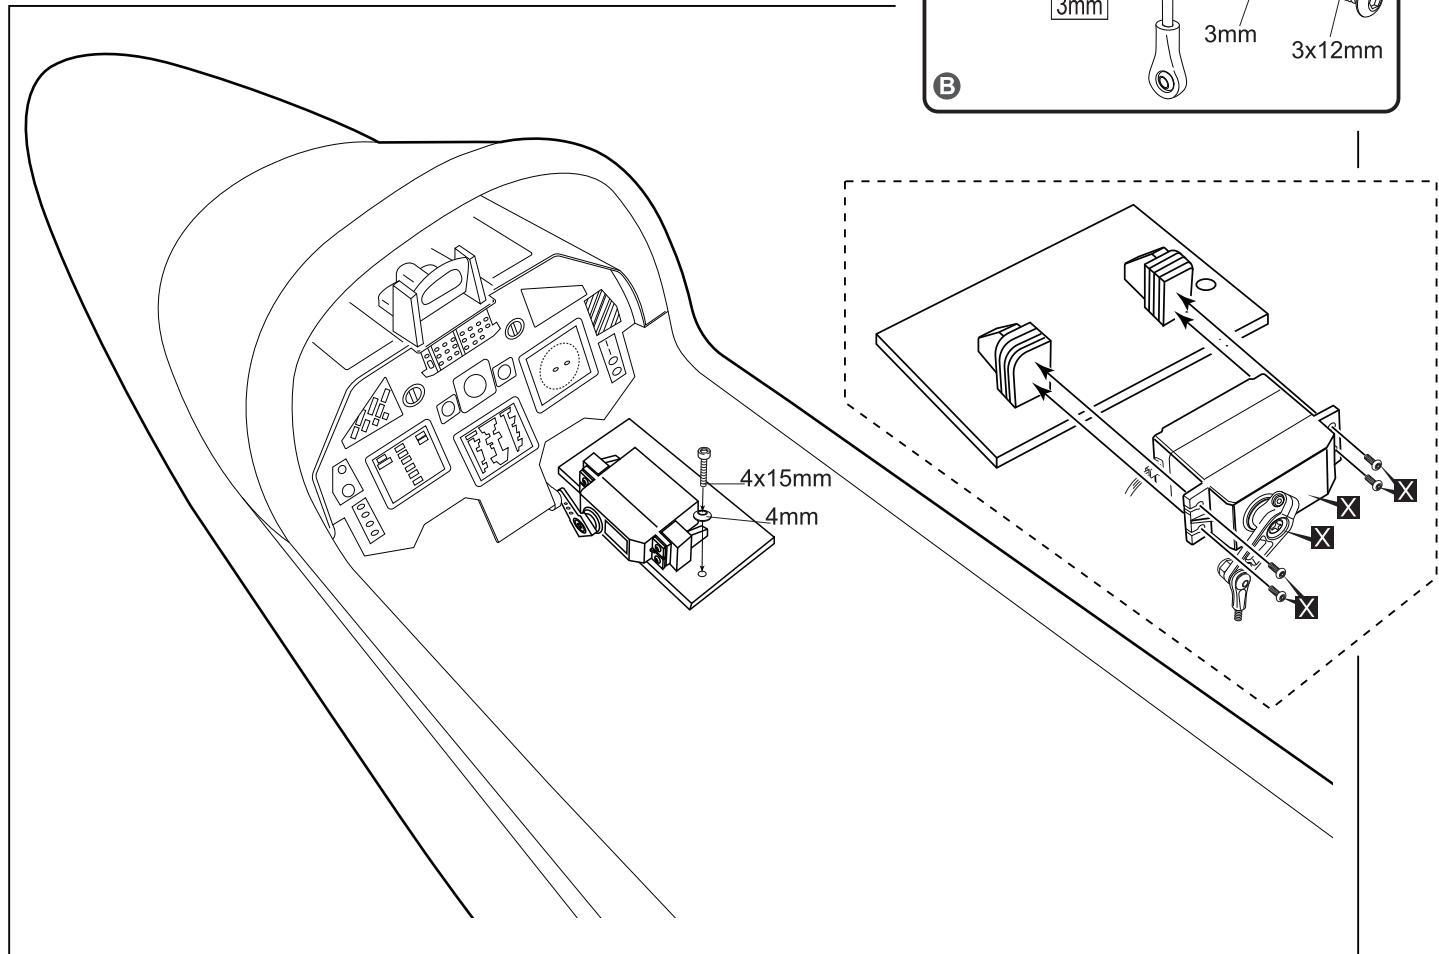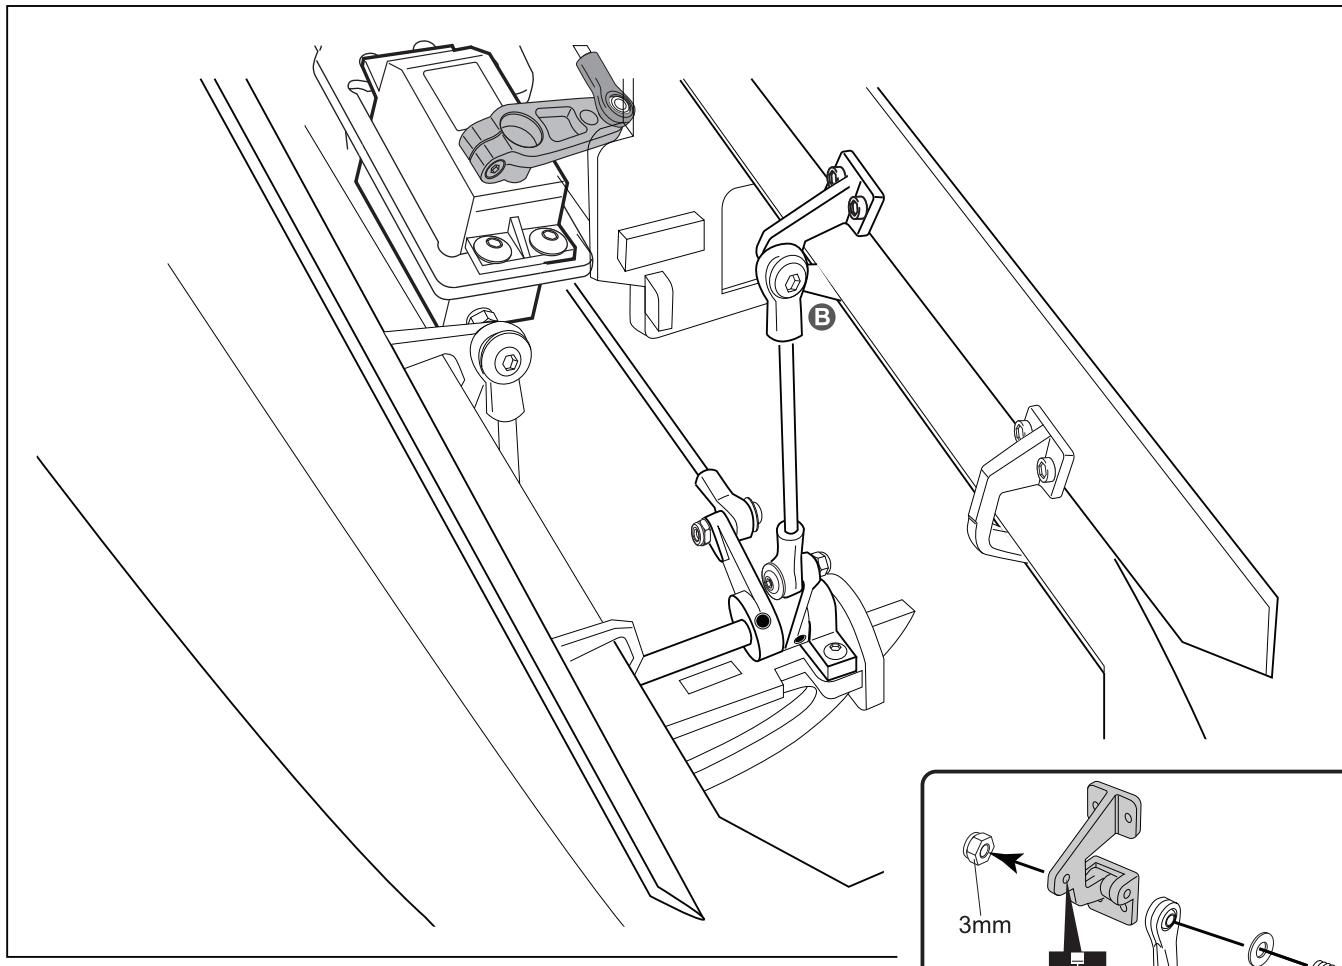


Drill holes with the specified diameter.

 Must be purchased separately!



INSTALLING THE ENGINE

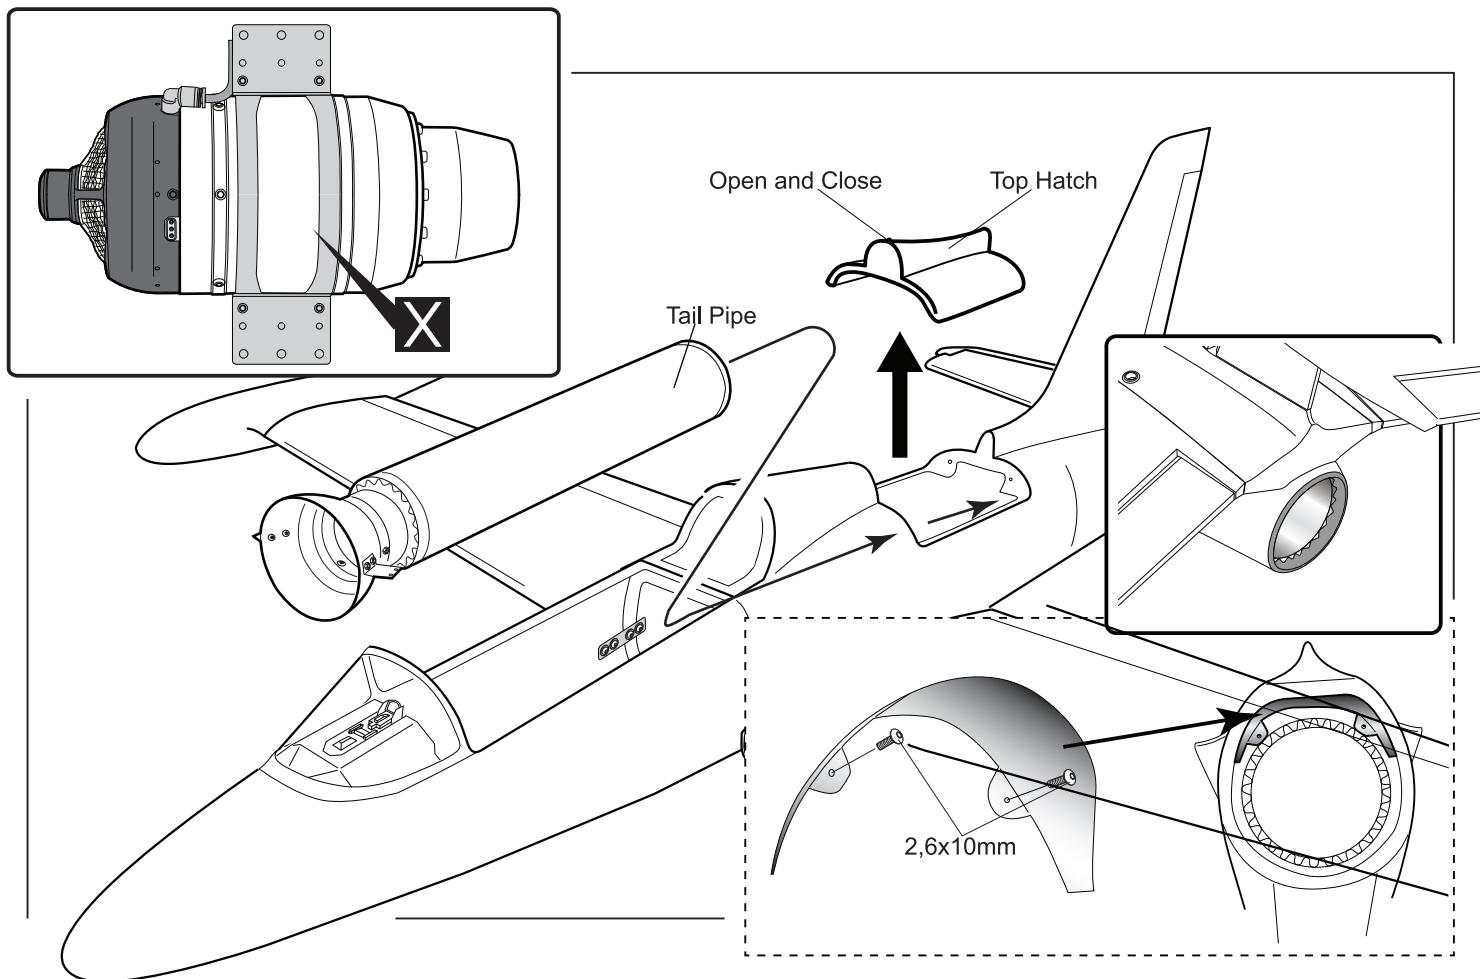

INSTALLING THE FUEL TANK


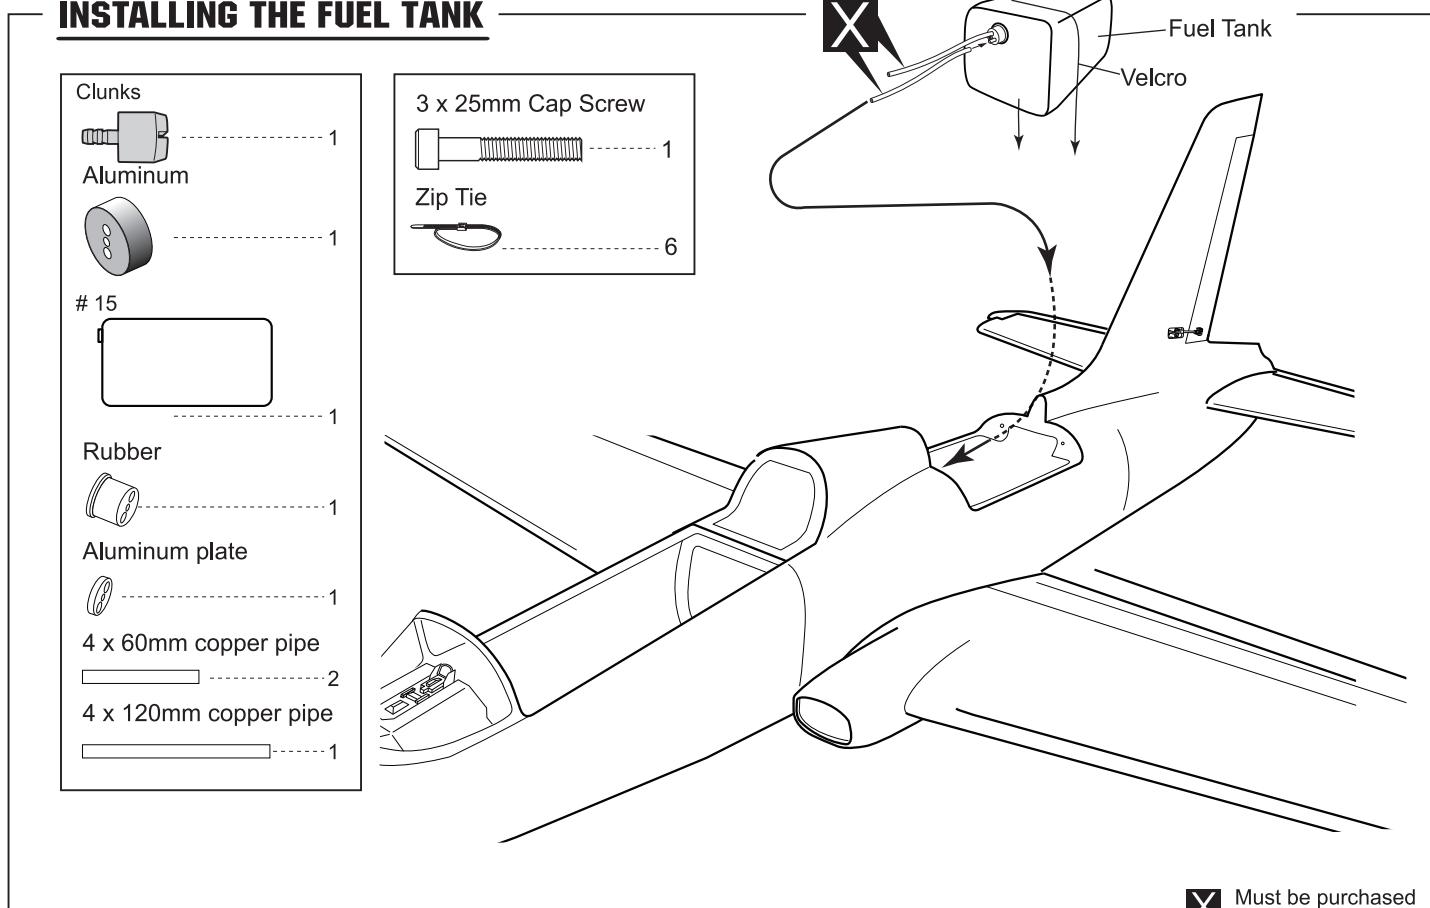


Must be purchased separately!

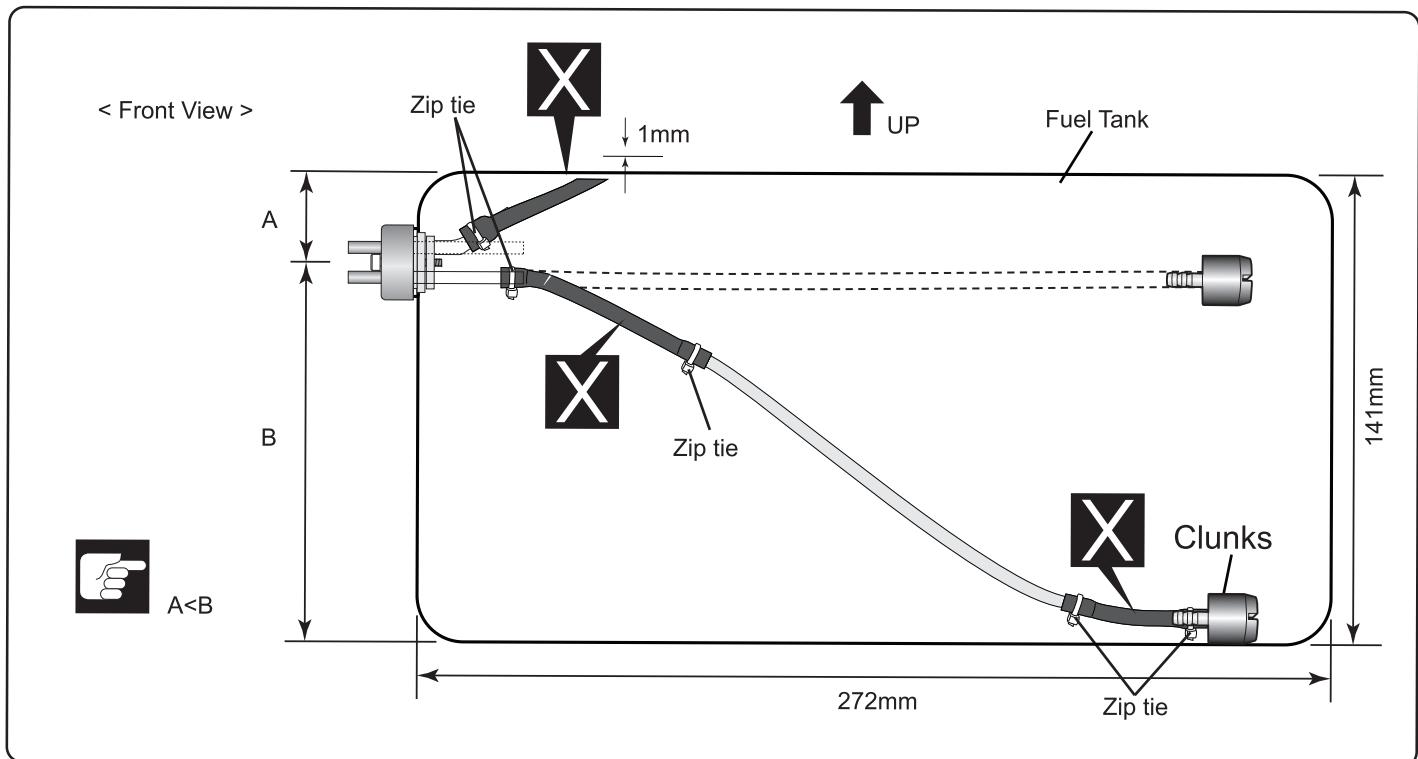
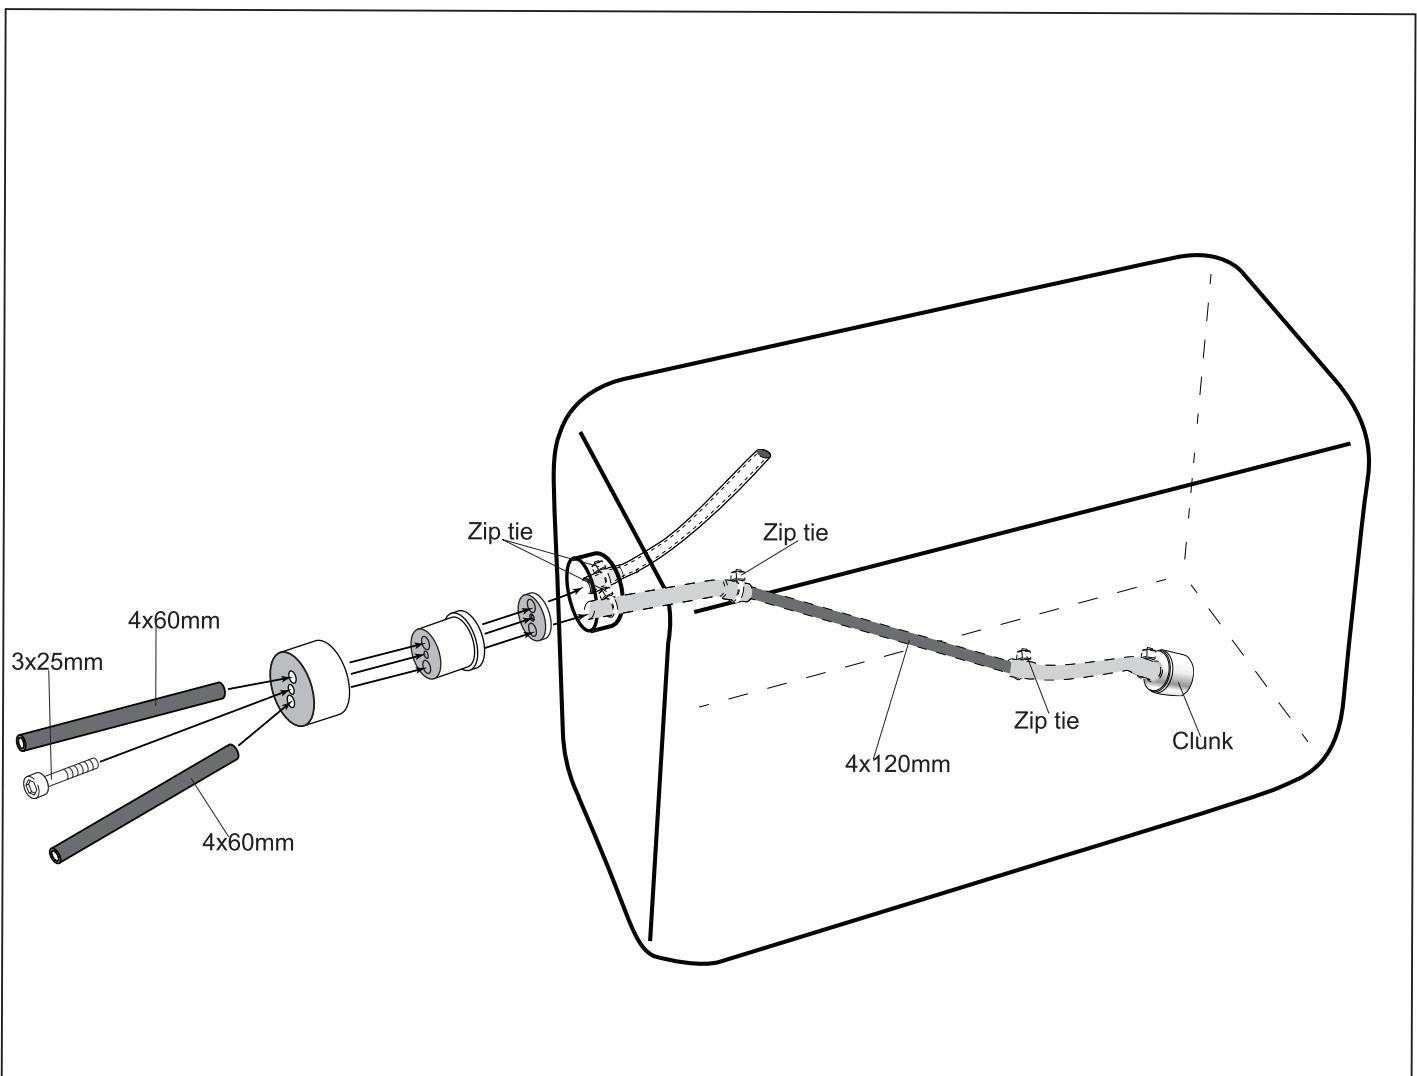


Must be purchased separately!

Pay close attention here!

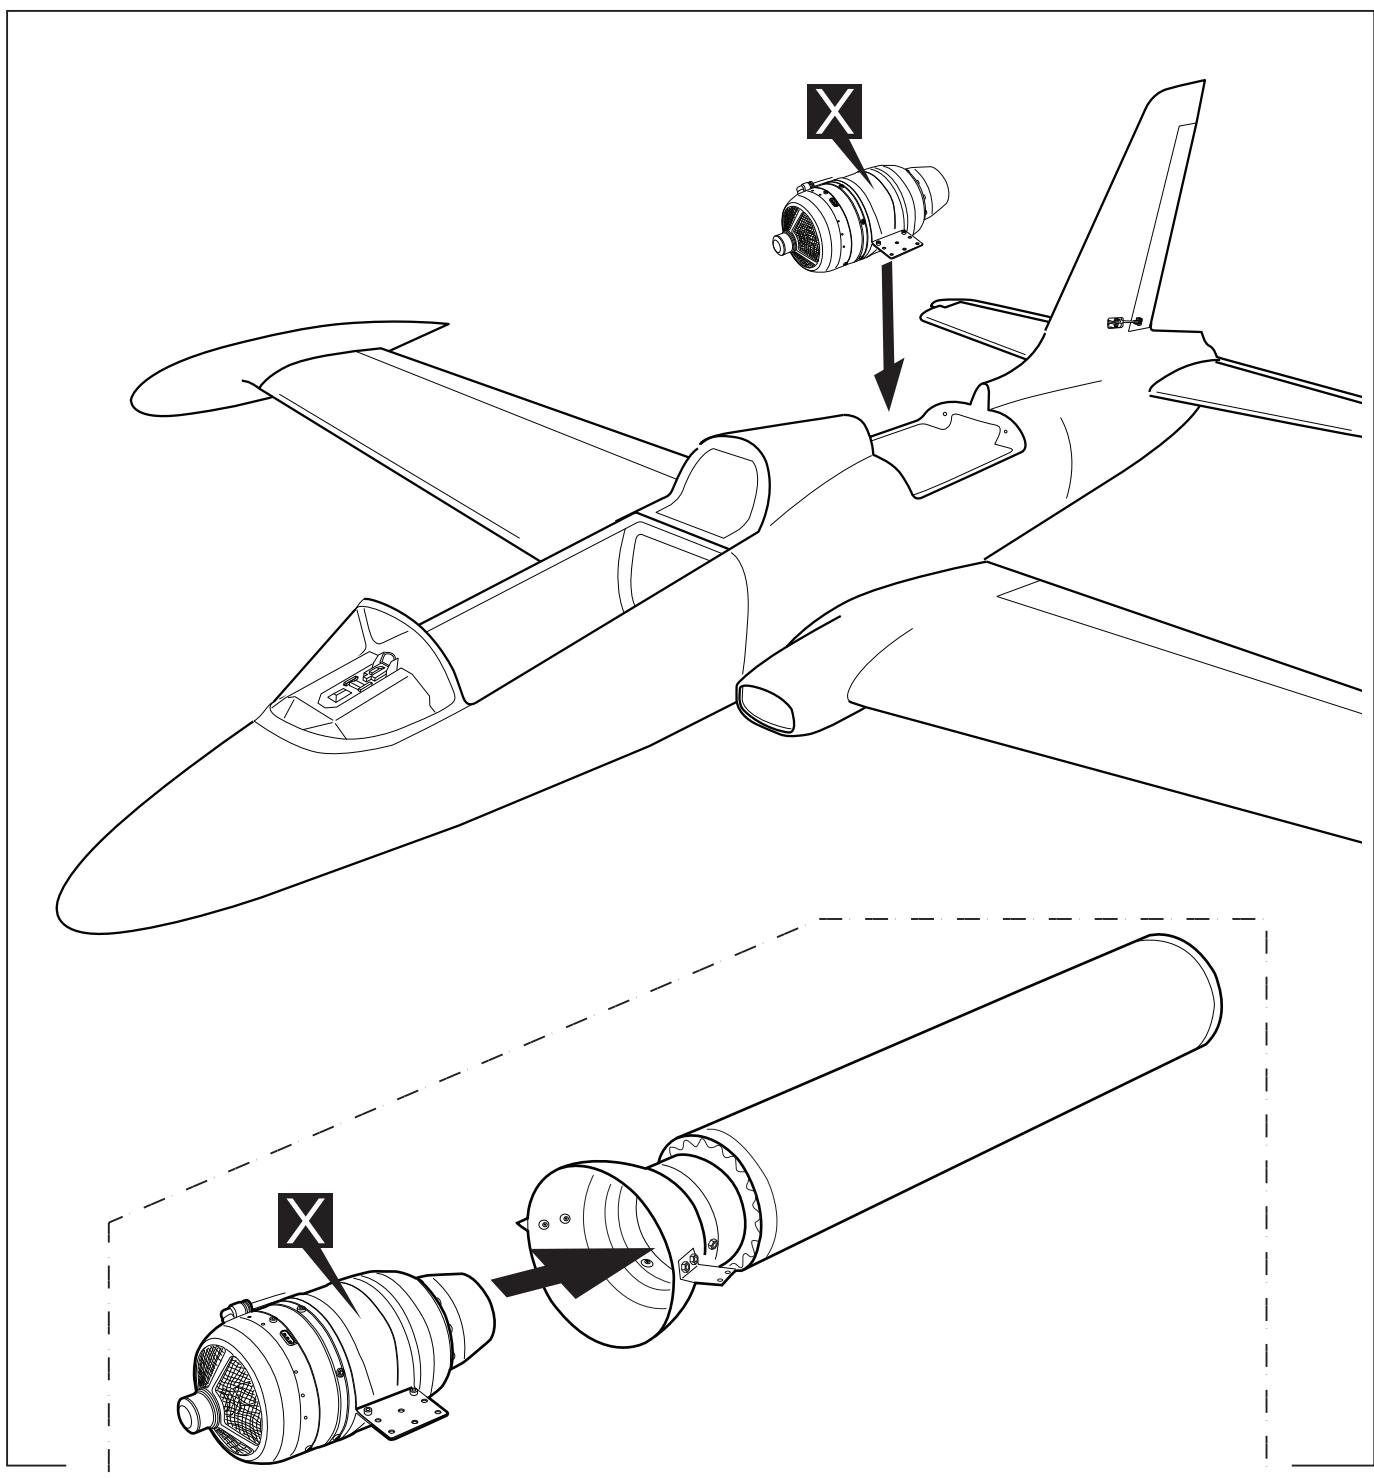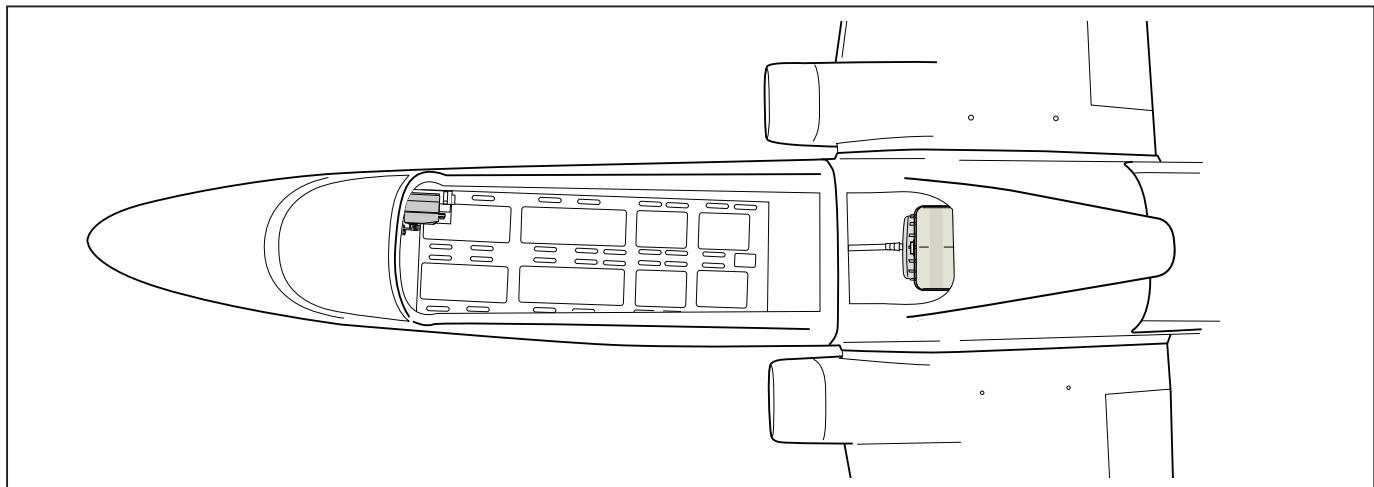

X Must be purchased separately!

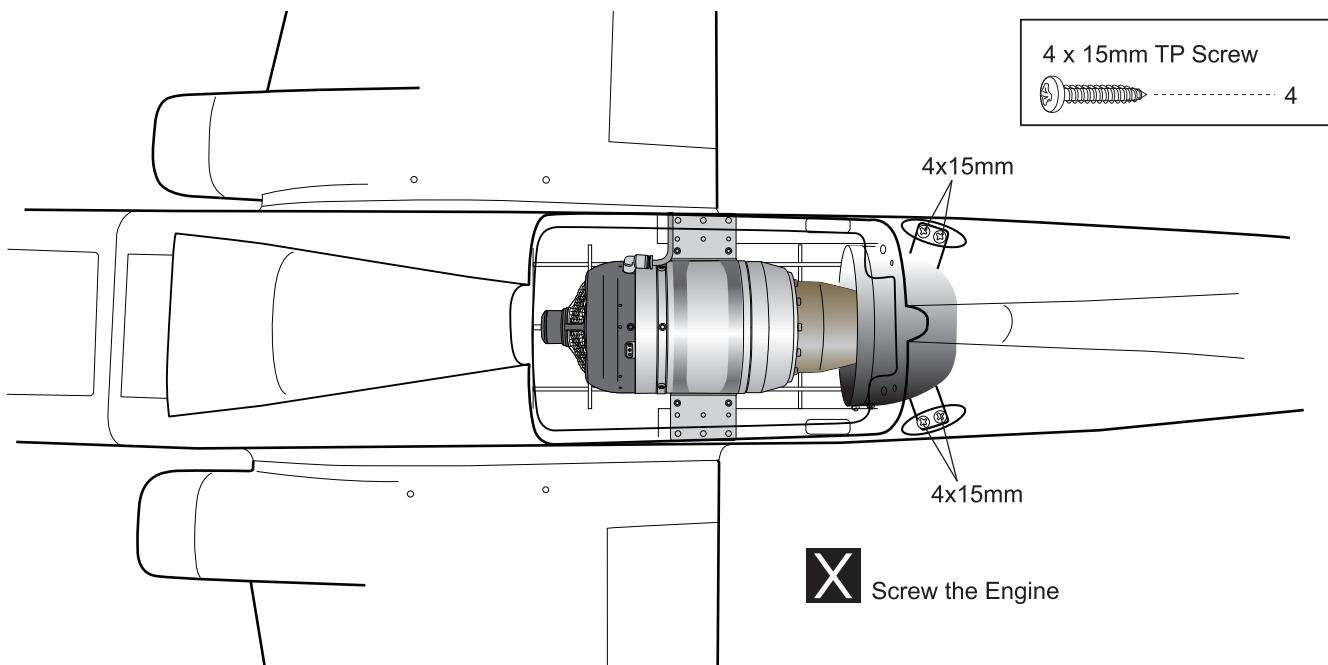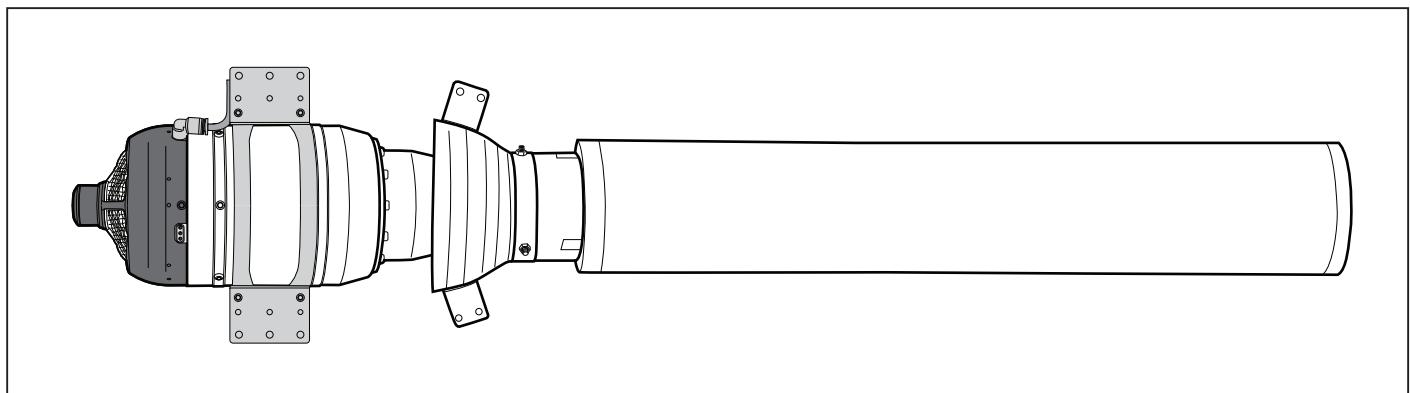

X Must be purchased separately!

BALANCING

1. It is critical that your airplane be balanced correctly. Improper balance will cause your plane to lose control and crash.




THE CENTER OF GRAVITY IS LOCATED 200mm (7.87 in) BACK FROM THE LEADING EDGE OF THE WING, AT THE FUSELAGE. BALANCE A PLANE UPSIDE DOWN WITH THE FUEL TANK EMPTY.

2. If the nose of the plane falls, the plane is nose heavy. To correct this first move the battery pack further back in the fuselage. If this is not possible or does not correct it, stick small amounts of lead weight on the fuselage under the horizontal stabilizer. If the tail of the plane falls, the plane is tail heavy. To correct this, move the battery and receiver forward or if this is not possible, stick weight into the firewall. When balanced correctly, the airplane should sit level or slightly nose down when you lift it up with your fingers.



LATERAL BALANCE

! After you have balanced a plane on the C.G. You should laterally balance it. Doing this will help the airplane track straighter.


1. Turn the airplane upside down. Attach one loop of heavy string to the engine crankshaft and one to the tail wheel wire. With the wings level, carefully lift the airplane by the string. This may require two people to make it easier.
2. If one side of the wing fall, that side is heavier than the opposite. Add small amounts of lead weight to the bottom side of the lighter wing half's wing tip. Follow this procedure until the wing stays level when you lift the airplane.

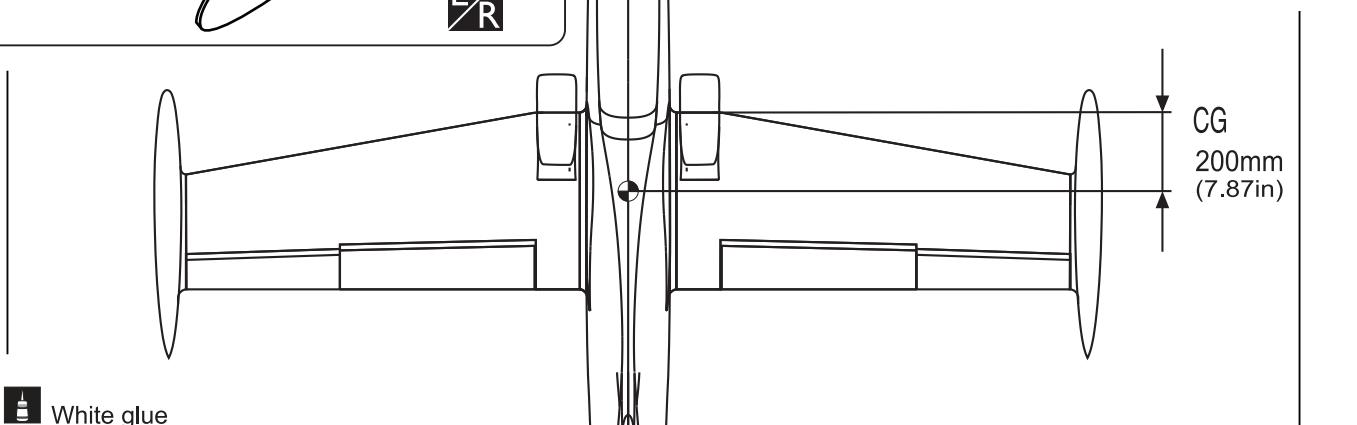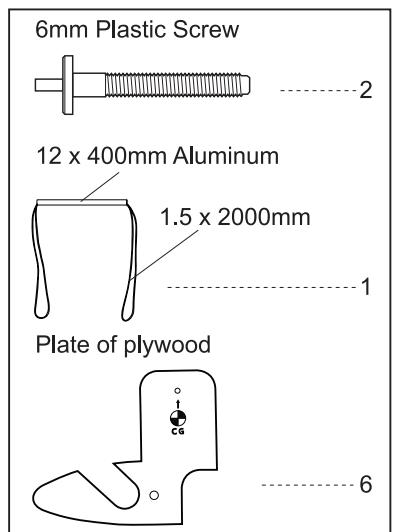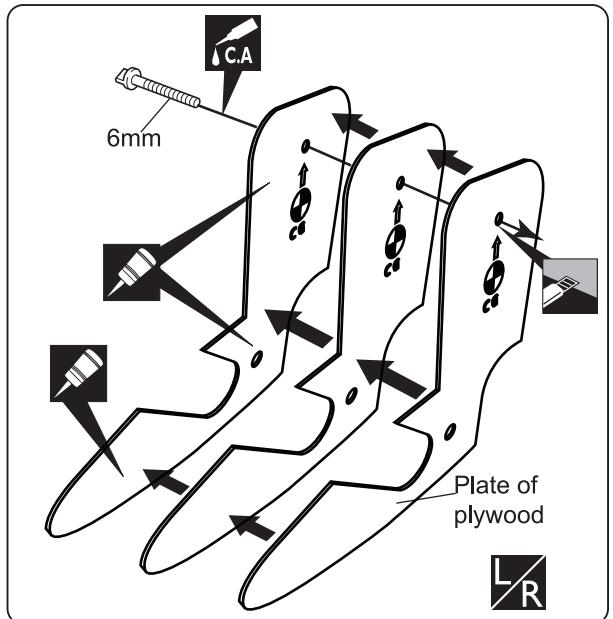

- White glue
- Apply instant glue (CA glue, super glue).
- Assemble left and right sides the same way
- Cut off shaded portion

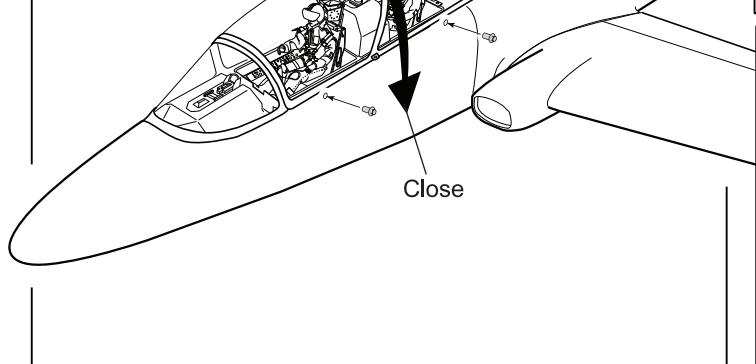
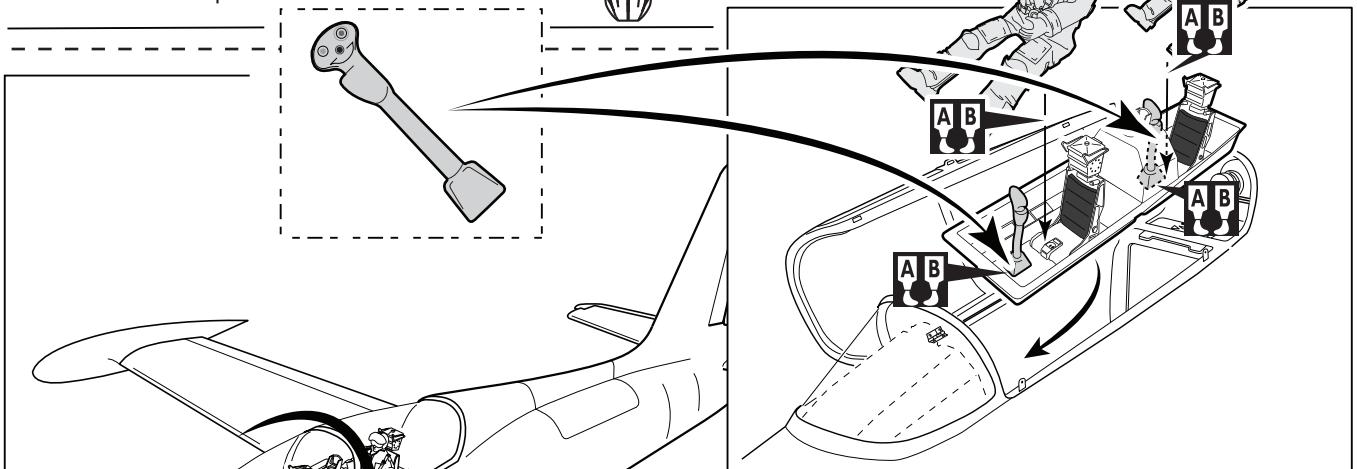





X Must be purchased separately!

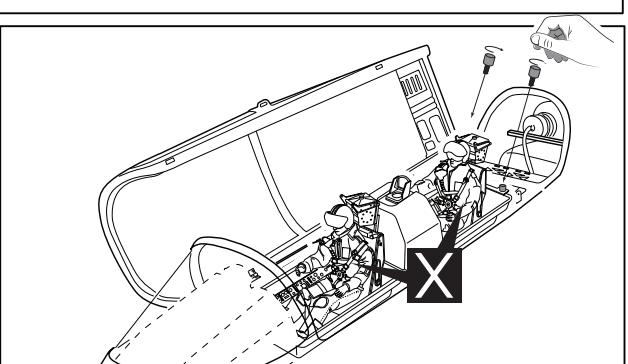

► In order to obtain the CG specified, reposition the receiver and other equipment.

► If not obtain the CG specified, add a weight and adjust.

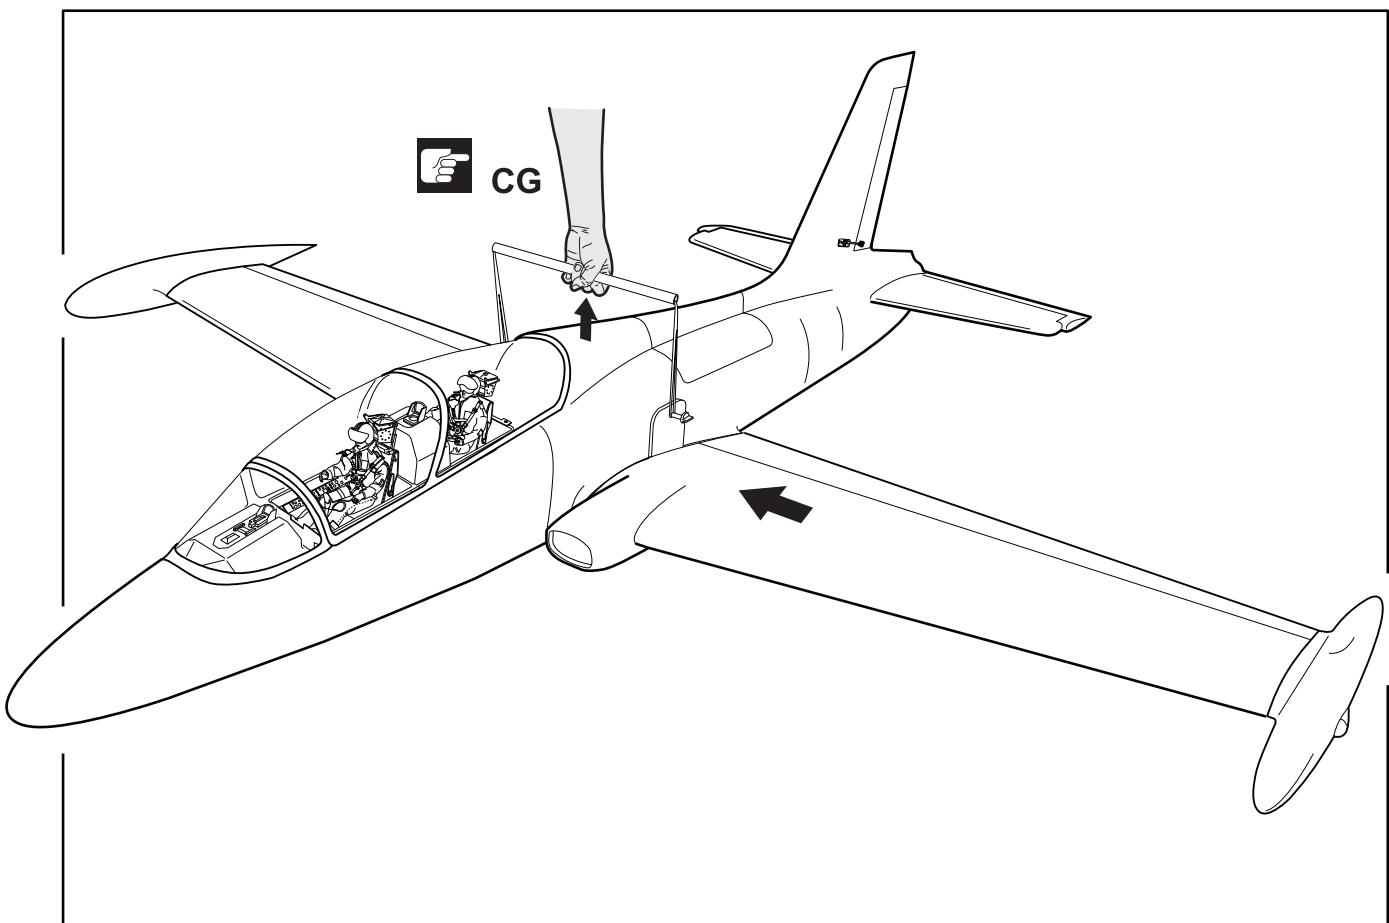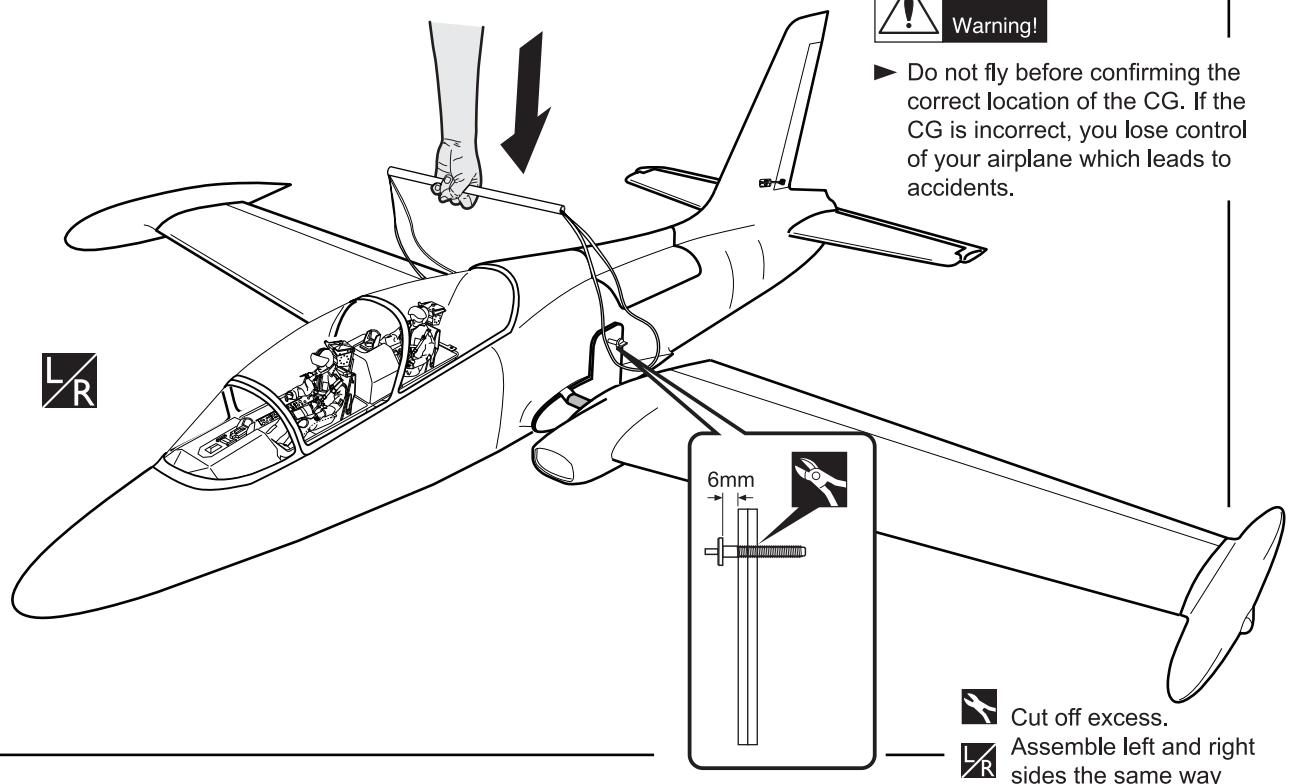






• LOW RATE

Aileron	15mm up
Elevator	15mm up
Rudder	30mm right
Flap	40mm down








FLIGHT PREPARATION PRE FLIGHT CHECK

1. Completely charge your transmitter and receiver batteries before your first day of flying.
2. Check every bolt and every glue joint in your plane to ensure that everything is tight and well bonded.
3. Double check the balance of the airplane
4. Check the control surface
5. Check the receiver antenna . It should be fully extended and not coiled up inside the fuselage.
6. Properly balance the propeller.






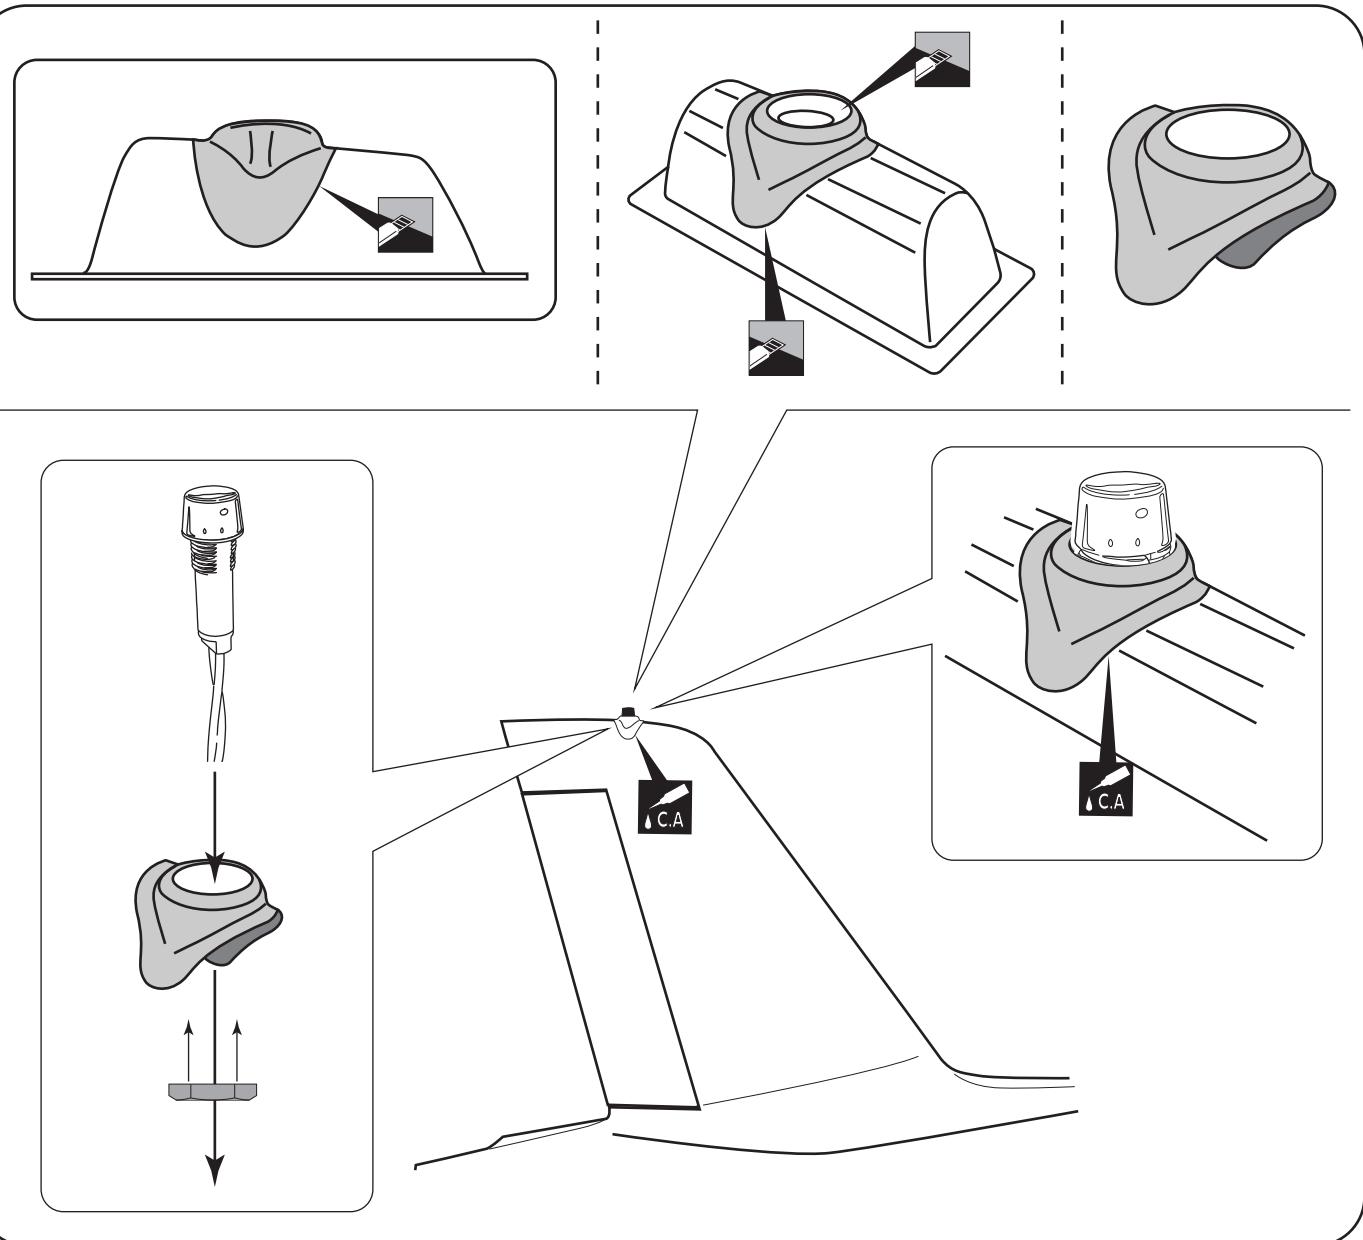


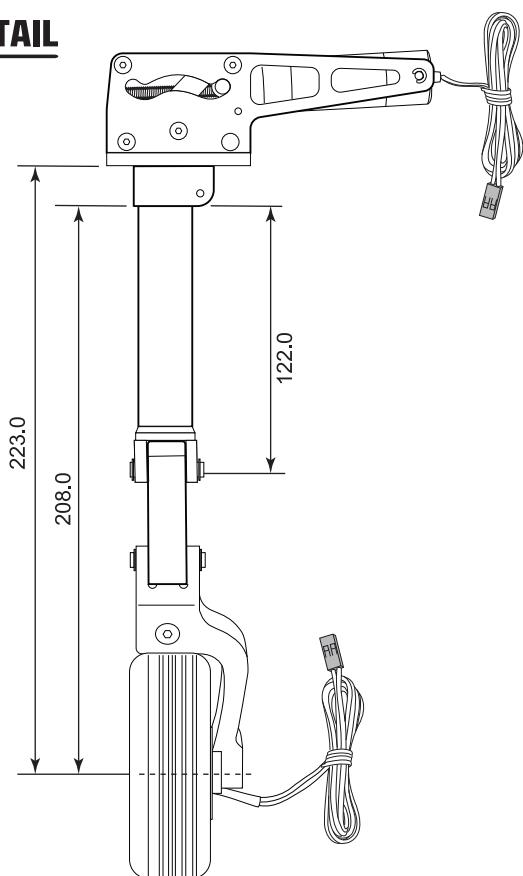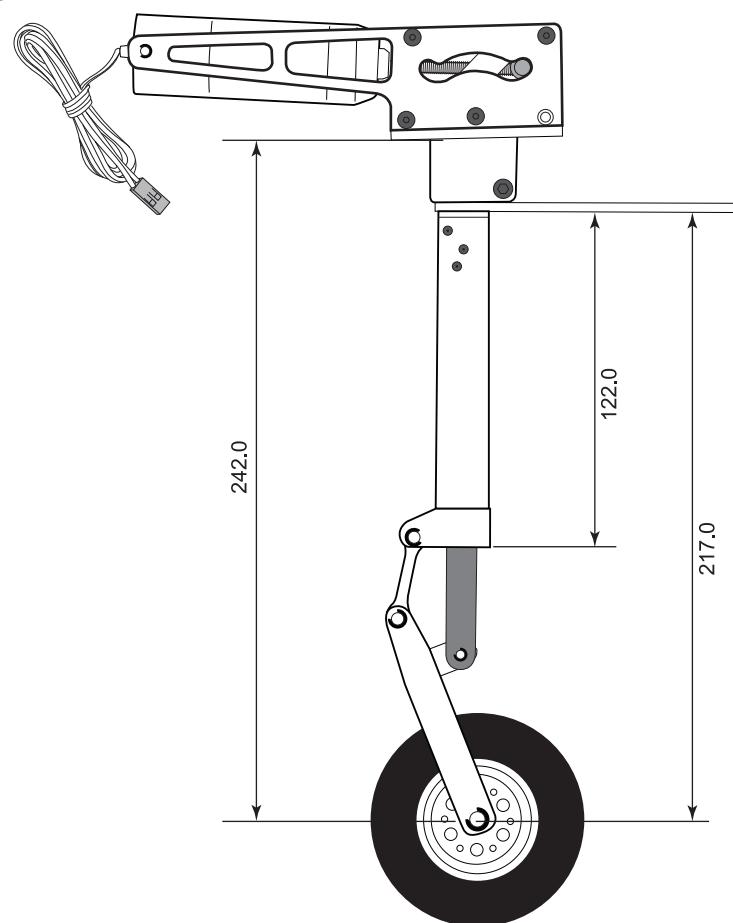MAIN GEAR DIMENSIONAL DETAIL**NOSE GEAR DIMENSIONAL DETAIL**



EXPLODED VIEW

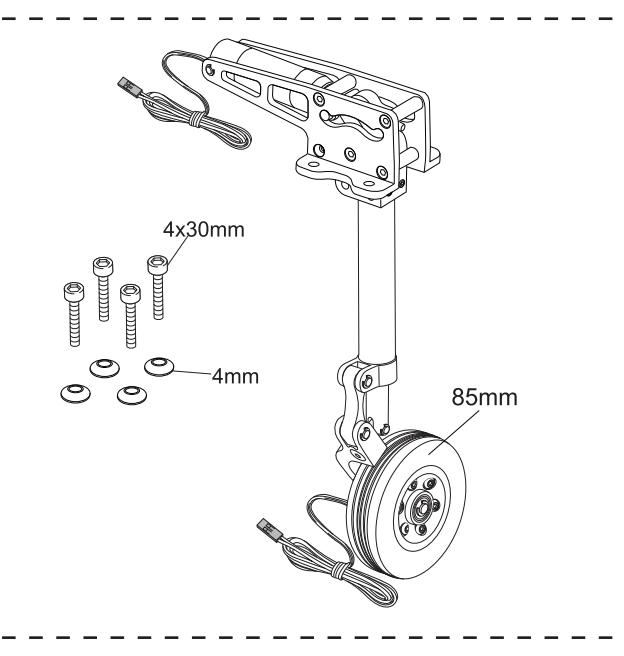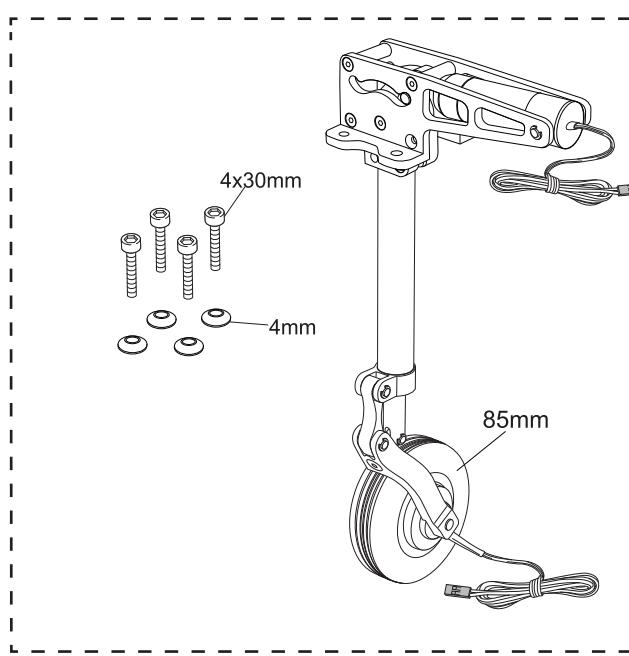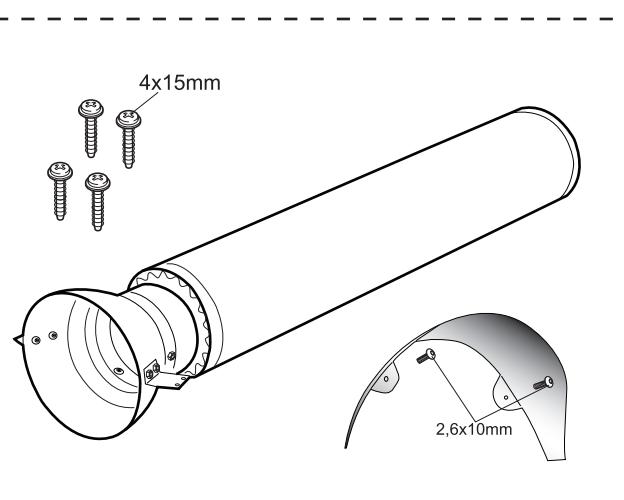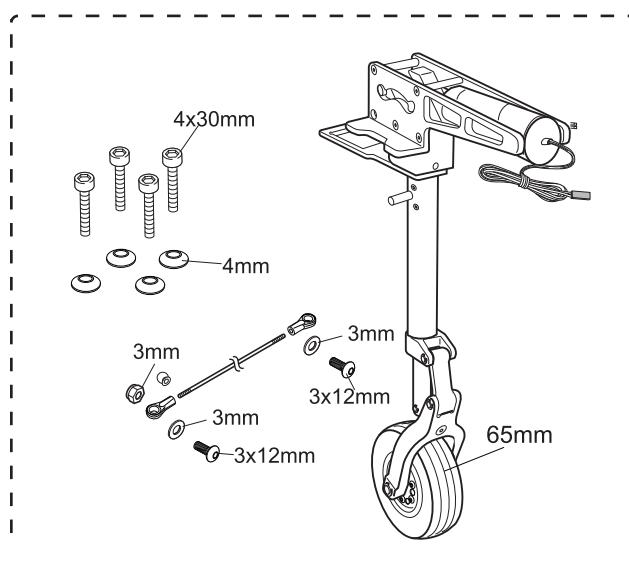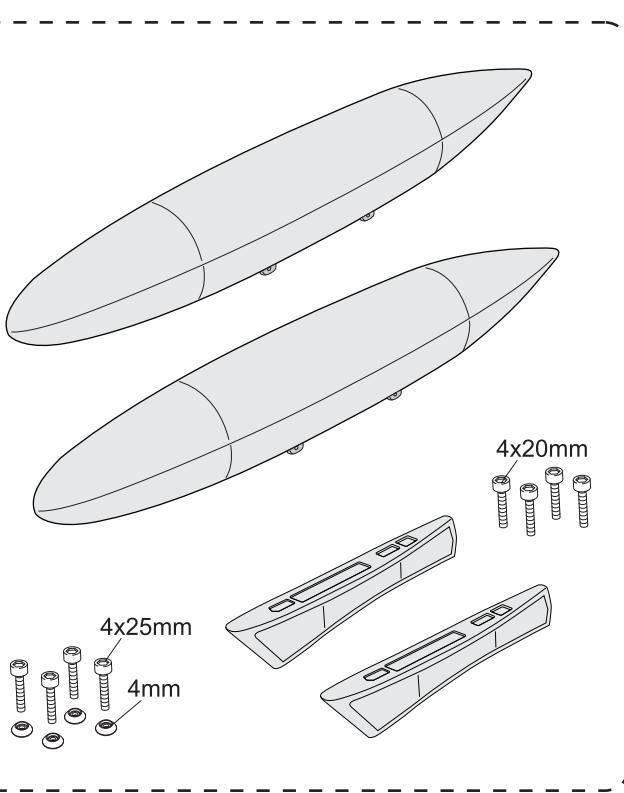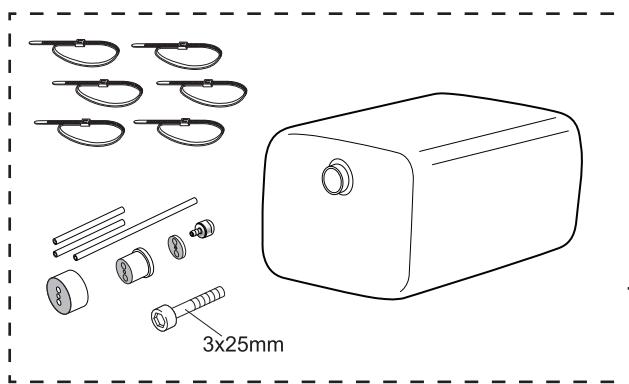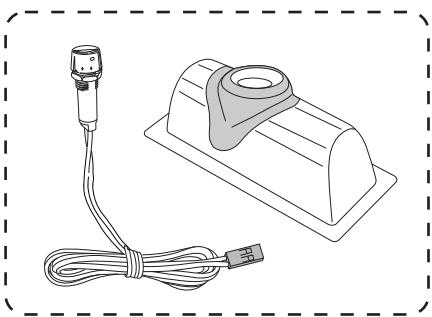

EXPLODED VIEW

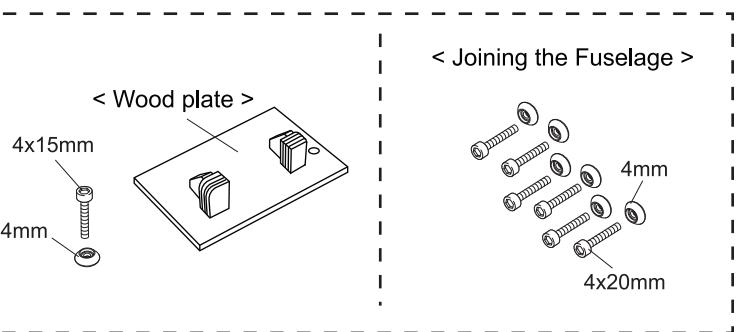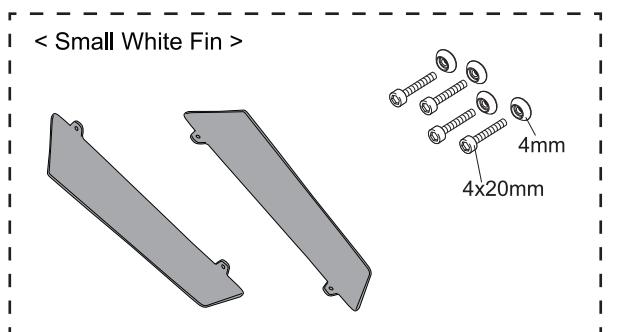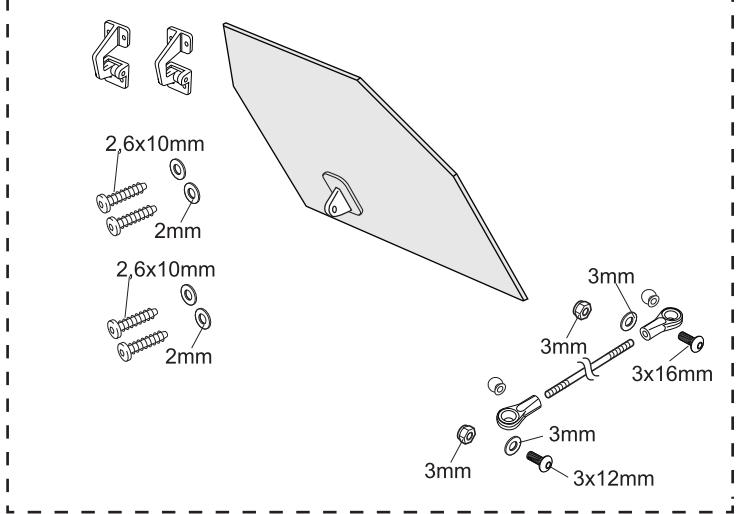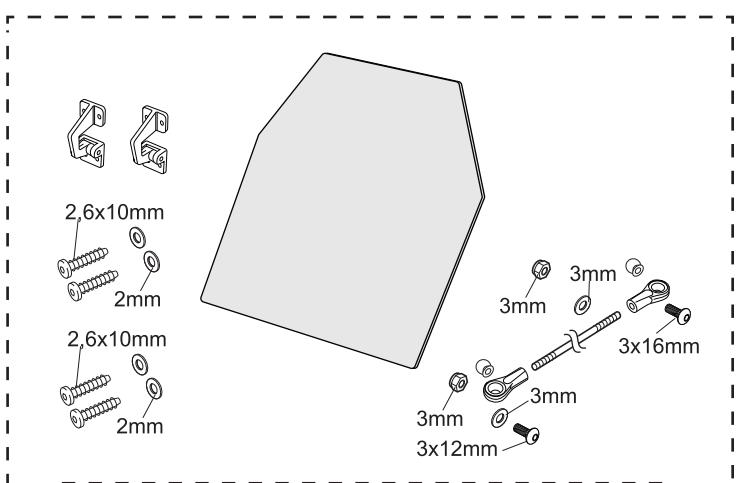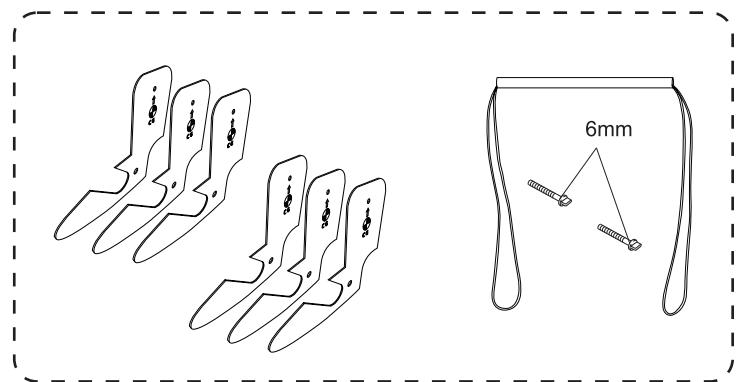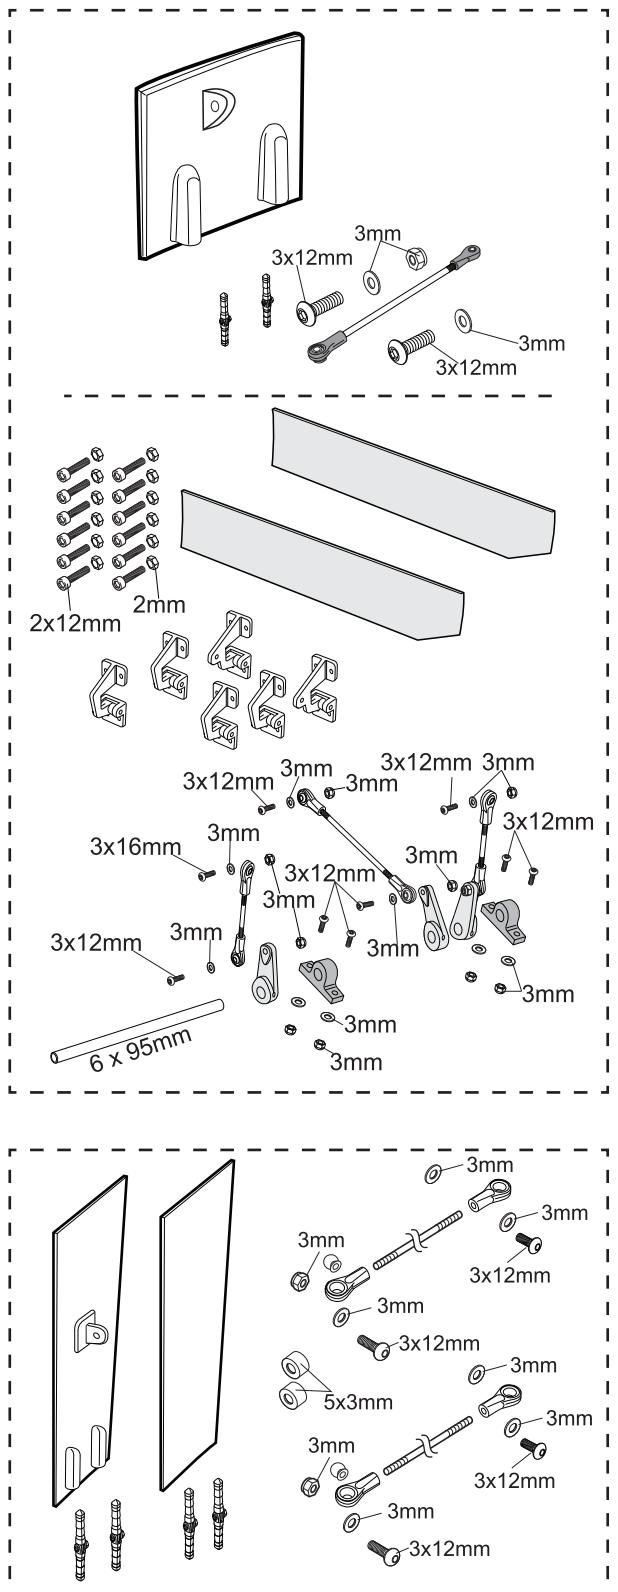

EXPLODED VIEW

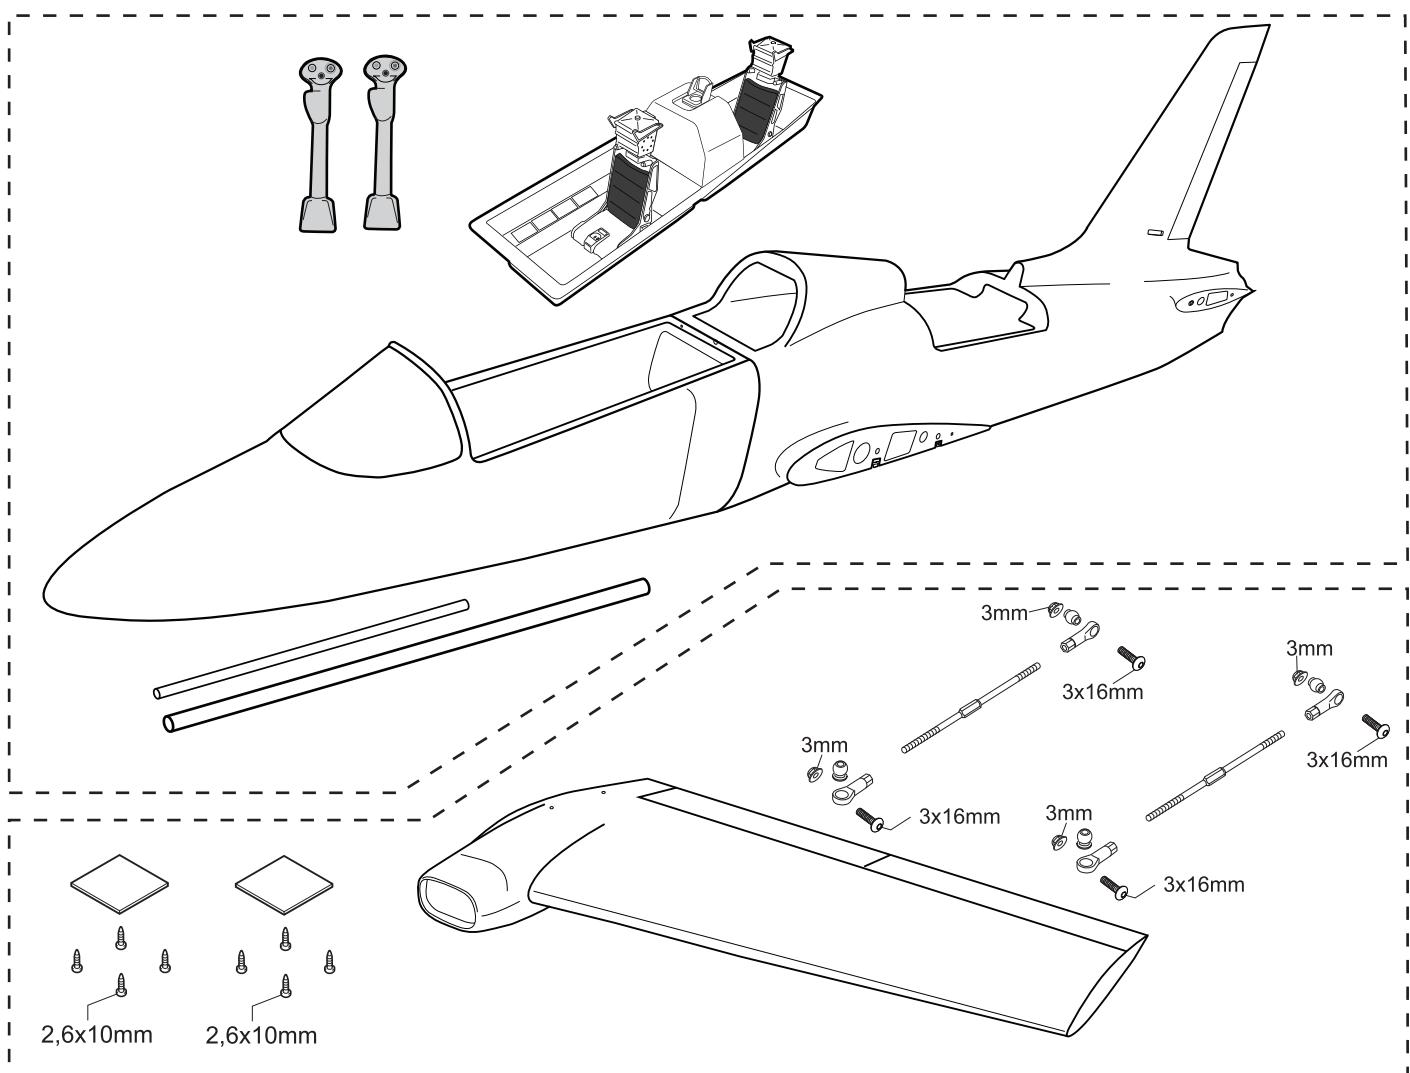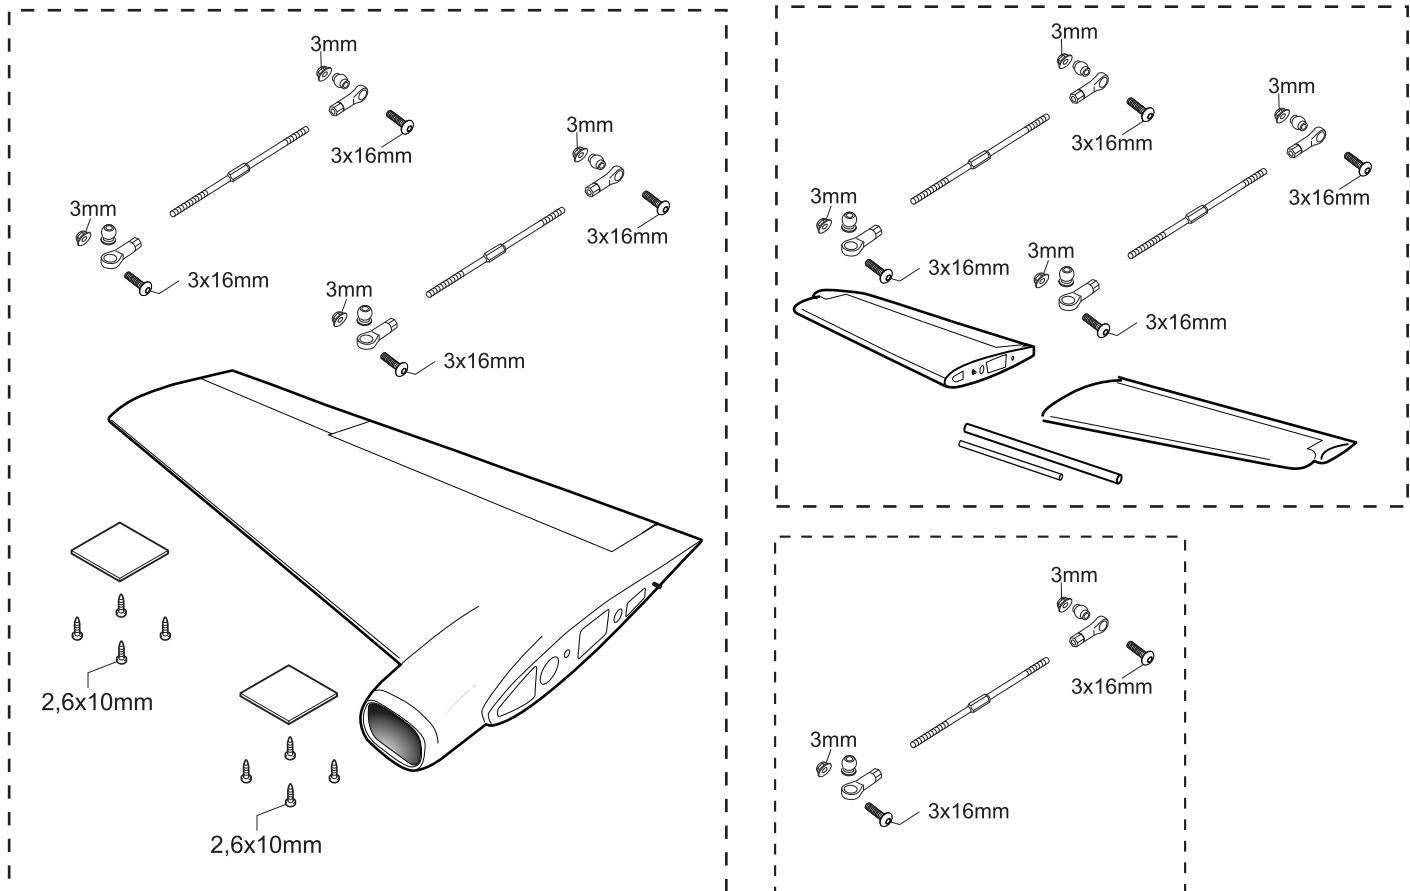

I/C FLIGHT GUIDELINES

